

# WPRW

# ПРОФЕССИОНАЛЬНЫЕ РЕЖУЩИЕ ИНСТРУМЕНТЫ

Для обработки натуральных и  
искусственных материалов  
Дерева, Панельных материалов, Алюминия,  
Пластика и тд.



 **WPRW**  
CREATIVE CUTTING SOLUTIONS

Год основания 1959

## Слово основателя

Я связан с металлообработкой, с тех пор как ребенком работал в механической мастерской моего отца еще до Второй Мировой войны.

В 1959 году я основал небольшую фабрику с двумя партнерами, и спустя два поколения она продолжает работать под брендом W.P.W. Engineering.

Мы были первой компанией в Израиле, производящей инструмент, и с каждым годом усовершенствовали свою продукцию и приобретали огромный опыт, предоставляя профессиональные решения в сфере режущего инструмента.

W.P.W. Engineering стал ведущим производителем твердосплавного инструмента и другого качественного инструмента для деревообработки. Благодаря нашим опытным работникам и постоянным улучшениям производственного процесса, мы достигли высокого качества, надежности и быстрой поставки нашей продукции по всему миру.

WPW экспортирует свою продукцию в Северную Америку, Западную и Восточную Европу, Россию, Южную Африку, Австралию и другие страны. Более 40 лет мы продавали наш инструмент под частными лейблами в США. Мы не идем на компромиссы в качестве продукции и качестве используемых материалов. Наши клиенты знают и ценят это и поэтому работают с WPW долгие годы. Вы можете найти дешевые инструменты на рынке, но, как говорится в старой поговорке: «мы недостаточно богаты, чтобы покупать дешевые вещи...»

Инструмент высокого качества WPW (некоторые из наших клиентов говорят - лучшее качество) дает отличное соотношение цены и качества.

Приглашаем Вас стать нашим партнером и присоединиться к семейству WPW с полным доверием к долгосрочному сотрудничеству.



Ханан Веребейчик  
Президент

## КАЧЕСТВО


WPW предлагает высококачественный инструмент, предназначенный для чистого резания и долгого срока службы. Соблюдение нашей строгой системы допусков гарантируется контролем качества на протяжении всего производственного процесса. Наши станки с ЧПУ способствуют этому процессу.

Система контроля качества обеспечивает нам точные размеры, минимальное биение, правильные углы заточки, качество шлифования и пайки

Фрезы изготовлены по конструкции «без отдачи» в соответствии с требованиями безопасности Немецкой торговой ассоциации деревообработчиков BG-TEST сертификат № 159-000.



Весь инструмент имеет гарантию на производственный брак или брак материала. Гарантия не распространяется на случаи неправильного применения и эксплуатации инструмента.

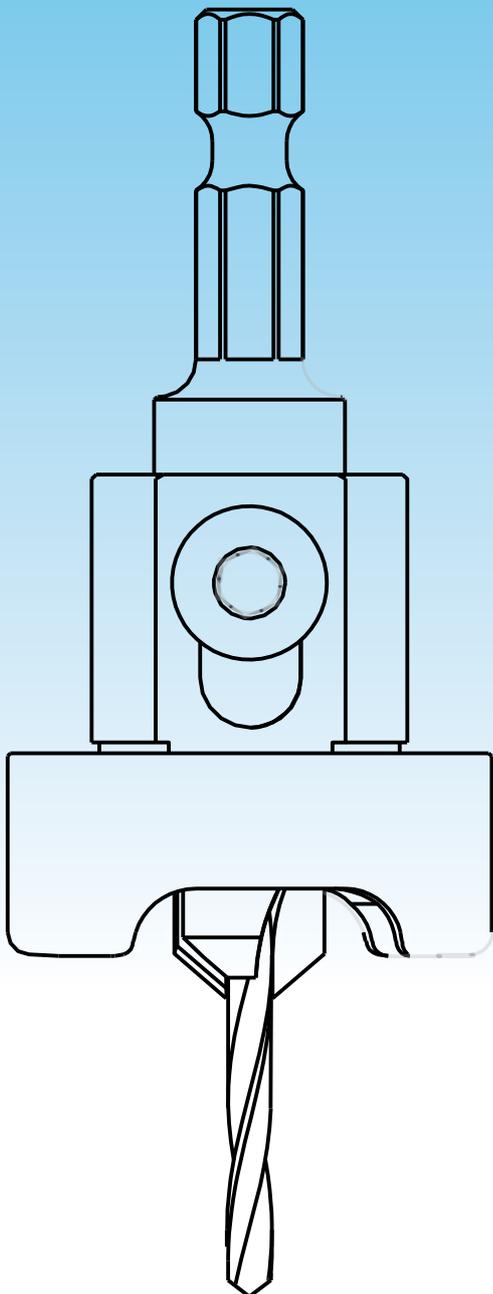

■	Указатель серий инструмента.....	5
■	Зенковки и сверла .....	8
■	Промышленные сверла.....	20
■	Алмазные концевые фрезы.....	25
■	Профессиональные фрезы.....	28
■	Фрезы для акрилового камня...	73
■	Фрезы серии WoodPecker.....	77
■	Запасные части.....	82
■	Техническая информация .....	86
□	Алфавитный указатель.....	90

## Инновационные решения от WPW

В этот каталог мы добавили много нового инструмента, отмеченного специальными логотипами:



Уникальный инструмент, заслуживающий особого внимания. Среди них: Зенковки с вращающимися ограничительными кольцами, ступенчатые сверла, переходники для сверла; концевые фрезы с 3 и 4 режущими кромками, миниатюрные концевые фрезы, мини обгонные фрезы.



Инструменты с упрочненным твердым сплавом с повышенной износостойкостью K-Carbide - идеально подходят для работы на станках ЧПУ и для работы на ручном фрезере. Предназначены для обработки МДФ, ЛДСП и других абразивных материалов. Ресурс до переточки увеличивается до 200% при фрезеровании абразивных материалов.



NANO Router Bits – мини фрезы с уникальным обгонным подшипником D4,8мм - самый маленький на рынке. Этот инструмент позволяет обработать заготовки со сложным рисунком и с острыми углами, где обычные инструменты не пройдут из-за большого диаметра.



## Зенковки WPW для Festool

Зенковки со специальным хвостовиком – совместимы с патроном Festool® CENTROTEC.



Этот инструмент дополняет ассортимент Festool твердосплавными зенковками.

Страницы : 10, 12, 14

## Фрезы для изготовления музыкальных инструментов



### Binding/Rabbeting Set

The sets include five different bearings that allow producing 10 different rabbets from just 1.0mm rabbet up to 5.5mm (in 0.5mm increments).  
Page: 50




## Новые зенковки с ограничителем подачи эконо серия

Твердосплавные зенковки с ограничителем глубины сверления.

Идеальный выбор для DIY!

Страница: 13



## Адаптер для зенковок с микро регулировкой глубины

Профессиональный адаптер с микрометрическим ограничителем глубины.

Адаптер подходит для стандартных зенковок WPW и позволяет регулировать глубину зенкования с точностью 0,1 мм

Страница: 12



## Чашечное сверло 35 мм со стопорным кольцом

Гарантия от сквозного сверления.

Простой контроль глубины.


Стр. 15



## Миссия невыполнима? Уже нет


Миниатюрные копируемые фрезы могут это сделать!

Наконец-то, копируемый подшипник имеет тот же диаметр, что и хвостовик или даже меньше. Маленькие диаметры мини фрез очень важны при обработке сложных форм. Стр. 40



## Мини подшипник и мини фреза

Nano фрезы – размер имеет значение

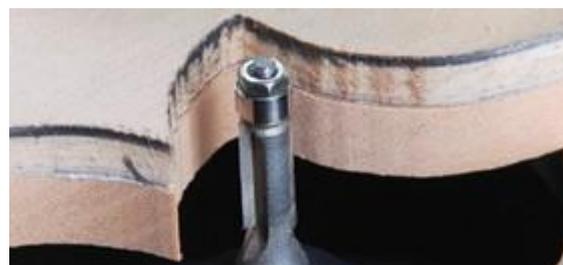

4,8mm направляющий подшипник – самый маленький в деревообработке.

Ищите логотип NB в каталоге и посмотрите на ассортимент Nano фрез. Стр. 40, 42, 45, 47, 60, 63

**Больше режущих граней,  
чище поверхность и  
больше ресурс**



### Фрезы Z3 и Z4 для экстра чистого реза

Всегда чисто - больше не нужно шпаклевать вырванные участки и зашкуривать сколы после фрез с двумя режущими гранями.  
Стр. 34, 37, 39, 41, 43, 46, 47, 48, 49, 50, 64, 65

### Нужно выровнять древесину?

#### Фреза для выравнивания поверхности

Для зачистки и выравнивания слэбов из дерева. Подходит для обработки композитных материалов. Для использования в ручных фрезерах и станках ЧПУ. 3 или 4 лезвия для гладкой поверхности. Страница: 35



### Один инструмент – много применений

#### Фрезы дисковые с торцевым креплением

Для торцевых пазов и подрезки. Подходит для монтажа ламинатных полов. С помощью разных подшипников разного диаметра можно менять глубину паза - 3, 4, 5 и 6мм.  
Для использования в ЧПУ необходимо снять подшипник.  
Стр. 71



### Нужна длинная фреза, и не можете найти?

#### Удлинитель цангового патрона

Для ЧПУ станков и ручных фрезеров. Предназначены для увеличения глубины фрезерования. Особенно когда фрезы имеют короткий хвостовик. Стр. 79



### Новая линия фрез для искусственного камня Фрезы для обработки искусственного камня (Corian®)

Широко используется для изготовления кухонных столешниц, стерильных зон, ресепшен. Специальный подшипник в обойме из фторопласта Delrin® с низким коэффициентом трения защищает поверхность материала от царапин и поджогов.  
Стр. 73 - 76



### Фрезы с поликристаллическим алмазом

Разработаны специально для ЧПУ станков. Ресурс этого инструмента в 30-50 раз больше чем твердосплавного. Отлично подходит для обработки хрупких и высокоабразивных материалов как ЛДСП, МДФ, ХДФ НРЛ пластик.




### Больше возможностей Фрезы с осажденным алмазом


Фрезы с алмазным напылением для обработки композитных материалов на основе углеволокна и стекловолокна.

Стр.27


# Зенковки и сверла

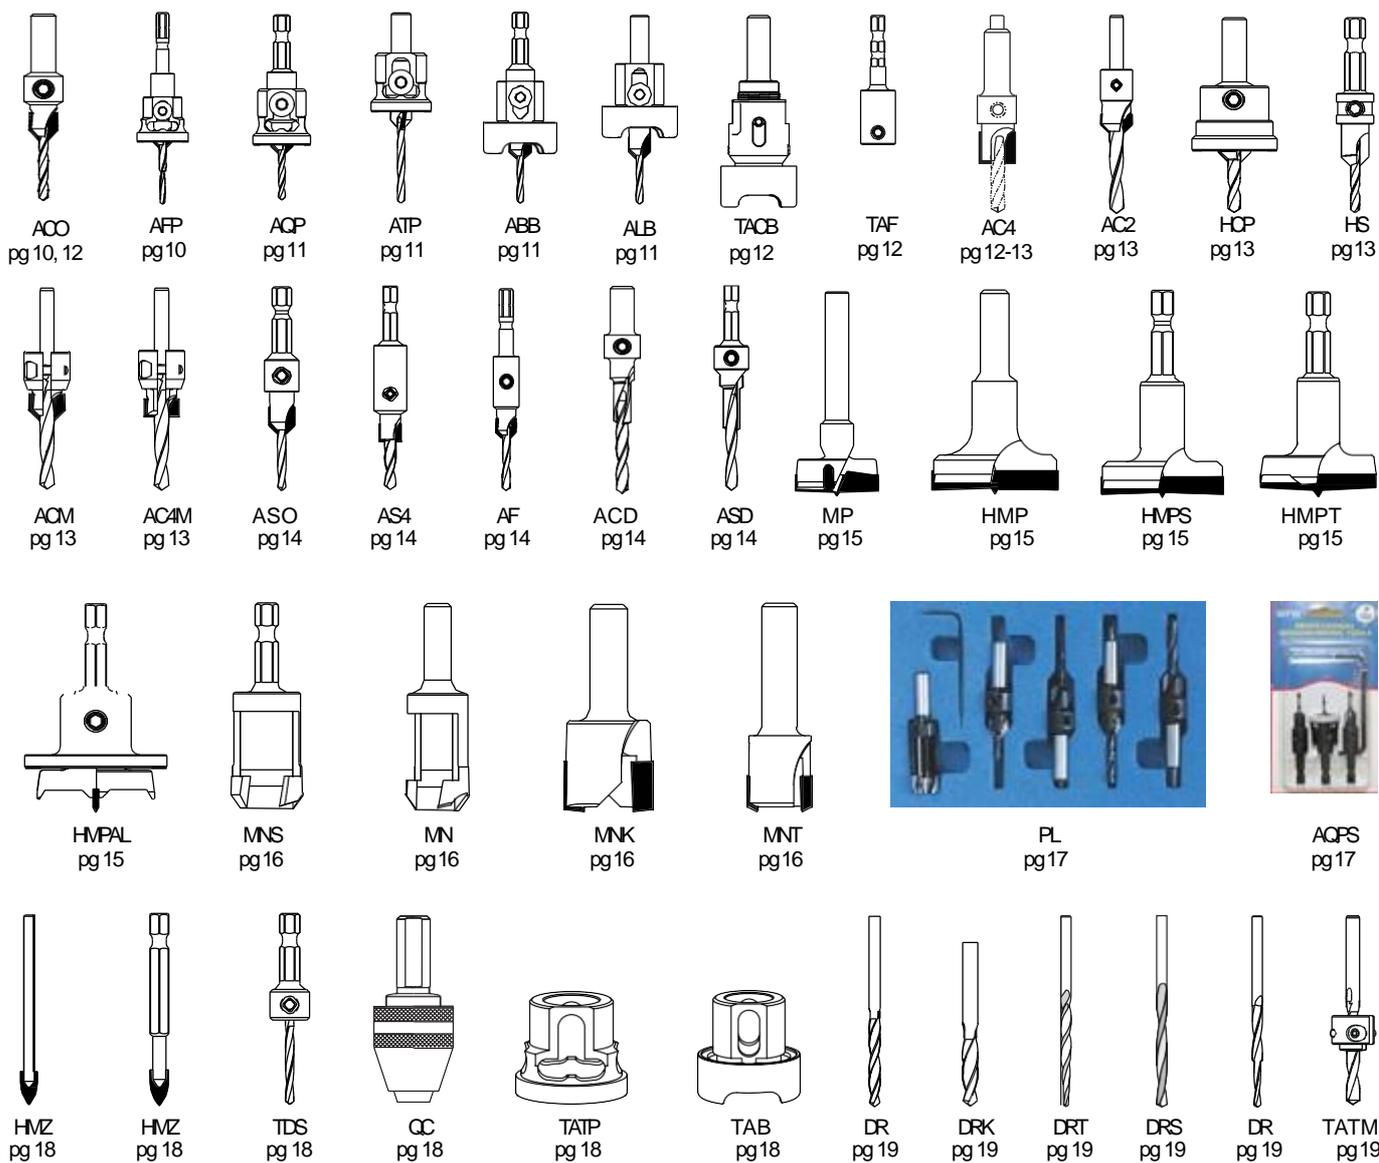


# Промышленные сверла

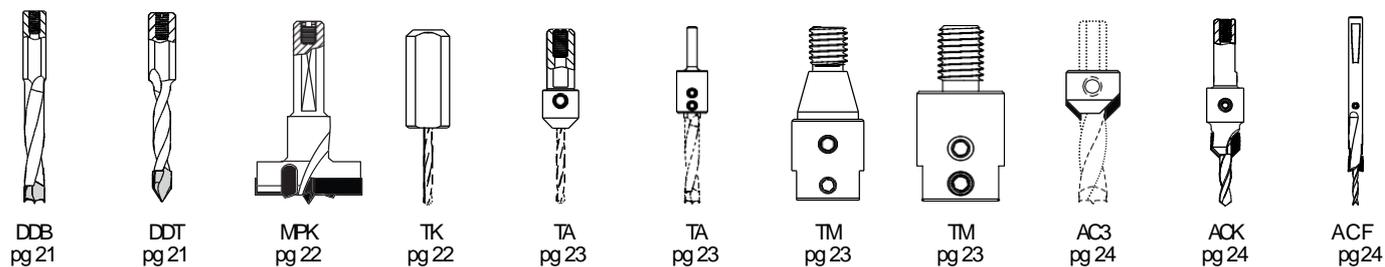

# Алмазные концевые фрезы

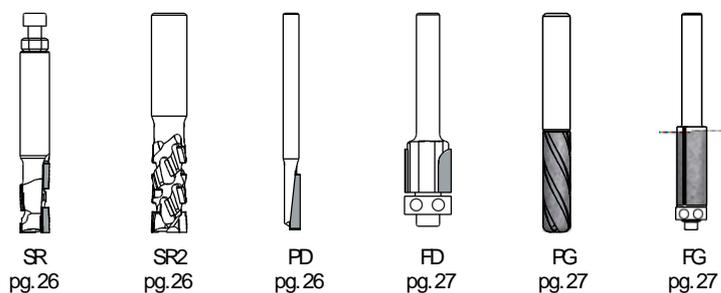

# Профессиональные концевые фрезы



SCU/SCS  
pg. 29



SOC  
pg. 29



P2  
pg 30-32



PT  
pg 32



P1  
pg 33




P..L  
pg 33




PS  
pg 34



ST  
pg 35



P3/P4  
pg 35



MB..0  
pg 36



DT  
pg 36




UB  
pg 37



PF  
pg 38



PFS  
pg 39




P3FU  
pg 39



PFT  
pg 40




PFM  
pg 40



FPS  
pg 41



F4P  
pg 41



FPM  
pg 41



F  
pg 42-43



F  
pg 43




FM  
pg 44



FT  
pg 44




FS  
pg 45




FSG  
pg 45




SL  
pg 45-46



EM  
pg 48




E  
pg 47-49




E3SG  
pg 50




PP  
pg 50




SCF  
pg 51




SCSL  
pg 51



SE  
pg 52




V  
pg 53



VE  
pg 53



Z  
pg 54




ZB  
pg 54



RU  
pg 55




RB  
pg 55



DB  
pg 56



RBL  
pg 56



RV  
pg 56



RH  
pg 57




RC  
pg 57




DC  
pg 57



DM  
pg 58




RA  
pg 58




RRC  
pg 58




RR  
pg 58



DL  
pg 59




RR  
pg 59




RRI  
pg 59



MM  
pg 59




MM  
pg 59



RS  
pg 60




RD  
pg 60



RJ  
pg 60




RT  
pg 61




R  
M  
pg 61



RZ  
pg 61




RN  
pg 62




RL  
pg 62



RW  
pg 62-63




RW  
G  
pg 64



RWB  
pg 64



RF  
pg 64




R045  
pg 65




REOG  
pg 65




RO  
pg 65




RO  
pg 65




RKO4  
pg 66




RK  
pg 66



RK15  
pg 66

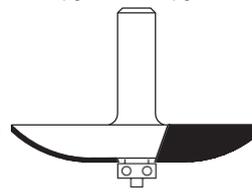


RK40  
pg 66




RK43  
pg 67


## Профессиональные концевые фрезы

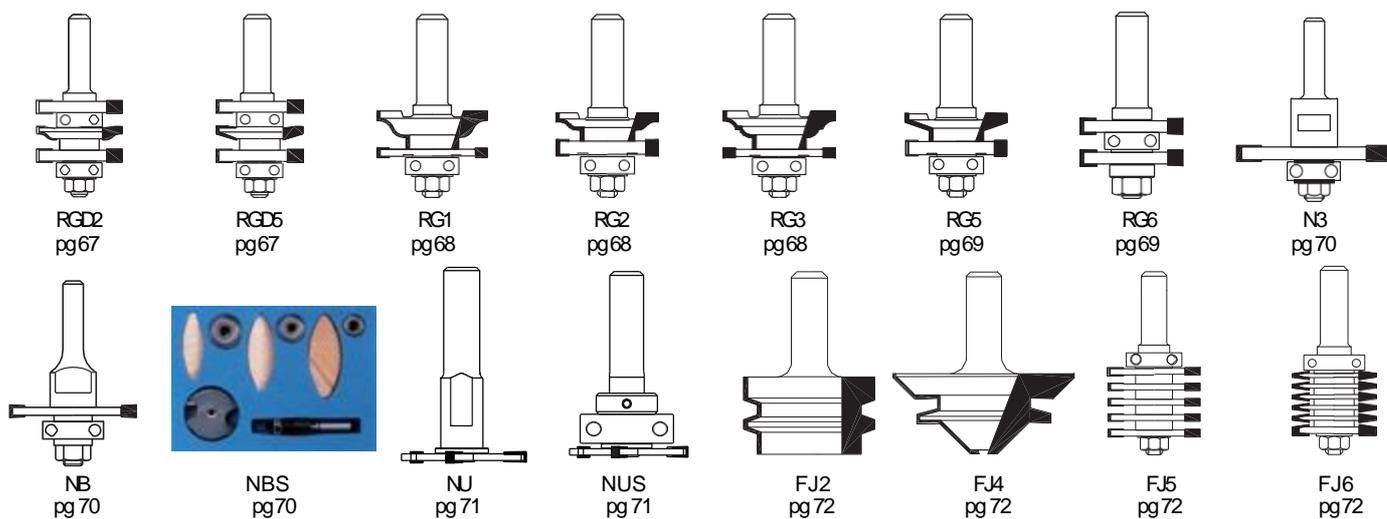

## Фрезы для искусственного камня

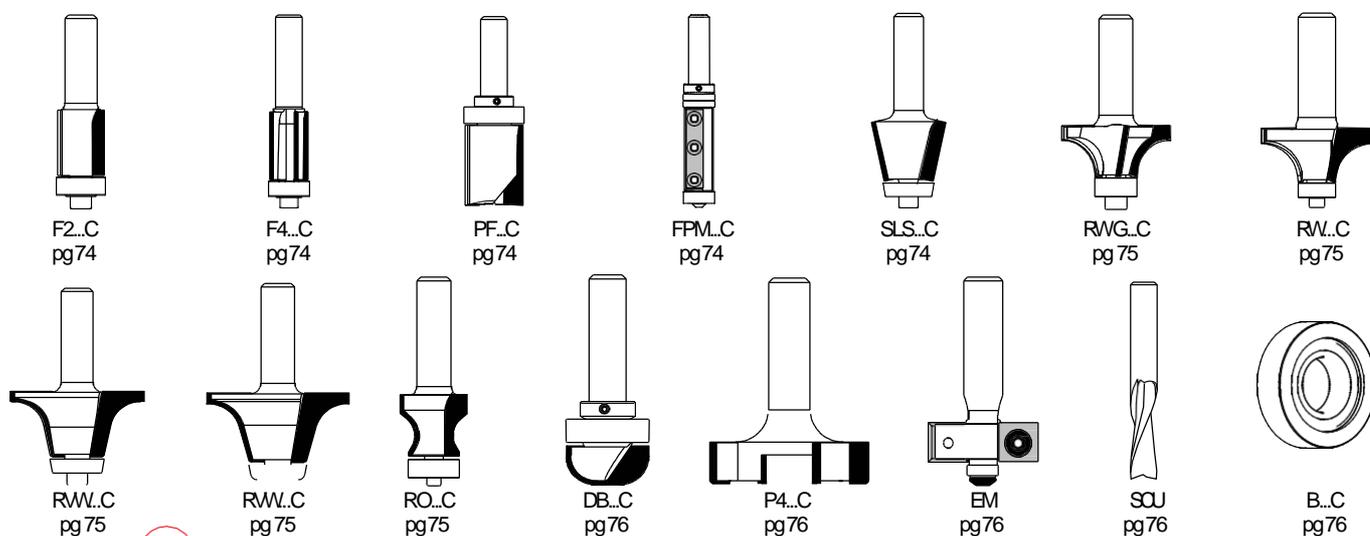

## Запасные части

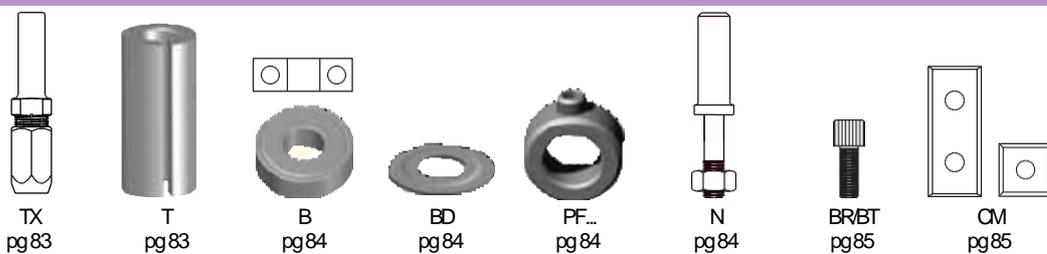

# Зенковки и сверла

В этом разделе Вы найдете инструменты для аккуратного крепления деталей саморезами, винтами, и болтами.

Рекомендации и советы WPW помогут Вам избежать проблем, трещин и сколов при работе с саморезами и болтами. Установка террасной доски, крепление в торец деталей, отделочные работы, сборка изделий из дерева и фанеры.

Здесь Вы найдете инновационные инструменты: специальные ступенчатые сверла, вращающиеся стопорные кольца и наборы для скрытого крепления «Plug Sets».

Обратите внимание на различные хвостовики: круглые, быстросменные шестигранные (система Quick-Change - 6,3 мм), хвостовики совместимые с системой Festool® CENTROTEC®



2010



2013



2015



2016

Начало производства

# СОЕДИНЕНИЯ С ПОМОЩЬЮ САМОРЕЗОВ НЕ ТАКАЯ ПРОСТАЯ РАБОТА

## Секреты WPW помогут Вам избежать проблем с растрескиванием древесины при закручивании крепежа

При соединении угловых деталей чтобы избежать трещин важно заранее просверлить

- Отверстие для резьбы - в нижней детали.
- Зенковку и пилотное отверстие - в верхней детали.

Важно понимать, что отверстие для резьбы должно быть меньше диаметра самореза

Пилотное отверстие должно быть немного больше диаметра самореза.

При работе с террасной доской сверлить отверстие под резьбу не обязательно, поскольку нижняя деталь скрыта от глаз.

### Если не делать отверстий под резьбу


Если не сверлить отверстий под резьбу, возникнут трещины особенно на плотной древесине, торцы панельных материалов разойдутся. Трещины могут появиться сразу или со временем, поскольку древесине не будет места для расширения и сужения при изменении влажности.

**Избегайте трещин – просверлите отверстие под резьбу!**

### Зенкование и пилотное отверстие

Пилотное отверстие позволяет саморезу свободно проходить через верхнюю деталь и закручиваться только в нижнюю. Детали плотно притягиваются друг к другу без зазора без зазора.



Зенкование позволяет избежать трещин на краях детали и установить саморез в уровень или ниже поверхности детали. Ограничитель глубины позволит Вам делать тысячи одинаковых отверстий под саморезы.

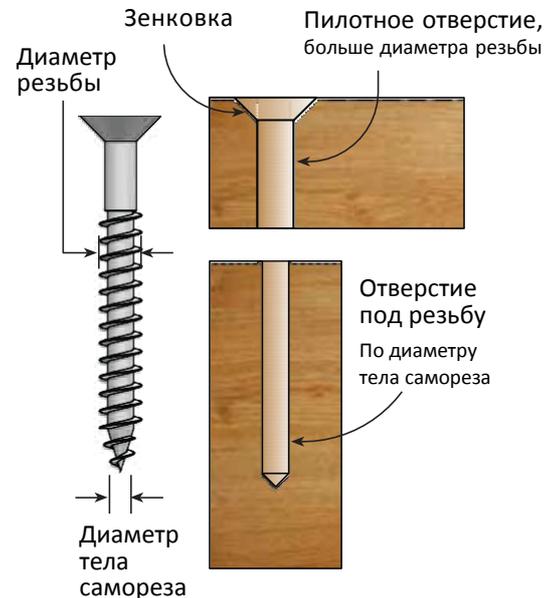

**WPW!**  
Нужна твоя помощь!



**Нет проблем!**  
Используйте зенковку и ограничитель глубины WPW.

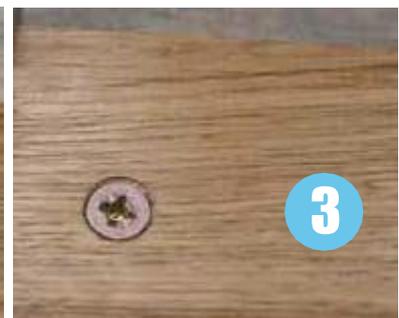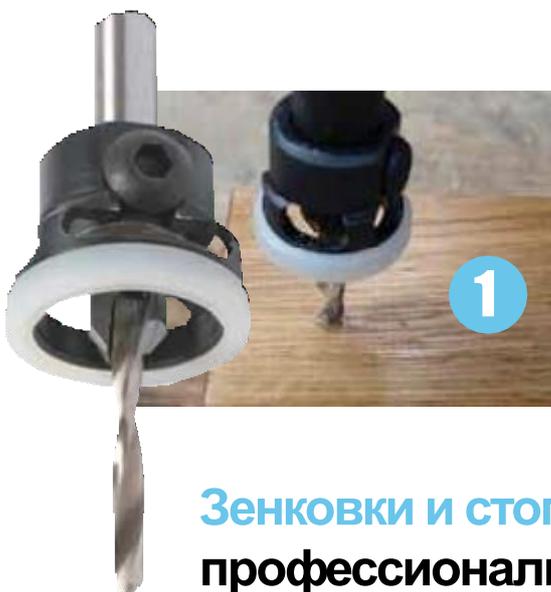

**Зенковки и стопорные кольца WPW для профессиональных и надежных соединений**



Ограничитель глубины WPW - всегда нужная глубина

## Как подобрать сверло для самореза

Нас часто спрашивают: «Какое сверло нужно использовать для конкретного винта или самореза?» Ответ не прост из-за разницы между диаметром пилотного отверстия и отверстия под резьбу.


Для разных применений требуются разные сверла:

1. Для соединения деталей в торец = зенковка+пилотное отверстие+отверстие для резьбы. Используйте ступенчатые сверла. Хорошей альтернативой могут быть сверла с конической заточкой.
2. Террасная доска = зенковка+пилотное отверстие. Поскольку не обязательно сверлить нижнюю деталь.
3. Крепеж мебельной фурнитуры, такой как петли. Требуется только направляющее отверстие под фурнитуру.

## Ступенчатые сверла WPW Решение без компромиссов теперь доступно

Используйте таблицу ниже для подбора диаметра самореза и ступенчатых сверел.

Сверло Арт.	Пилотное отверстие D mm	Отверстие под резьбу D1 mm	Общая длина L mm	Длина ступени L1 mm	Диаметр самореза		Номер самореза	
					S/W	H/W	S/W	H/W
DR28040	4	2.8	75	19	4MM	3.5MM	#8	#6
DR32044	4.4	3.17	80	22	4.5MM	4MM	#9-10	#8
DR35050	5	3.5	86	25	5MM	4.5MM	#12	#9-10

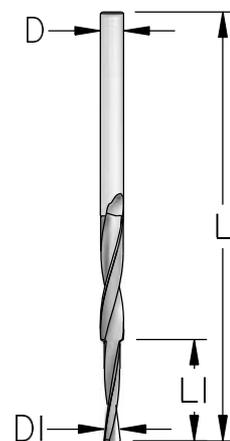

SW= Мягкое дерево

HW= Твердое дерево

Для мягкой породы дерева просверлите меньшее отверстие на 10-15%

**СОВЕТ:** По возможности используйте сверлильный станок

## Твердосплавные зенковки со ступенчатым сверлом

### АСО...М


Зенковки оправки WPW со ступенчатым сверлом

Сверло ступенчатое HSS в комплекте.

Круглый хвостовик



Арт.	D1	D2	D	L	d
АС04005М	4	2.8	10	44	8
АС04405М	4.4	3.2	11.1	44	8
АС05007М	5	3.5	12	51	9.5

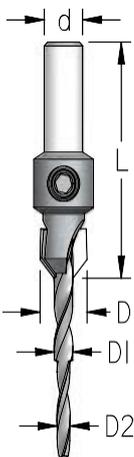


### АФР...М


Зенковки оправки WPW ограничителем БЕЗ ЦАРАПИН

Хвостовик подходит для системы Festool®

CENTROTEC® Сверло ступенчатое HSS в комплекте.



Арт.	D1	D2	D	L
АФР4004М	4	2.8	9.5	74
АФР4404М	4.4	3.2	12.0	77
АФР5004М	5.0	3.5	12.7	77

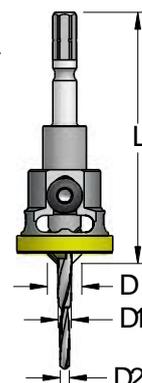




## Твердосплавные зенковки с ограничителем глубины

**Чистая поверхность и контроль глубины. Без царапин! Без поджгов!**


Уникальные регулируемые ограничители для быстрой и точной установки глубины зенкования. Удобная и простая конструкция с шестигранными винтами для установки глубины зенкования и замены сверла. Независимая регулировка глубины сверления и глубины зенкования. В комплект входит специальный двусторонний шестигранный ключ.

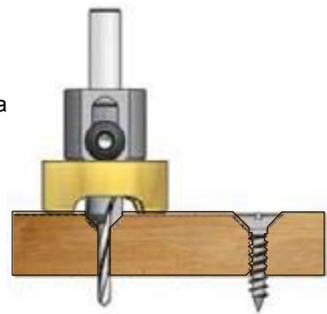

### AQP

**Зенковки конические с ограничителем БЕЗ ЦАРАПИН**

Быстросменный хвостовик шестигранный 6,3 мм.  
Кольцо из антифрикционного пластика.  
Сверло HSS универсальная спираль в комплекте.

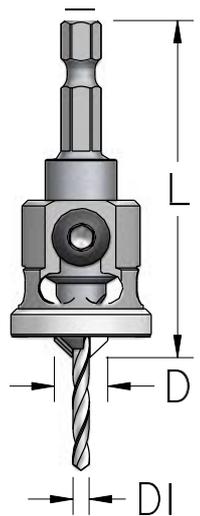


Арт.	D1	D	L
AQP2004S	2	9.5	60
AQP2404S	2.4	9.5	60
AQP2504S	2.5	9.5	60
AQP2804SC	2.8	9.5	60
AQP3004SC	3	9.5	60
AQP3204SC	3.2	9.5	60
AQP3604SC	3.6	12.7	60
AQP4004SC	4	9.5	60
AQP4014SC	4	10	60
AQP4504SC	4.5	9.5	70
AQP5004SC	5	12.7	70
AQP6004SC	6	12.7	70

### ATP

**Зенковки оправки с ограничителем БЕЗ ЦАРАПИН**

Круглый хвостовик. Кольцо из антифрикционного пластика.  
Сверло HSS с плавной спиралью в комплекте.

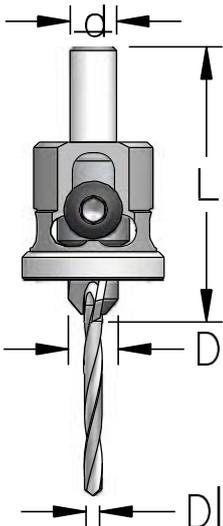


Арт.	D1	D	L	d
ATP2405D	2.4	8.5	49	8
ATP3005D	3	10	49	8
ATP3205D	3.2	9.5	49	8
ATP3285D	3.2	12.7	51	8
ATP3505D	3.5	10	49	8
ATP3605D	3.6	10	49	8
ATP4005D	4	10	50	8
ATP4405D	4.4	11.1	50	8
ATP4807D	4.8	11.1	51	9.5
ATP4817D	4.8	12.7	51	9.5
ATP5005D	5	10	50	8
ATP5007D	5	12	51	9.5
ATP6007D	6	12.7	51	9.5

### ABB

**Зенковки профессиональные с ограничителем БЕЗ ВМЯТИН**

Быстросменный хвостовик шестигранный 6,3 мм. Ограничитель глубины с подшипником.  
Для непрерывной работы.  
Эффективный отвод стружки. Сверло HSS универсальная спираль в комплекте.

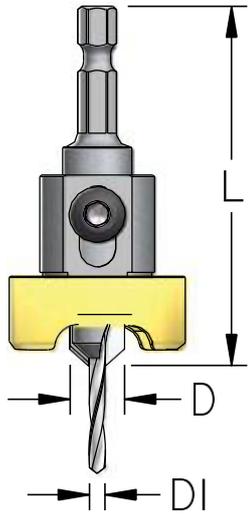


Арт.	D1	D	L
ABB2404S	2.4	9.5	66
ABB3204S	3.2	9.5	66
ABB3604S	3.6	9.5	66
ABB4004SC	4	9.5	66
ABB4404SC	4.4	12.7	70
ABB4504SC	4.5	12	70

### ALB

**Зенковки профессиональные с ограничителем БЕЗ ВМЯТИН**

Хвостовик круглый. Ограничитель глубины с подшипником. Для непрерывной работы.  
Эффективный отвод стружки.  
Сверло HSS универсальная спираль в комплекте.

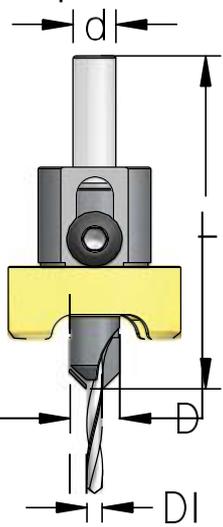

Арт.	D1	D	L	d
ALB5017SC	5	10	65	10
ALB5007SC	5	12	65	10
ALB6007SC	6	12.7	65	10

# Адаптеры зенковок WPW с регулировкой глубины

**Подходят для большинства зенковок WPW с круглым 8-мм хвостовиком**  
**Без царапин! Без поджогов!**

Превращает стандартные зенковки WPW (8 мм хвостовик), в уникальные инструменты с регулируемыми стопорными кольцами. Удобная конструкция позволяет легко контролировать глубину сверления и менять сверло.



## ТАСР806

Адаптер с фторопластовым ограничителем глубины сверления. Специальный двусторонний шестигранный ключ входит в комплект.

## ТАСВ806

Адаптер с профессиональным ограничителем глубины с подшипником 28мм. Хвостовик 9,5 мм. Специальный двусторонний шестигранный ключ входит в комплект.

## ТАСВМ806

Адаптер для зенковок WPW с микро регулировкой глубины и профессиональным ограничителем с подшипником.

Резбовая конструкция позволяет точно настроить глубину зенкования. Точность 0,1 мм. Круглый хвостовик 9,5 мм

## ТАФ080Н


Адаптер с гибридным хвостовиком - два в одном

Festool® CENTROTEC® + быстросменный хвостовик HEX 6,3 мм.

Наконец, вы можете использовать профессиональные твердосплавные зенковки WPW с круглым хвостовиком 8 мм в шуруповерте и в инструменте Festool®.

## АС0...D

Зенковки твердосплавные со сверлом плавная спираль Круглый хвостовик. Сверло HSS плавная спираль в комплекте.


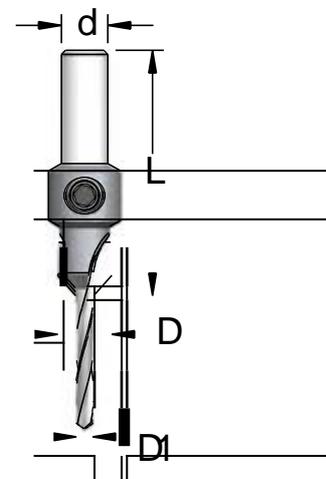


Арт.	D1	D	L	d
AC02005D	2.0	8.5	44	8
AC02405D	2.4	8.5	44	8
AC02805D	2.8	9.5	44	8
AC03005D	3	10	44	8
AC03215D	3.2	8	44	8
AC03205D	3.2	9.5	44	8
AC03285D	3.2	12.7	49	8
AC03605D	3.6	10	44	8
AC04005D	4	10	44	8
AC04405D	4.4	11.1	44	8

Арт.	D1	D	L	d
AC04807D	4.8	11.1	51	9.5
AC04817D	4.8	12.7	49	9.5
AC05007D	5	12	51	9.5
AC05607D	5.6	12	47	9.5
AC06007D	6	12.7	47	9.5
AC06307D	6.3	13.5	47	10

## АС0...T



Зенковки твердосплавные с коническим сверлом Круглый хвостовик. Сверло HSS конусное в комплекте.

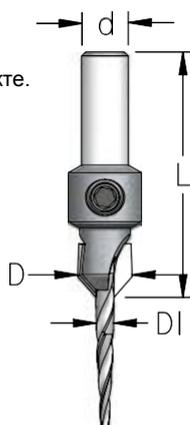

Арт.	D1	D	L	d
AC03205T	3.2	9.5	44	8
AC03605T	3.6	10	44	8
AC04005T	4	10	44	8
AC04405T	4.4	11.1	44	8
AC04807T	4.8	11.1	51	9.5

## АС4...D

Зенковки прямые (ровное дно) со сверлом плавная спираль Круглый хвостовик. Сверло HSS плавная спираль в комплекте.

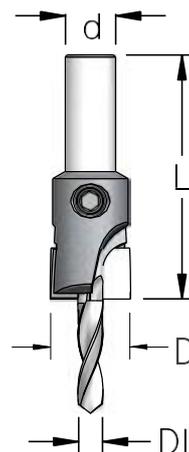


Арт.	D1	D	L	d
AC43205D	3.2	9.5	48	8
AC44005D	4	10	48	8
AC44405D	4.4	10	48	8
AC44817D	4.8	12.7	48	9.5
AC45617D	5.6	12.7	48	9.5
AC46017D	6	12.7	48	9.5
AC46317D	6.3	12.7	48	9.5

## AC2/AS2

### Carbide Tipped Countersink - Shankless

Slow Spiral  
HSSdrill included.

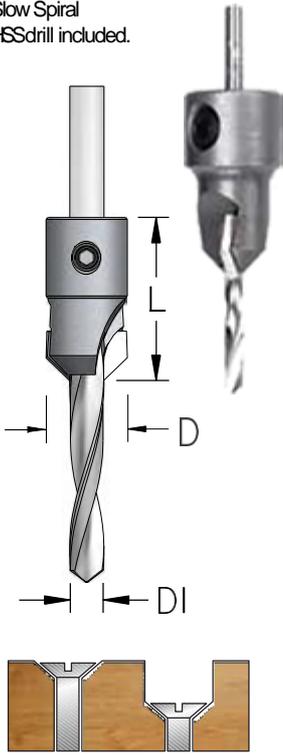


Tool No.	D1	D	L
AS22800D	2.8	9.5	28
AS23000D	3	9.5	28
AS23200D	3.2	9.5	28
AC21232D	3.2	12.7	32
AS23500D	3.5	9.5	28
AS23600D	3.6	9.5	28
AS24000D	4	9.5	30
AC21240D	4	12.7	32
AS24400D	4.4	9.5	30
AS24810D	4.8	12.7	30
AC21648D	4.8	16	32
AS25610D	5.6	12.7	30
AC21656D	5.6	16	32
AS26310D	6.3	12.7	30
AC26320D	6.3	16	32
AC27020D	7	16	39
AC28020D	8	16	39
AC28030D	8	19	39
AC29530D	9.5	19	39
AC22595D	9.5	25.4	52
AC22811D	11.1	28.6	52

## AC4

### Carbide Tipped Counterbore - Shankless

Slow Spiral HSSdrill included.

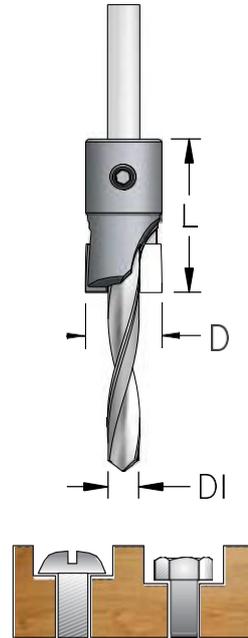

Tool No.	D1	D	L
AC49540D	4	9.5	32
AC49548D	4.8	9.5	32
AC41248D	4.8	12.7	32
AC41263D	6.3	12.7	32
AC46320D	6.3	16	32
AC41963D	6.3	19	38
AC42263D	6.3	22.2	38
AC47020D	7	16	38
AC48020D	8	16	38
AC48030D	8	19	38
AC49530D	9.5	19	38
AC42595D	9.5	25.4	51
AC42512D	12.7	25.4	51
AC42812D	12.7	28.6	51



## ECONOMICAL COUNTERSINKS FOR EVERY CRAFTSMAN AND DIY

### HCP

#### TCT Countersink with Low friction Depth-Stop

Antifriction polymer Collar, HSSdrill included. Round shank

Tool No.	D	D1	D	L
HCP2505S	9.0	2.5	47	8
HCP3205SC	9.5	3.2	47	8
HCP4005SC	10.5	4.0	47	8
HCP4505SC	11.0	4.5	47	8


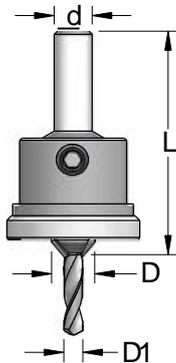


### HS

#### HS Countersink

HSSdrill included. Quick-Change 1/4" (6.3mm) HEXshank

Tool No.	D1	D	L
HS02504S	2.5	9.5	51
HS03004S	3	9.5	51
HS03204S	3.2	9.5	51
HS03504S	3.5	9.5	51
HS04004S	4	9.5	51

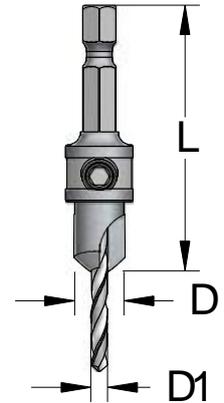


## MULTI-DIAMETER TCT COUNTERSINKS & COUNTERBORES

### Carbide tipped. Shankless, for assembling on drills.

Onetool fits over drills of different sizes, for a quick and easy change on the job. Rather than have a set of tools that may not be the size you need, you could replace them with one adjustable tool.

Note: Counterbore and Countersink Dia. (D) depends on drill Dia. (D1)

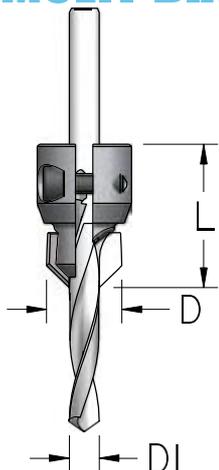


### ACM

#### Multi-Diameter Countersink

Slow Spiral HSSdrill included.

Tool No.	D1	D	L
ACM3070	3-7.2	12-16	29
ACM6010D	6-10	15.5-19.5	34




### AC4M

#### Multi-Diameter Counterbore

Slow Spiral HSSdrill included.

Tool No.	D1	D	L
AC4M370D	3-7.2	11.5-15.5	28
AC4M610D	6-10	21-25	33


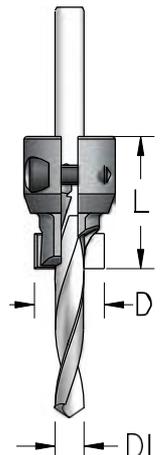


## ASO...S

### Carbide Tipped Countersinks

HSSdrill included. Quick-Change 1/4" (6.3mm) HEXshank.

Tool No.	D1	D	L
AS02004S	2	9.5	54
AS02404S	2.4	9.5	54
AS02504S	2.5	9.5	54
AS02804S	2.8	9.5	54
AS03004S	3.0	9.5	54
AS03204S	3.2	9.5	54
AS03504S	3.5	9.5	54
AS03604S	3.6	12.7	54
AS04004S	4	9.5	54
AS04804S	4.8	12.7	70
AS05004S	5	12.7	70
AS06004S	6	12.7	70

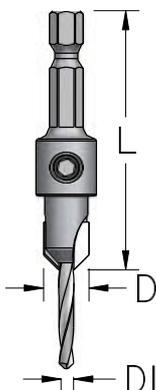


## AF

### Carbide Tipped Countersinks

Compatible with Festool® CENTROTEC® system  
Slow Spiral HSSdrill included

Tool No.	D1	D	L
AF02404D	2.4	9.5	74
AF02804D	2.8	9.5	74
AF03204D	3.2	9.5	74
AF03604D	3.6	9.5	74
AF04004D	4.0	9.5	74
AF04404D	4.4	12.0	77
AF05004D	5.0	12.7	77

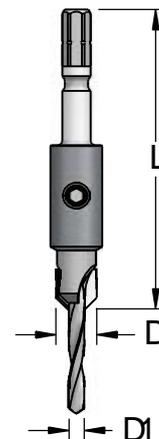


## ASO...T

### TCT Countersink with Taper Point Drill

Quick-Change 1/4" (6.3mm) HEXshank.

Tool No.	D1	D	L
AS02404T	2.4	9.5	54
AS03204T	3.2	9.5	54
AS03604T	3.6	12.7	54
AS04004T	4	9.5	54
AS04804T	4.8	12.7	70

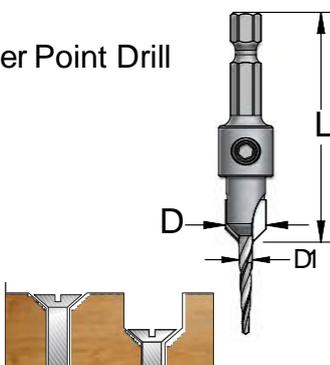


## AS4...D

### Carbide Tipped Counterbore

Slow Spiral HSSdrill included.  
Quick-Change 1/4" (6.3mm) HEXshank.

Tool No.	D1	D	L
AS44004D	4	9.5	55
AS44804D	4.8	9.5	55
AS44814D	4.8	12.7	70
AS45014D	5	14	70
AS46014D	6	15	70
AS46304D	6.3	12.7	70

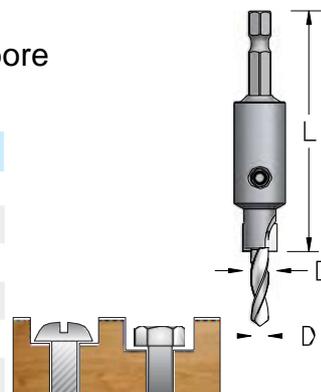

## 3 STEPS DRILL BITS

For Connecting Screws (Confirmat, Directa etc.).  
Performs 3 tasks in one operation:  
Pilot hole, Clearance hole and Countersink.




### ACD

#### 3 Steps Drill for laminated chipboard

Countersink \*DHN treated. Slow Spiral HSSdrill included. Round shank.

Tool No.	D1	D2	D	B	L	d
ACD0507D	3.5	5	8	15	53	10
ACD0657D	4.4	6.5	9.6	9.5	50	10
ACD0707KD	5	7	10	10	50	10
ACD0707D	5	7	10	19	59	10

\*DHN- Advanced surface treatment for extended life

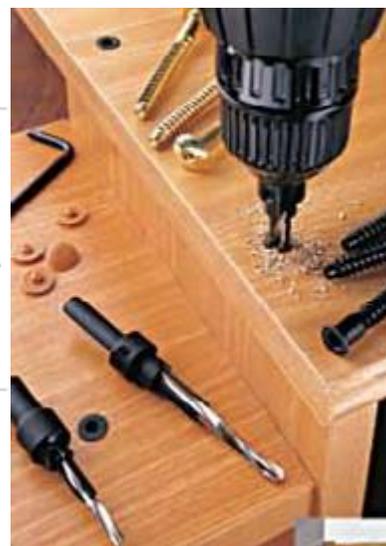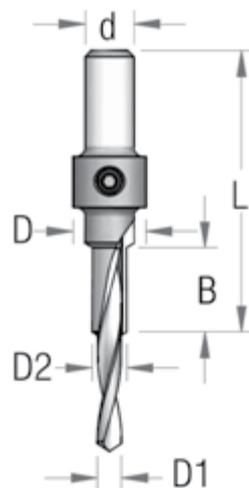


### ACD

#### 3 Steps Drill for MDF and other materials

HS Shankless countersink.  
Stepped HSS drill included.  
Replacement drill: DR50070

Tool No.	D1	D2	D	B	L
ACD0700D	5	7	10	5-25	30

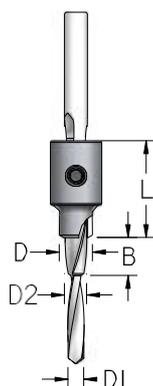


### ASD

#### 3 Steps Drill for laminated chipboard

Countersink \*DHN treated.  
Slow Spiral HSSdrill included.  
Quick-Change 1/4" (6.3mm) HEXShank.

Tool No.	D1	D2	D	B	L
ASD0504D	3.5	5	8	15	60
ASD0704D	5	7	10	19	79

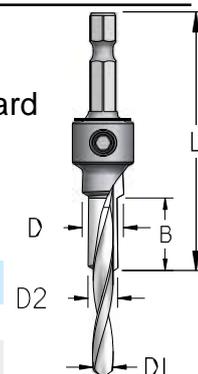



## CYLINDER - HINGE BORING BITS


Carbide tipped with a centering point.  
Typically used for recessing circular door hinges. For Blind holes and Through holes.

### MP

#### Professional TCT Boring Bits

2 straight cutting edges and 2 spurs.  
Round shank.

Tool No.	D	L	d
MP15007	15	85	10
MP19007	19	85	10
MP20007	20	85	10
MP22007	22	85	10
MP25007	25	85	10
MP26007	26	85	10
MP30007	30	85	10
MP35007	35	85	10
MP38007	38	85	10
MP40007	40	85	10
MP45007	45	85	10
MP50007	50	85	10

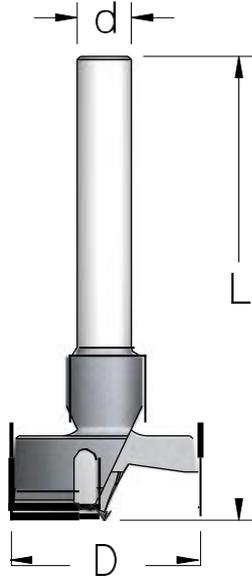


### HMP

#### Economy TCT Boring Bits

2 straight cutting edges. No spurs.  
Round shank.  
For best results use drill press.

Tool No.	D	L	d
HMP2005	20	57	8
HMP2505	25	57	8
HMP2605	26	57	8
HMP3005	30	57	8
HMP3505	35	57	8

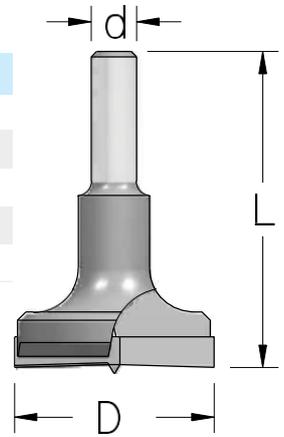


### HMPS

#### Economy TCT Boring Bits

2 straight cutting edges. No spurs.  
Quick-Change 1/4" (6.3mm) HEX shank.  
For best results use drill press.

Tool No.	D	L
HMPS154	15	55
HMPS204	20	55
HMPS254	25	55
HMPS264	26	55
HMPS304	30	55
HMPS354	35	55

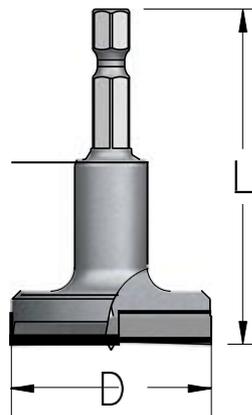


### HMPT

#### TCT Boring Bits

2 straight cutting edges.  
Special design for better results.  
Quick-Change 1/4" (6.3mm) HEX shank.

Tool No.	D	L
HMPT154	15	58
HMPT264	26	58
HMPT354	35	58
HMPT404	40	58

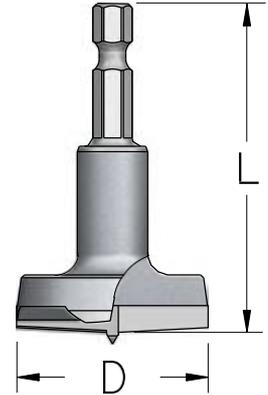

## BORING BITS WITH DEPTH-STOP


### HMPAL

Unique adjustable Aluminum depth-stop allows control of depth of blind holes when recessing circular door hinges.

**Prevents from damaging the door.**  
**Simple depth control.**



#### HMPAL354

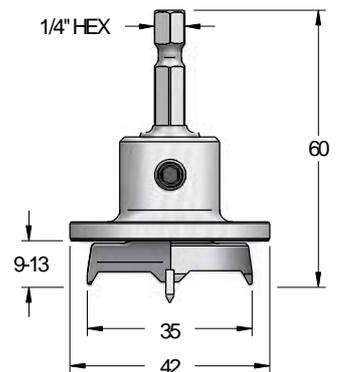




## MNS

### Plug Cutters - Self Ejecting

Heat-treated and **DH-N**\* treated.  
One Flute.  
For best results use drill press.  
Quick-Change 1/4" (6.3mm)  
HEXShank.

Tool No.	D	Hmax	L
MNS0804	8	19	56
MNS0954	9.5	19	62
MNS1004	10	19	62
MNS1204	12	19	62
MNS1274	12.7	19	62
MNS1504	15	19	63
MNS1604	16	19	63

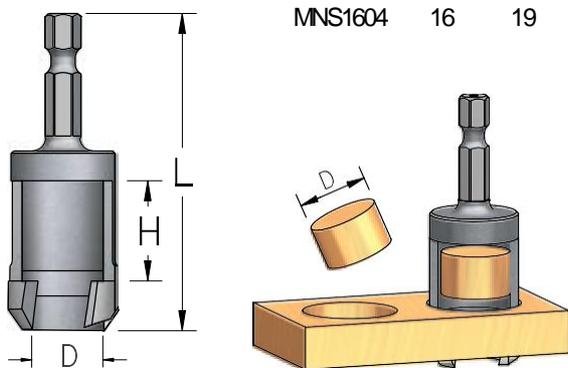

\*DH-N- Advanced surface treatment for extended life


## MN

### Plug Cutters - Self Ejecting

Heat-treated and **DH-N**\* treated.  
One Flute.  
For best results use drill press.

Tool No.	D	Hmax	L	d
MN09505	9.5	19	61	8
MN10005	10	19	61	8
MN12005	12	19	61	8
MN12705	12.7	19	61	8
MN16007	16	19	75	10
MN19007	19	19	75	10
MNL0955	9.5	50	94	8

Extra long design - up to 50mm length of plugs


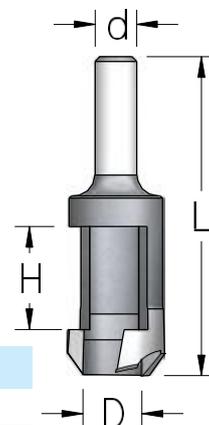


## MNT

### Carbide Tipped Plug Cutters - 2 flutes

Drill press must be used.  
For making plugs up to 16mm Long.

Tool No.	D	Hmax	L	
d=6mm d=1/4"	mm	mm	mm	
MNT0953	MNT0954	9.5	16	58
MNT1003	MNT1004	10	16	58
MNT1203	MNT1204	12	16	58
d=12mm d=1/2"	mm	mm	mm	
MNT0952	MNT0958	9.5	16	65
MNT1002	MNT1008	10	16	65
MNT1272	MNT1278	12.7	16	65
MNT1602	MNT1608	16	16	65
MNT1902	MNT1908	19	16	65

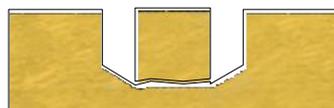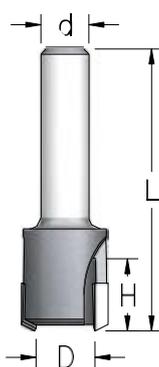


## MNK

### Tapered TCT Plug Cutters - 2 flutes

A drill press must be used. For making tapered plugs up to 16mm long.  
Ensures a tight fit - no gap around the plug.

This solves the problem of irregular holes or plugs as a result of runout in the drill press etc. You just tap a plug into a hole until you meet resistance, then cut off the excess.


Tool No.	D1	D2	D	Hmax	L	
d=12mm d=1/2"	mm	mm	mm	mm	mm	
MNK1302	MNK1308	12	13	27.5	16	72
MNK1602	MNK1608	15.2	16.2	29.5	16	71
MNK2002	MNK2008	18.3	19.5	33	16	71

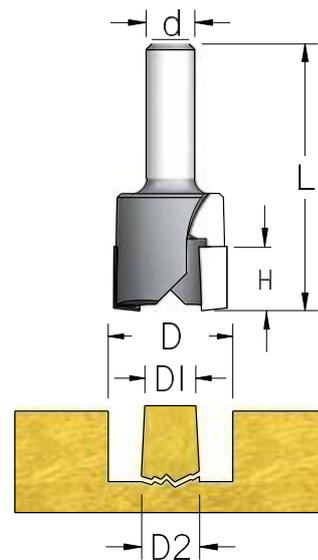

# COUNTERSINK & PLUG CUTTER SET

For decorative concealing of screw heads with wooden plugs.  
The sets include TCT countersink bit and a matching plug cutter.



After driving the screw, dip the wooden plug in glue. Match up the grain orientation.  
Then insert the plug and tap it down with a hammer.  
Lastly, trim the plug flush, and use a sanding block to complete the job.

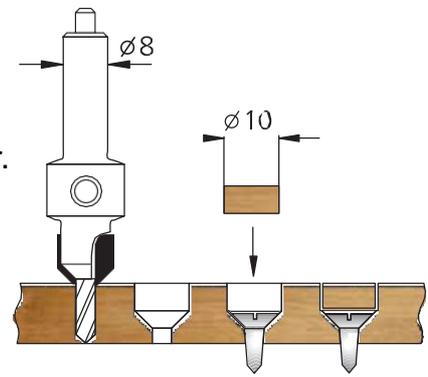

## PL

### Countersink & Plug Set

Includes TCT countersink bits with different drill diameters and a 10mm plug cutter (MN10005), which fits with all countersinks. Round shanks 8mm.

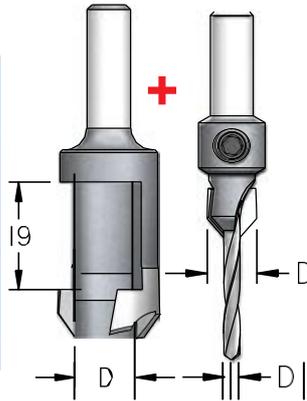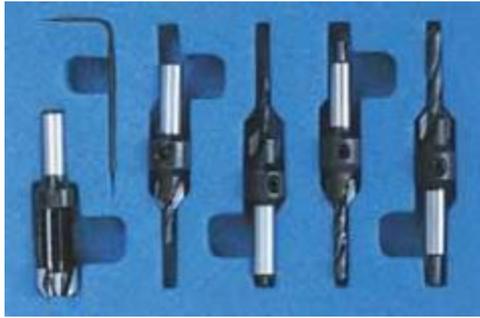

Set No.	Drill Dia. (D1)	Plug Dia (D)	Replacement Countersink
---------	-----------------	--------------	-------------------------

#### One Countersink + Plug Cutter

PL10305	3.0	10	AC10305S
PL10325	3.2	10	AC10325S
PL10355	3.5	10	AC10355S
PL10365	3.6	10	AC10365S
PL10405	4.0	10	AC10405S
PL10445	4.4	10	AC10445S
PL10505	5.0	10	AC10505S

#### 4 Countersinks + Plug Cutter


PL40005	3.0, 3.5, 4.0, 5.0	10	
PL41005	3.2, 3.6, 4.0, 4.4	10	

## PLP

### Countersink & Stop Plug Set

Includes one TCT countersink bit with Depth-Stop and a matching plug cutter.  
Unique adjustable Low Friction Depth-Stop for clean surface.  
Quick-Change 1/4" (6.3mm) HEX Shanks.

Set No.	Drill Dia. (D1)	Plug Dia (D)
One Countersink + Plug Cutter		
PLP1254	2.5	8
PLP1354	3.5	10
PLP1454	4.5	12
PLP1604	6.0	15

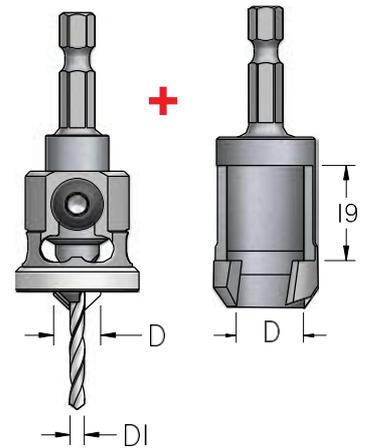

# COUNTERSINK COMBINATION SETS

## AQPS

### Countersink & Stop 3pcs Set

Includes 3 TCT countersinks and one Low friction Depth-Stop which fits all 3 countersinks.  
Quick-Change 1/4" (6.3mm) HEX Shanks.



Set No.	Contains
	AQ02504S - 2.5mm countersink
AQPS014	AQP3004SC - 3.0mm countersink & stop
	AQ04004SC - 4.0mm countersink

## QCS

### Countersink & Plug 7pcs Set

Includes 3 TCT countersinks, a matching plug cutter, Quick-Change Chuck and screwdriver bits.  
Quick-Change 1/4" (6.3mm) HEX Shanks.



Set No.	Contains
	AS02504S - 2.5mm countersink
	AS03004S - 3.0mm countersink
	AS04004S - 4.0mm countersink
QCS1104	MNS0954 - 9.5mm Plug Cutters
	QCH6306 - Quick-Change Chuck
	3 Power screwdriver bits

# TCT GLASS & TILE DRILLS


For use on glass, porcelain, tile and mirrors. When drilling glass, apply lubricant (water or light oil).

## HMZ...0

Glass & Tile Drills

Round shank.

Tool No.	D	L
HMZ0300	3	58
HMZ0400	4	59
HMZ0500	5	62
HMZ0600	6	70
HMZ0800	8	81
HMZ1000	10	93
HMZ1200	12	105
HMZ1300	13	105

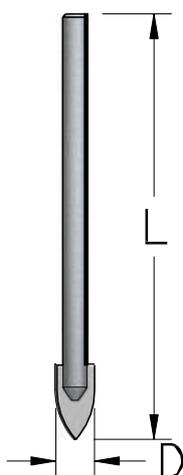


## HMZ...4

Glass & Tile Drills

Quick-Change 1/4" (6.3mm) HEXShanks.

Tool No.	D	L
HMZ0304	3	58
HMZ0404	4	59
HMZ0504	5	62
HMZ0604	6	70
HMZ0704	7	80
HMZ0804	8	81
HMZ1004	10	93
HMZ1204	12	105
HMZ1304	13	105

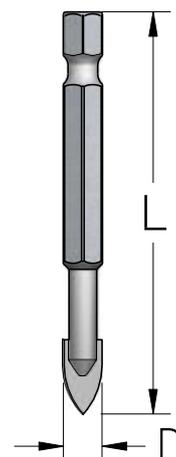


## TDS

Drill Adapters

Converts all standard drill bits into Quick-Change tools.

Quick-Change 1/4" (6.3mm) HEXShanks.

Tool No.	D	L
TDS0200S	2.0	42
TDS0250S	2.5	42
TDS0280S	2.8	42
TDS0300S	3.0	42
TDS0320S	3.2	42
TDS0350S	3.5	42
TDS0360S	3.6	42
TDS0400S	4.0	42
TDS0440S	4.4	42
TDS0480S	4.8	42
TDS0500S	5.0	42
TDS0600S	6.0	51
TDS0630S	6.3	51

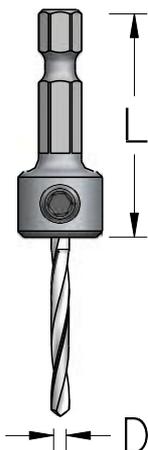

## QC

Quick - Change Chuck

For 1/4" (6.3mm) hexagonal shanks.

Converts all standard drill chucks into Quick Change attachment.

Insert this chuck into a power drill chuck and tighten it using the chuck key.

Now you can change tools instantly by just pulling the sleeve.

**No chuck key needed anymore!**

## QCL6306

Professional chuck



## QCH6306

DIY chuck




# REPLACEMENT DEPTH STOPPERS

## TATP

Low Friction Depth Stopper

With replaceable polymer ring.

Tool No.	D1	D	L
TATP130	13	25	25
TATP150	15	28	25

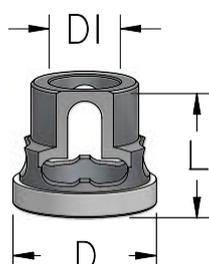


## TAB

Non Friction Depth Stopper

Revolving metal body.  
Includes a thrust ball bearing.


Tool No.	D1	D	L
TAB1300	13	32	32.5
TAB1500	15	32	32.5

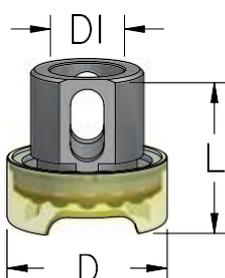

## BTAT

Polymer Collar Replacement kit

- 1 Stopper body
- 2 Polymerring
- 3 Flange

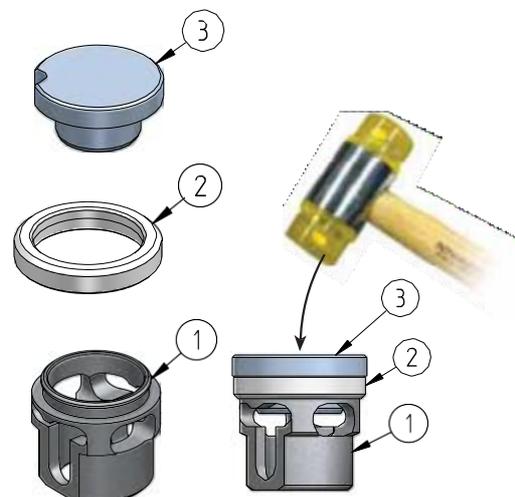

Tool No.	Contains
BTAT0255	Flange plus 5 Polymer rings for TATP130
BTAT0285	Flange plus 5 Polymer rings for TATP150




## DR

### HSS Drills

DIN338. M2 Fully ground.

Tool No.	D	L
DR02000	2.0	49
DR02400	2.4	57
DR02500	2.5	57
DR02800	2.8	61
DR03000	3.0	61
DR03200	3.2	65
DR03500	3.5	70
DR03600	3.6	70
DR04000	4.0	75
DR04400	4.4	80
DR04500	4.5	80
DR04800	4.8	86
DR05000	5.0	86
DR05600	5.6	93
DR06000	6.0	93
DR06300	6.3	101
DR07000	7.0	109

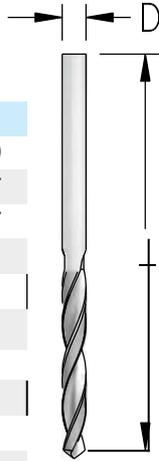


## DRK

### HSS Short Drills

DIN 1897.  
M2 Fully ground.

Tool No.	D	L
DRK0280	2.8	46
DRK0300	3.0	46
DRK0320	3.2	49
DRK0350	3.5	52
DRK0360	3.6	52
DRK0400	4.0	55
DRK0440	4.4	58
DRK0450	4.5	58
DRK0480	4.8	62
DRK0500	5.0	62
DRK0600	6.0	66

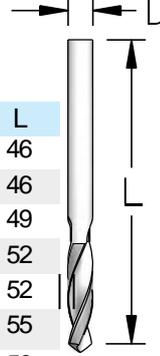


## DRT

### HSS Taper Point Drills

M2 Fully ground.

Tool No.	D	L
DRT0200	2.0	51
DRT0240	2.4	57
DRT0280	2.8	68
DRT0320	3.2	70
DRT0360	3.6	73
DRT0400	4.0	80
DRT0440	4.4	83
DRT0480	4.8	89
DRT0500	5.0	89
DRT0560	5.6	95
DRT0600	6.0	98
DRT0630	6.3	102

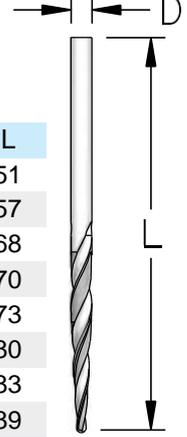


## DRS

### HSS Slow Spiral Drills

DIN338. M2 Fully ground.

Tool No.	D	L
DRS0200	2.0	49
DRS0240	2.4	57
DRS0280	2.8	61
DRS0300	3.0	61
DRS0320	3.2	65
DRS0350	3.5	70
DRS0360	3.6	70
DRS0400	4.0	75
DRS0440	4.4	80
DRS0480	4.8	86
DRS0500	5.0	86
DRS0560	5.6	93
DRS0600	6.0	93
DRS0630	6.3	101
DRS0800	8.0	117
DRS0900	9.0	125
DRS0950	9.5	125
DRS1110	11.1	142
DRS1270	12.7	150

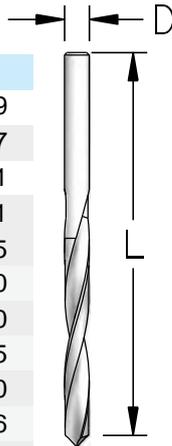


## DR

### HSS Stepped Drills

M2 Fully ground.

Unique solution for one drilling operation of:  
Pilot hole + Clearance hole.

Tool No.	DI	D	L	LI
DR28040	2.8	4.0	75	19
DR32044	3.2	4.4	80	22
DR35050	3.5	5.0	86	25
DR50070	5.0	7.1	109	25

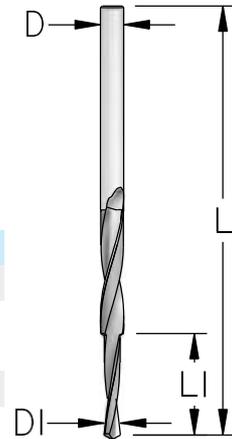

## TATM


### Adjustable Drill Depth-Stops

Can be clamped onto any drill, either on the flute or on the shank.

An innovative and universal solution to the problem of drilling holes to an accurate depth.

Special design to minimize any marks on the surface being drilled.

Tool No.	D	L
TATM3070	3-7	14
TATM6100	6-10	20

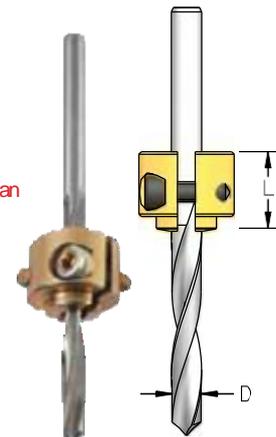

# INDUSTRIAL DRILLING

WPW offers Dowel Drills, countersinks, professional hinge boring bits and accessories for Multi Drilling Machines, CNC machines and other machines with "Combi" system chuck.



1972



1989



2015

Year Developed

## TOOLS FOR BORING MACHINES

Drills and accessories for Multi Drilling Machines, CNC/ Point to Point boring machines and other machines with "Combi" system chuck. The shanks have 10mm Diameter and a flat area on one side for tightening it inside the chuck. A fine tuning of the drill length is possible, using the length adjustment screw which is inserted in the back of the shank.  
Length adjustment set screw - BR50100 (M5 x 10).

### DDB


#### Dowel Drills for Blind Holes

Carbide Tipped

Fits 10 mm combi chucks right hand and left hand rotation.

Tool No.		D	L	L1	d
Right	Left	mm	mm	mm	mm
DDB04577	DDB04577L	4	57.5	27	10x27
DDB05577	DDB05577L	5	57.5	27	10x27
DDB06577	DDB06577L	6	57.5	27	10x27
DDB07577	DDB07577L	7	57.5	27	10x27
DDB08577	DDB08577L	8	57.5	27	10x27
DDB10577	DDB10577L	10	57.5	27	10x27
DDB12577	DDB12577L	12	57.5	27	10x27
DDB04707	DDB04707L	4	70	35	10x30
DDB05707	DDB05707L	5	70	35	10x30
DDB06707	DDB06707L	6	70	35	10x30
DDB07707	DDB07707L	7	70	35	10x30
DDB08707	DDB08707L	8	70	35	10x30
DDB10707	DDB10707L	10	70	35	10x30
DDB12707	DDB12707L	12	70	35	10x30

Tool No.		D	L	L1	d
Right	Left	mm	mm	mm	mm
DDB05777	DDB05777L	5	77	44	10x30
DDB06777	DDB06777L	6	77	44	10x30
DDB07777	DDB07777L	7	77	44	10x30
DDB08777	DDB08777L	8	77	44	10x30
DDB10777	DDB10777L	10	77	44	10x30
DDB12777	DDB12777L	12	77	44	10x30

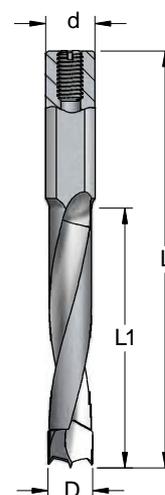

### DDT


#### Through Hole Drills

Carbide Tipped

Fits 10 mm combi chucks right hand and left hand rotation.

Tool No.		D	L	L1	d
Right	Left	mm	mm	mm	mm
DDT05577	DDT05577L	5	57.5	25	10x25
DDT06577	DDT06577L	6	57.5	25	10x25
DDT07577	DDT07577L	7	57.5	25	10x25
DDT08577	DDT08577L	8	57.5	25	10x25
DDT05707	DDT05707L	5	70	40	10x25
DDT06707	DDT06707L	6	70	40	10x25
DDT07707	DDT07707L	7	70	40	10x25
DDT08707	DDT08707L	8	70	40	10x25
DDT10707	DDT10707L	10	70	40	10x25
DDT12707	DDT12707L	12	70	40	10x25

Tool No.		D	L	L1	d
Right	Left	mm	mm	mm	mm
DDT05777	DDT05777L	5	77	45	10x25
DDT06777	DDT06777L	6	77	45	10x25
DDT07777	DDT07777L	7	77	45	10x25
DDT08777	DDT08777L	8	77	45	10x25
DDT10777	DDT10777L	10	77	45	10x25

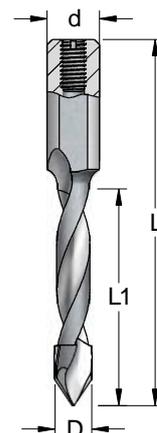




## MPK

### Cylinder-Hinge Boring Bits - Combi System

Carbide tipped with a centering point, 2 straight cutting edges and 2 nicking teeth.  
Fits 10 mm combi chucks right hand and left hand rotation.

Tool No.		D	L	d
Right	Left	mm	mm	m m
MPK1507	MPK1507L	15	56.5	10x26
MPK1607	MPK1607L	16	56.5	10x26
MPK1807	MPK1807L	18	56.5	10x26
MPK2007	MPK2007L	20	56.5	10x26
MPK2507	MPK2507L	25	56.5	10x26
MPK2607	MPK2607L	26	56.5	10x26
MPK3007	MPK3007L	30	56.5	10x26
MPK3507	MPK3507L	35	56.5	10x26
MPK3807	MPK3807L	38	56.5	10x26
MPK4007	MPK4007L	40	56.5	10x26

Tool No.		D	L	d
Right	Left	mm	mm	m m
MPK1517	MPK1517L	15	69	10x26
MPK2017	MPK2017L	20	69	10x26
MPK2517	MPK2517L	25	69	10x26
MPK3517	MPK3517L	35	69	10x26

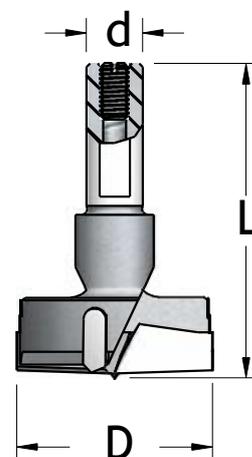


## Combi Chuck Accessories

### TK

#### Shank Drill Bushings

Tool No.	D	L	d
	mm	mm	mm
TK10020	2.0	23	10
TK10025	2.5	23	10
TK10030	3.0	23	10
TK10032	3.17 (1/8")	23	10
TK10035	3.5	23	10
TK10040	4.0	23	10
TK10045	4.5	23	10
TK10050	5.0	23	10
TK10055	5.5	23	10
TK10060	6.0	23	10
TK10070	7.0	23	10
TK10080	8.0	23	10

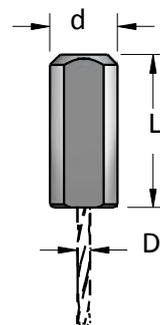


### TA

#### Combi Chuck Adapters for Drills

Drill not included.

Tool No.	D	L	d
	mm	mm	mm
TA10020	2.0	38	10x22
TA10025	2.5	38	10x22
TA10030	3.0	38	10x22
TA10032	3.17 (1/8")	38	10x22
TA10035	3.5	38	10x22
TA10040	4.0	38	10x22
TA10050	5.0	38	10x22
TA10063	6.35 (1/4")	38	10x22

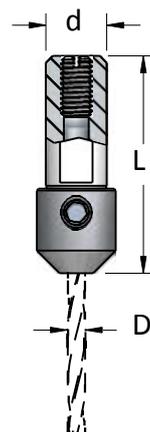


## TA

### Adapters for "Combi" Systemdrills

For CNC and Router machines

Allows using combi system drills, such as dowel drills, boring bits etc. in wide range of applications.

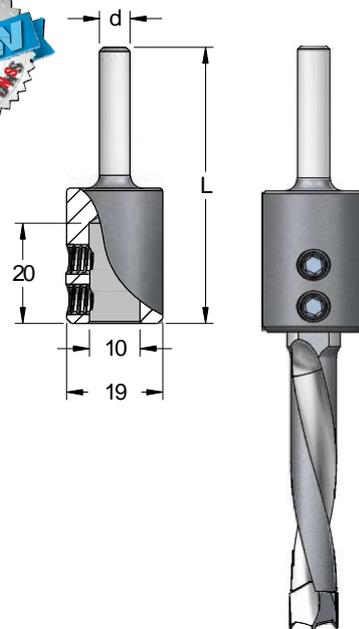

Tool No.	d mm	L mm
TA10003	6	55
TA10004	6.35 (1/4")	55
TA10005	8	57
TA10007	10	55
TA10002	12	62
TA10008	12.7 (1/2")	62




## TM

### Boring Machine Chucks - Combi System

For 10mm Shank Boring Bits

Right hand and left hand rotation.

Tool No.		d	D mm	$\alpha$ degrees	B mm	L mm	For Machines
Right	Left						
TM08101R	TM08101L	M8	-	-	15	40	NOTIMEYER
TM10103R	TM10103L	M10	-	-	15	40	AYEN, TORWEGGE, HOLZMA...
TM08104R	TM08104L	M8	9	-	16	41	NOTIMEYER
TM08114R	TM08114L	M8	9	-	16	52	NOTIMEYER
TM10105R	TM10105L	M10	11	-	16	41	HOLZMA, S.C.M.I., MORBIDELLI, BIESSE, TORWEGGE...
TM08106R	TM08106L	M10	-	20°48'	12	51	BILEK
TM10107R	TM10107L	M10	-	-	-	46	SCHER



2 Locking screws - BR50050 (M5 x 5), Allen key - KEY025 (2.5mm)

## AC3

### Countersinks for Dowel Drills

Carbide Tipped

Right hand and left hand rotation.

Drills not included.

Tool No.		D1	D	L
Right	Left	mm	mm	mm

Designed to be assembled on the drill flute  
For individual drill Diameters


AC3040R	AC3040L	4	15.5	18
AC3050R	AC3050L	5	16	18
AC3060R	AC3060L	6	16	18
AC3070R	AC3070L	7	16	18
AC3080R	AC3080L	8	18	18
AC3090R	AC3090L	9	18	18
AC3100R	AC3100L	10	20	18
AC3120R	AC3120L	12	20	18

Designed to be assembled on the drill 10mm shank  
Fits a range of drill Diameters

AC31112R	AC31112L	11-12	22	17
AC35101R*	AC35101L*	5-10	15.5	19
AC3510R	AC3510L	5-10	20	19

Locking screw - BR60060 (M6 x 6), Allen key - KEY030 (3mm)

\*Locking screw - BR40040 (M4 x 4), Allen key - KEY564 (2mm)

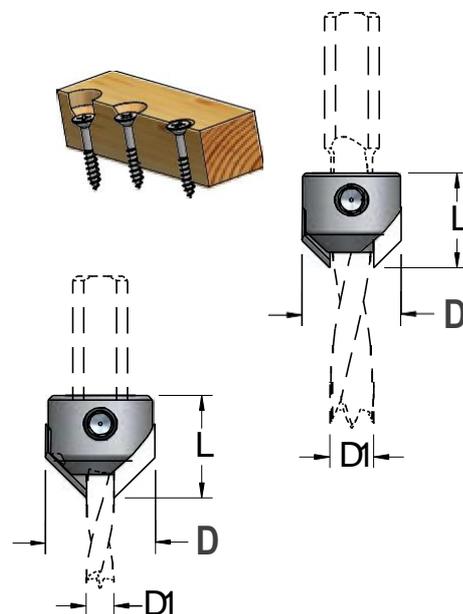

## ACK


### Countersinks - Combi System

Carbide Tipped.

HSSdrill included.

Tool No.	D1	D	L	d
	mm	mm	mm	mm
ACK4007	4.0	12.7	60	10x30
D				
ACK5007	5.0	12.7	60	10x30
D				

Locking screw - BR60050 (M6 x 5), Allen key - KEY030 (3mm)

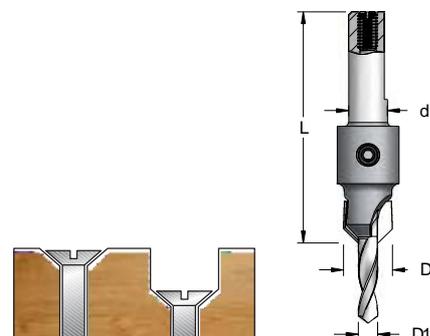

## ACF


### Face Frame Counterbore

Carbide tipped.

HSSdrill included.

Tool No.	D1	D	B	L	d
	mm	mm	mm	mm	mm
ACFS950S	3.45	9.5	9	104	9

Replaceable "Fish tail" drill - DR03450

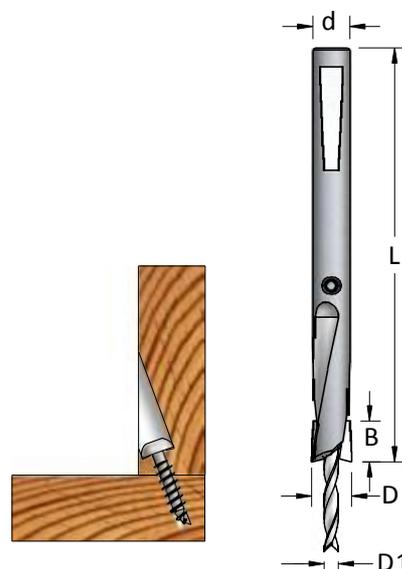

# DIAMOND ROUTER BITS

POD and Diamond Grit Coated router bits.

WPW POD bits last 30-50 times longer than Carbide tools and are very efficient in cutting abrasive materials including composites, particleboard, MDF and hardwoods.

Diamond Grit Coated Router Bits are designed for cutting Fiberglass, Carbon Fiber and other Composite materials.



1991



2003



2015

Year Developed

# Diamond Tipped PCD Router Bits

Polycrystalline Diamond (PCD) is an extremely hard cutting material. These Diamond tipped tools last 30- 50 times longer than Carbide tipped tools.

They are very efficient in cutting a wide variety of tough abrasive materials including composites, particleboard, MDF (either raw or laminated), HPL, veneers and hardwoods.

The common application is pre-cutting and sizing panels of abrasive materials in Point to Point CNC machines.

Designed for use on CNC machines, these tools have a much longer cutting life, eliminating the need to change tools often, saving setup time and minimizing the handling of dull tools.


The Up/ Down Shear design of the cutters, often referred to as "Compression" Bits, results in a good surface finish on double sided laminated materials.

## SR1

### 1+1 Straight PCD Bits - Up/Down

With Carbide Plunging tip.

Tool No.		D	B	L
d=12mm	d=1/2"	d=16mm	d=20mm	mm
	SR140958	9.5	25	75
SR141202		12	25	75
SR151202		12	34	85
	SR141278	12.7	25	75
	SR151278	12.7	34	85
	SR151601	16	35	85
	SR18200E	20	52	112

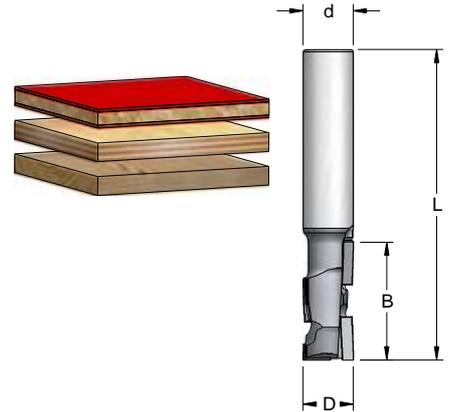


## SR2

### 2+2 High Production Straight PCD Bits - Up/Down

With Carbide Plunging tip.

Tool No.		D	B	L
d=16mm	d=20mm	mm	mm	mm
SR251601		16	34	94
	SR25200E	20	34	94

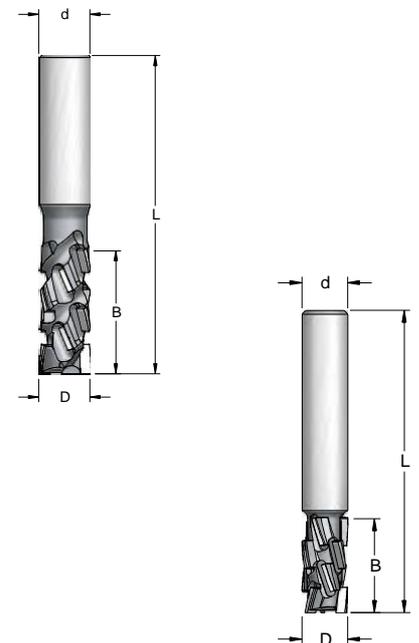

## SR3

### 3+3+1 Nesting Straight PCD Bits - Up/Down

With Diamond Plunging tip.

Body made of Densimet® (heavy metal tungsten alloy). Enables higher feed rates.


Tool No.	D	B	L
d=12mm	mm	mm	mm
SR341202	12	24	75

## PD

### Straight Plunge PCD Bits.

Single Flute. Designed for Routing Solid wood panels.

Tool No.		D	B	L
d=6mm	d=8mm	mm	mm	mm
PD12060		6	12	60
3				
PD13060		6	20	70
3				
	PD120805	8	12	70
	PD130805	8	20	70

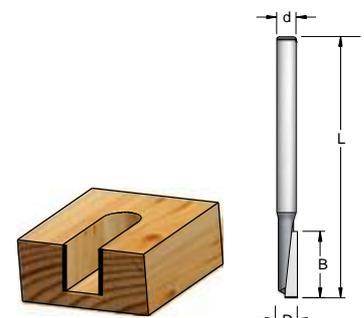


# FD

## Flush Trim PCD Bit.

2 Flutes. For super abrasive laminates, HPL, veneers ets.

Tool No.		D	B	L
d=6mm	d=1/4"	mm	mm	mm
FD221273	FD221274	12.7	13	58

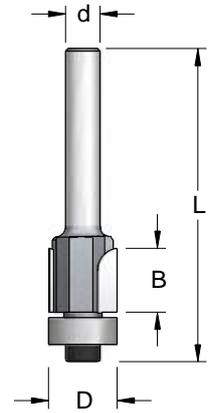

# Diamond Grit Coated Router Bits


For cutting Fiberglass, Carbon Fiber and other Composite materials

# PG

## Straight "Down-Cut" Bits.

With spiral cooling slots.

d=6mm	Tool No.		D	B	L	Diamond Grit size
	d=1/4"	d=3/8"	mm	mm	mm	
PG35063/501	PG35064/501		6.3	32	76	D501
PG36063/501	PG36064/501		6.3	38	76	D501
		PG36096/501	9.5	38	76	D50

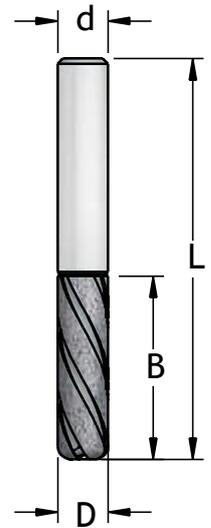

# FG



## Flush Trim Bits

With straight cooling slots.

Tool No.		D	B	L	Diamond Grit size	Ball Bearing
d=6mm	d=1/4"	mm	mm	mm		
FG30633/427	FG30634/427	6.3	19	59	D427	B063032
FG40633/427	FG40634/427	6.3	25	64	D427	B063032
FG40953/427	FG40954/427	9.5	25	67	D427	B095048

Tool No.		D	B	L	Diamond Grit size	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm		
FG41272/427	FG41278/427	12.7	25	83	D427	B127048
FG71282/427	FG71288/427	12.7	45	109	D427	B127048 x 2*
FG81282/427	FG81288/427	12.7	51	111	D427	B127048 x 2*

\*Double Bearing for added stability

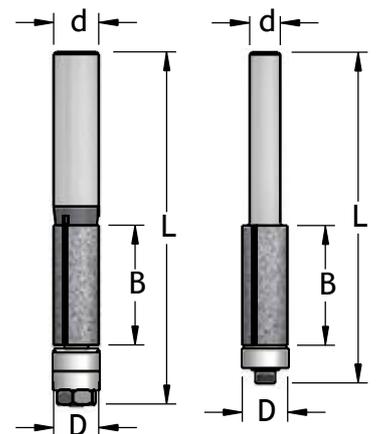

# PROFFESIONAL ROUTER BITS

With many creative ideas, this section presents a very comprehensive range of industrial quality Router Bits – Tungsten carbide tipped, solid carbide and replaceable carbide.

This range is the best choice when the quality of the cut and long tool life are the primary factors. It should satisfy the most demanding applications in manufacturing and in the woodworking trade.

Tools with harder WPWK-Carbide grade have up to 200 % longer lifetime than tools with standard carbide. They are excellent for cutting MDF and other hard materials.



Year Developed


1963

1985

2006

2014

2015

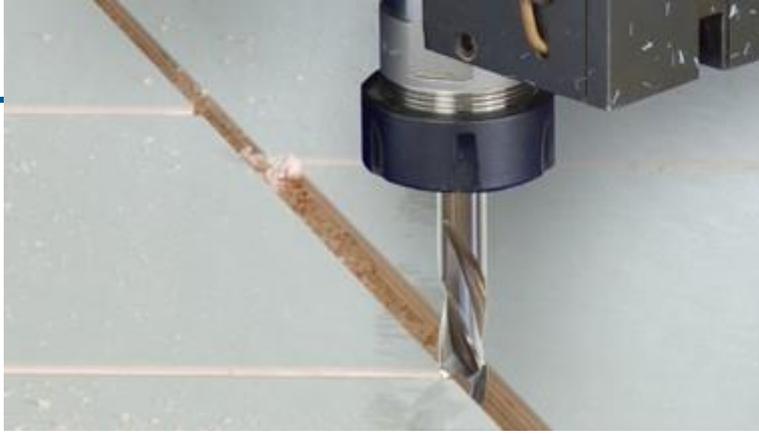

# Solid Carbide Spiral CNC Bits

For higher feed rates and longer tool life in CNC machines.

These tools cut with less energy and less vibration than Carbide Tipped straight router bits, leaving a perfect and clean finish on hardwood, softwood and man made materials.

Upcut geometry pulls the chips from the working area, allowing deep grooving and higher feedrates.


Downcut geometry directs chips towards the work piece and results smoother cut and cleaner edge of laminated boards.

The combination of Upcut and Downcut design, also called: "Compression", is ideal for perfect cutting with clean edges of double-sided laminated materials.

## SCU, SCS

### Double flute Spiral Bits - Upcut and Downcut


Upcut Tool No.	Downcut Tool No.	d = D mm	B mm	L mm
SCU22040h	SCS22040h	4	12	55
SCU230603	SCS230603	6	20	60
SCU240805	SCS240805	8	25	60
SCU251007	SCS251007	10	32	70
SCU271202	SCS271202	12	42	90

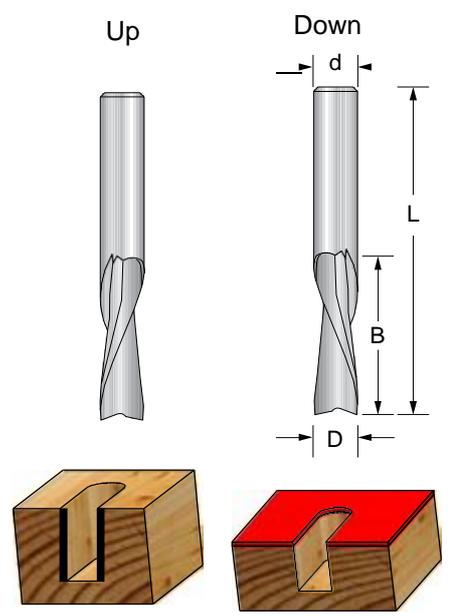

## SCC2

### "Compression" Bits - 2 Flutes

Tool No.	d = D mm	B mm	B1 mm	L mm
SCC240805	8	25	7	70
SCC251007	10	32	8	80
SCC251202	12	32	8	80

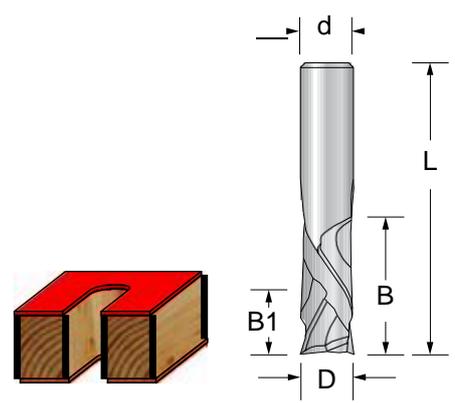


## SCC3

### Nesting "Compression" Bits – 3 flutes

The 3 flutes design allows higher feed rates than in any other cutting tool. The common application is "nesting", which is the process of laying out cutting patterns to minimize the raw material waste.

Tool No.	d = D mm	B mm	B1 mm	L mm
SCC341007	10	25	7	70
SCC351202	12	32	9	80
SCC351278	12.7 (1/2")	32	9	76

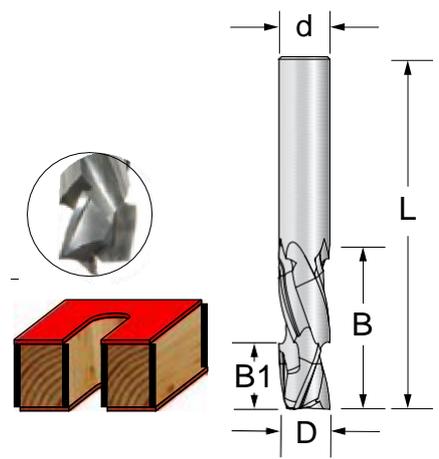

# STRAIGHT PLUNGE-CUTTING BITS-2 FLUTES, CARBIDE TIPPED


## P2

### Straight Plunge - Mini Bits

1/8" Shank for CNC Routers, Dremel and equivalent rotary machines

Solid Carbide Cutting Edge


Tool No.	D	B	L
d=1/8" (3.17mm)	mm	mm	mm
P21016i	1.6	4.8	38
P21024i	2.4	8	38
P21032i	3.2	11	38
P21048i	4.8	11	38

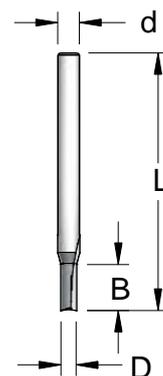

## P2

### Straight Bits with Solid Carbide Cutting Edge

Tool No.		D	B	L	
d=6mm	d=1/4"	d=8mm	mm	mm	mm
P210153	P210154		1.5	5	44
P210163	P210164		1.6	5	44
P210203	P210204	P210205	2.0	5	44
P210253	P210254		2.5	8	51
		P210275	2.7	8	51
P210303	P210304	P210305	3.0	11	51
P200323	P200324		3.2	8	47
P210323	P210324		3.2	11	51
P210353	P210354		3.5	11	51
P210403	P210404	P210405	4.0	11	51
		P220405	4.0	12	51
P210483	P210484		4.8	11	51
P210503	P210504	P210505	5.0	11	51
		P220505	5.0	16	57
P290503	P290504		5.0	11	60
P220503	P220504		5.0	16	57
P23S603	P23S604	P23S605	6.0	19	57
		P24S605	6.0	25	69

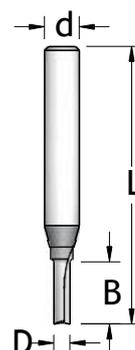


## P2

### Straight Bits

Tool No.		D	B	L	
d=6mm	d=1/4"	d=8mm	mm	mm	mm
P230603	P230604	P230605	6.0	19	51
P240603	P240604	P240605	6.0	25	57
P220633	P220634		6.3	13	51
P230633	P230634		6.3	19	51
P240633	P240634		6.3	25	57
P290633	P290634		6.3	25	73
P230703	P230704	P230705	7.0	19	51
P240703	P240704		7.0	25	57
P230803	P230804	P230805	8.0	19	51
P240803	P240804	P240805	8.0	25	57
P230953	P230954		9.5	19	51
P240953	P240954		9.5	25	57
P250953	P250954		9.5	32	63
P231003	P231004	P231005	10.0	19	51
P241003	P241004	P241005	10.0	25	57
P251003	P251004	P251005	10.0	32	63
P231103	P231104		11.0	19	51
P241103	P241104		11.0	25	57

Tool No.		D	B	L	
d=6mm	d=1/4"	d=8mm	mm	mm	mm
P231203	P231204	P231205	12.0	19	51
P241203	P241204	P241205	12.0	25	57
		P251205	12.0	32	63
		P271205	12.0	42	73
P231273	P231274		12.7	19	51
P241273	P241274		12.7	25	57
P251273	P251274	P251275	12.7	32	63
P231403	P231404	P231405	14.0	19	51
P231433	P231434		14.3	19	51
P231503	P231504	P231505	15.0	19	51
P231603	P231604	P231605	16.0	19	51
P241603	P241604	P241605	16.0	25	57
P231703	P231704		17.0	19	51
P231803	P231804	P231805	18.0	19	51
P231903	P231904	P231905	19.0	19	51
P232003	P232004	P232005	20.0	19	51
P232203	P232204	P232205	22.0	19	51
P232503	P232504	P232505	25.0	19	51
P232543	P232544		25.4	19	51


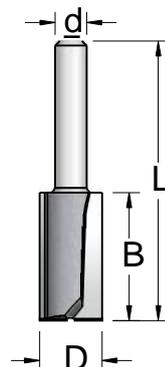


Produced with Harder K-Carbide whenever possible

## P2

### Straight Bits with Solid Carbide Cutting Edge.



Tool No.		D	B	L
d=12mm	d=1/2"	mm	mm	mm
P210402	P210408	4.0	11	63
P210502	P210508	5.0	11	63
P23S602	P23S608	6.0	19	63
P24S602	P24S608	6.0	25	76
P24S632	P24S638	6.3	25	76

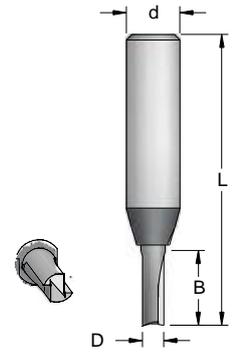


## P2

### Straight Bits

Tool No.		D	B	L
d=12mm	d=1/2"	mm	mm	mm
P230602	P230608	6.0	19	63
P230632	P230638	6.3	19	63
P240632	P240638	6.3	25	70
P230702	P230708	7.0	19	70
P230802	P230808	8.0	19	63
P240802	P240808	8.0	25	70
P230952	P230958	9.5	19	63
P240952	P240958	9.5	25	70
P250952	P250958	9.5	32	76
P241002	P241008	10.0	25	70
P251002	P251008	10.0	32	76
P241102	P241108	11.0	25	70
P251102	P251108	11.0	32	76
P241202	P241208	12.0	25	70
P251202	P251208	12.0	32	73
P261202	P261208	12.0	38	80
P281202	P281208	12.0	51	108
P201202		12.0	75	133
P231272	P231278	12.7	19	57
P241272	P241278	12.7	25	67
P251272	P251278	12.7	32	73
P261272	P261278	12.7	38	80
P271272	P271278	12.7	38	108
P281272	P281278	12.7	51	108
P291272	P291278	12.7	63	114
P201272	P201278	12.7	75	133
P261302	P261308	13.0	38	80
P251352	P251358	13.5	32	73
P241402	P241408	14.0	25	70
P251402	P251408	14.0	32	73

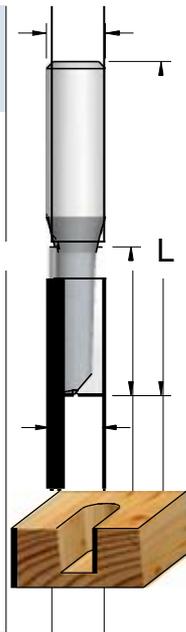

Tool No.		D	B	L
d=12mm	d=1/2"	mm	mm	mm
P241432	P241438	14.3	25	70
P251432	P251438	14.3	32	73
P241602	P241608	16.0	25	70
P251602	P251608	16.0	32	73
P261602	P261608	16.0	38	80
P281602	P281608	16.0	51	96
P241702	P241708	17.0	25	70
P251762	P251768	17.5	32	73
P241802	P241808	18.0	25	70
P251802	P251808	18.0	32	73
P241902	P241908	19.0	25	70
P251902	P251908	19.0	32	73
P261902	P261908	19.0	38	80
P281902	P281908	19.0	51	96
P252002	P252008	20.0	32	73
P282002	P282008	20.0	51	96
P252202	P252208	22.0	32	73
P252222	P252228	22.2	32	73
P252502	P252508	25.0	32	73
P242542	P242548	25.4	25	70
P252542	P252548	25.4	32	73
P253002	P253008	30.0	32	73
P253202	P253208	31.8	32	73
P253502	P253508	35.0	32	73
P253802	P253808	38.1	32	73
P254502	P254508	44.5	32	73
P255102	P255108	51.0	32	73

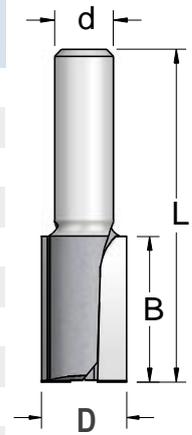


## P2...XK

### Straight CNC Long Bits

Extended shank and hard K-Carbide grade, makes these tools perfect for CNC routing and router table jobs. Excellent for cutting MDF and other hard material. Upto 200 % longer lifetime when cutting abrasive materials. 2 Flutes

Tool No.		D	B	L
d=8mm	d=12mm	mm	mm	mm
P241805XK		18.0	25	70
P242005XK		20.0	25	70
P242205XK		22.0	25	70
P242405XK		24.0	25	70
P242505XK		25.0	25	70
	P261802XK	18.0	38	90
	P262002XK	20.0	38	90
	P262202XK	22.0	38	90
	P262402XK	24.0	38	90
	P262502XK	25.0	38	90

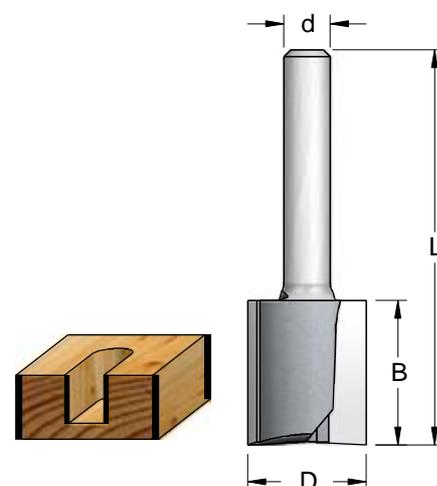

## NEED AN EVEN LONGER TOOL?

Check our TX – Shank Extension Adapters, Pg 83.

These adapters, allow deeper reach for wide range of applications.

Very useful when the bit is too short for the job.




## PT

### Straight Bits - Carbide Center Tip with hard K-Carbide grade.

For faster and easier plunging. Longer tool life when plunging hard materials.

Tool No.			D	B	L
d=8mm	d=12mm	d=1/2"	mm	mm	mm
PT30805			8.0	19	51
PT31005			10.0	19	51
PT41205			12.0	25	57
PT41605			16.0	25	57
	PT30802	PT30808	8.0	19	63
	PT31002	PT31008	10.0	19	63
	PT41202	PT41208	12.0	25	67
	PT81202	PT81208	12.0	51	108
	PT41402	PT41408	14.0	25	67
	PT41602	PT41608	16.0	25	67
	PT81602	PT81608	16.0	51	108
	PT41802	PT41808	18.0	25	67
	PT42002	PT42008	20.0	25	67
	PT42542	PT42542	25.4	25	67

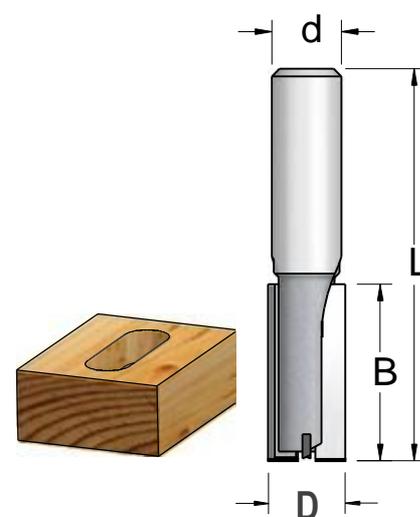


# Straight Plunge Cutting Bits - Single Flute

For faster feed rates and maximum stock removal.

## P1

Single Flute with Solid Carbide cutting edge.


Tool No.		D	B	L	
d=6mm	d=1/4"	d=8mm	mm	mm	
P110103	P110104	1.0	3	43	
P110153	P110154	1.5	5	43	
P110163	P110164	P110165	1.6	5	43
P110183	P110184	1.8	5	43	
P110203	P110204	P110205	2.0	5	43

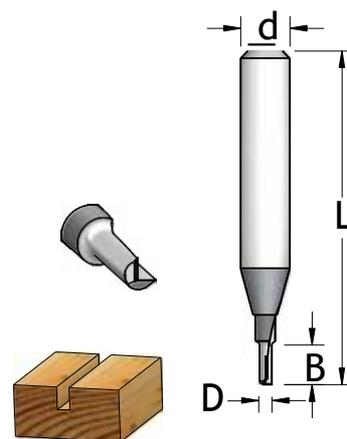

## P1

Single Flute

Tool No.		D	B	L
d=6mm	d=1/4"	mm	mm	mm
P130633	P130634	6.3	19	51
P131273	P131274	12.7	19	51
P131903	P131904	19.0	19	51

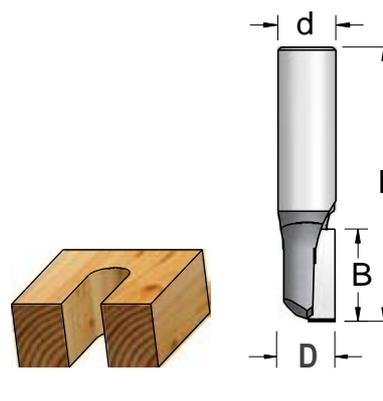


Tool No.		D	B	L
d=12mm	d=1/2"	mm	mm	mm
P130632	P130638	6.3	19	63
P140952	P140958	9.5	25	70
P150952	P150958	9.5	32	76
P141272	P141278	12.7	25	67
P151272	P151278	12.7	32	73
P161272	P161278	12.7	38	80
P181272	P181278	12.7	51	108

## P..L

Left Hand Straight Plunge Cutting Bits

2 Flutes, left hand rotation

Tool No.		D	B	L
d=12mm	d=1/2"	mm	mm	mm
P230632L	P230638L	6.3	19	63
P241272L	P241278L	12.7	25	67
P281272L	P281278L	12.7	51	108

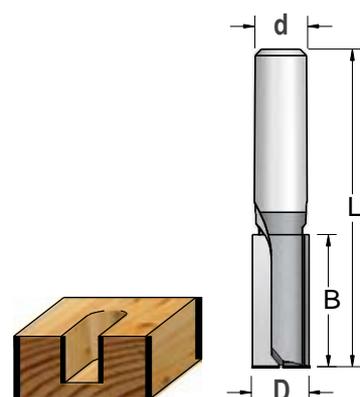




## P3, P3U

### Straight Plunge Cutting Bits - 3Flutes

Hard K-Carbide grade.

For better surface finish and longer tool life than tools with 2 flutes

Tool No.		D	B	L
d=12mm	d=1/2"	mm	mm	mm
P381272	P381278	12.7	51	108
Up Shear				
P3U4102	P3U4108	9.5	25	71
P3U6122	P3U6128	12.7	38	84

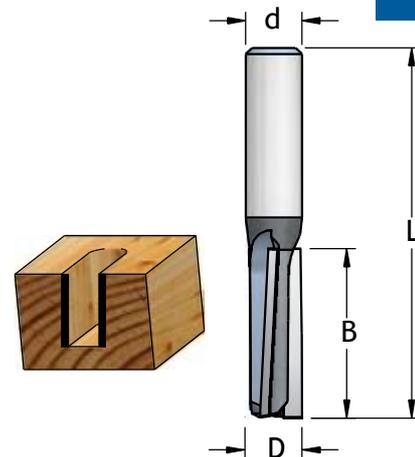


## PU

### Up Shear - Straight Bits

Heavy duty, faster feed rate and increased tool life. For deep grooving in hard wood, MDF and other man made materials.

2 Flutes

Tool No.		D	B	L
d=12mm	d=1/2"	mm	mm	mm
PU41272	PU41278	12.7	25	67
PU5127	PU51278	12.7	32	73
2				
PU6127	PU61278	12.7	38	80
2				
PU8127	PU81278	12.7	51	108
2				
PU5190	PU51908	19.0	32	73
2				

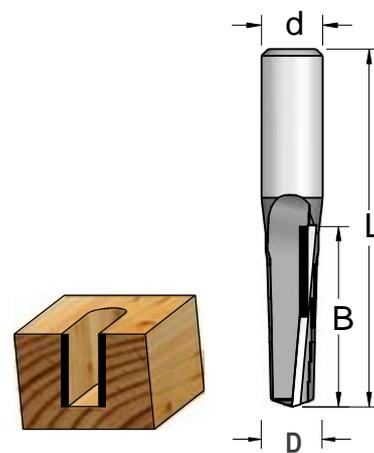


## PS

### Down Shear - Straight Bits

For smoother cut and cleaner edge of laminated boards. Directs chips towards the work piece. 2 Flutes

Tool No.		D	B	L
d=12mm	d=1/2"	mm	mm	mm
PS5127	PS51278	12.7	32	73
2				
PS8127	PS81278	12.7	51	108
2				

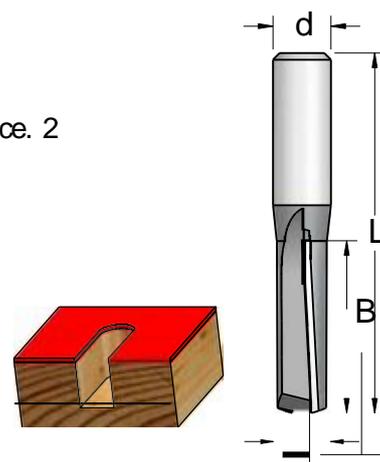


## STAGGER TOOTH STRAIGHT BITS

For fast stock removal like a single flute, but better balanced and increased strength.  
1 + 1 Flutes

### ST

#### Stagger Tooth Plunge Cutting Bits

Tool No.		D	B	L
d=12mm	d=1/2"	mm	mm	mm
ST60952	ST60958	9.5	38	80
ST61272	ST61278	12.7	38	80
ST81272	ST81278	12.7	51	108
ST91272	ST91278	12.7	57	114
ST01272	ST01278	12.7	63	114
ST0X132X	ST0X138X	12.7	67	120
ST0X132G	ST0X138G	12.7	67	140

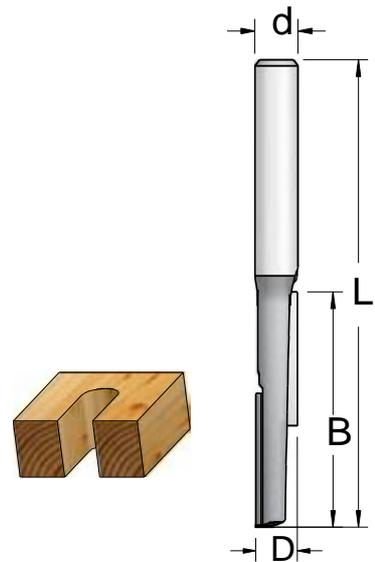


### STS

#### Stagger Straight Shear Bits

Up and down shear angle. For cleaner edges of double faced boards, plywoods and natural woods.

Tool No.		D	B	L
d=12mm	d=1/2"	mm	mm	mm
STS6132	STS6138	12.7	38	79

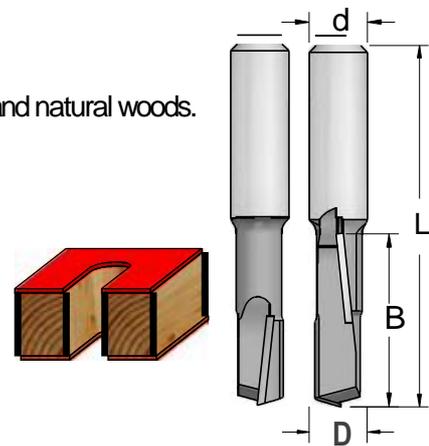


## Carbide Tipped Surfacing Bits

Used to resurface or plane machines Spoilboard. Also, used when unusual timbers need to be flattened before they can be used. For use in Router machines and CNC machines. The open structure allows fast chip ejection. The tools are designed with 3 and 4 flutes for smooth surface finish.

### P32

3 flutes.


Tool No.		D	B	L
d=6mm	d=1/4"	mm	mm	mm
P322853	P322854	28.5	12.7	41

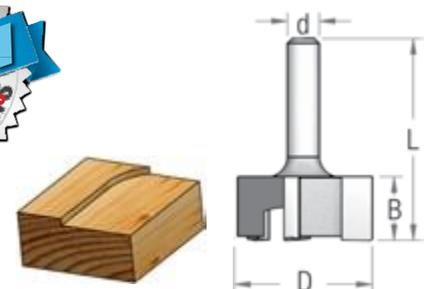

### P42

4 flutes

Tool No.		D	B	L
d=12mm	d=1/2"	mm	mm	mm
P423802	P423808	38.0	12.7	57
P425102	P425108	50.8	12.7	63

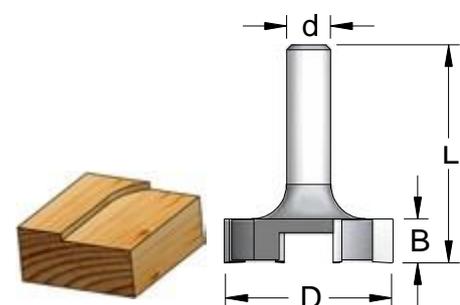


# MORTISING BITS

## MB

### Hinge Mortising Bits

This special design is best for plunging and mortising shallow grooves.

Tool No.		D	B	L	
d=6mm	d=1/4"				
		d=8mm	mm	mm	
		MB12005	12.0	12	90
MB31273	MB31274	12.7	19	51	
MB31603	MB31604	16.0	19	51	
MB31903	MB31904	19.0	19	51	
Tool No.		D	B	L	
d=12mm	d=1/2"				
		d=8mm	mm	mm	
MB33202	MB33208	31.8	19	54	


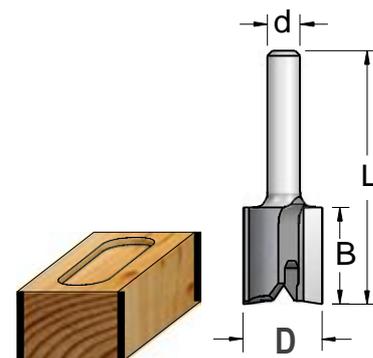


## MB...0

### Lock Mortising Cutters – Screw Type

2 Flutes


Tool No.	D	B	L
	mm	mm	mm
Straight Cut			
P220630	6.3	12	34
P220990	10.0	15	34
Down Shear			
MB08000	12.7	15	
MB10010	16.0	15	
MB12020	19.0	15	
MB200M0	20.0	15	
MB14010	22.2	15	
MB16010	25.4	15	
MB18010	28.6	15	
MB20000	31.8	16	

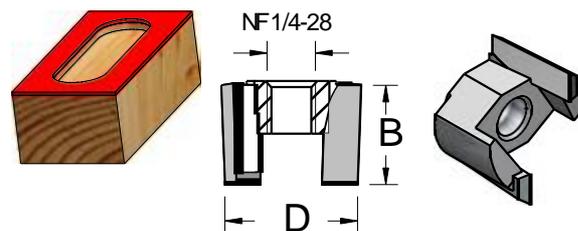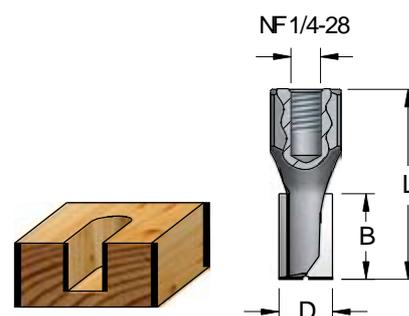

## NMB

### Arbors for Mortising Cutters – Screw Type

Tool No.		D	L		
d=6mm	d=1/4"				
		d=12mm	d=1/2"		
NMB0013	NMB0014		NF 1/4-28	40	
		NMB0032	NMB0038	NF 1/4-28	38
		NMB0012	NMB0018	NF 1/4-28	60

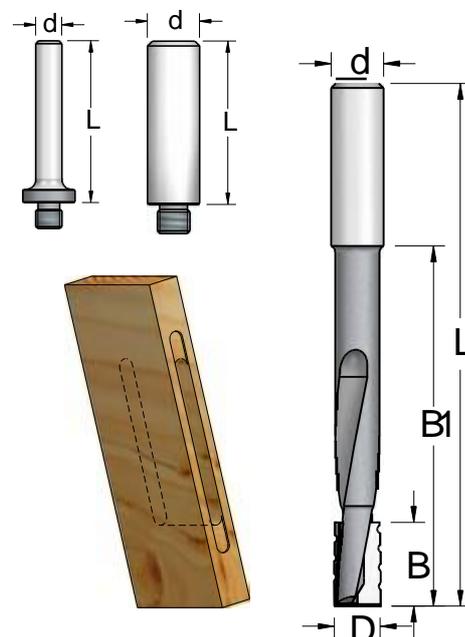


## DT

### Mortising Bits for Lock Case


Up-Shear spiral design for deep grooving. Carbide tipped with chip breaker. For cutting mortise slots in doors and furniture with reciprocating feed motion.

Tool No.		D	B	B1	L	
d=12mm	d=1/2"					
		d=16mm	mm	mm	mm	
DT12702	DT12708	12.7	25	72	151	
DT14002	DT14008	DT14001	14.0	25	110	160
DT16002M	DT16008M	16.0	25	80	130	
DT16002	DT16008	DT16001	16.0	25	120	170
DT18002	DT18008	DT18001	18.0	25	120	170
DT19002	DT19008	19.0	25	120	170	

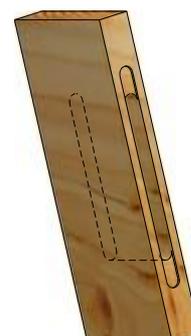

# CNC STRAIGHT PRODUCTION BITS **Up-Shear** POWER




The shearing action of the US and UB series yields cleaner cuts with less energy and less vibration than the standard straight bits. The helical ground razor-sharp cutting edges provide superior finish. Spiral upshear geometry pulls the chips from the working area, allowing deeper penetration with higher feed rates. The result is – long tool life during CNC operations at an affordable price. The use of these tools can prove, in many cases, to be more economical than the use of expensive spiral solid carbide tools. Using the Chipbreaker (Semi-finishing) - UB- Up-Shear Bits allows even higher feed rates leaving a relatively smooth surface finish. Designed for CNC machines, the tools are available with large shank diameters.



## US2

2 Flutes




Tool No.		D	B	B1	L
d=12mm	d=1/2"	mm	mm	mm	mm
2 Flutes					
US25132	US25138	12.7	32	45	90
US27132	US27138	12.7	42	55	105
	US25161	16.0	32	50	100
	US2720E	20.0	42	60	120
2+2 Flutes					
US28132	US28138	12.7	50	60	110
	US2820E	20.0	50	65	125

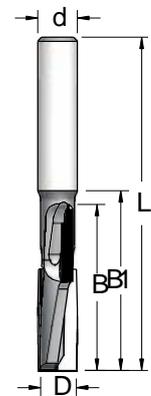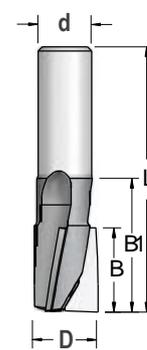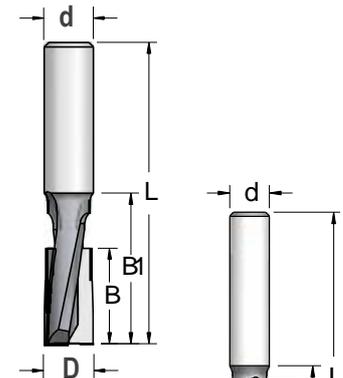

## US3

3 Flutes




Tool No.		D	B	B1	L
d=16mm	d=20mm	mm	mm	mm	mm
US35161		16.0	32	50	100

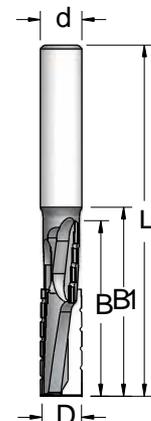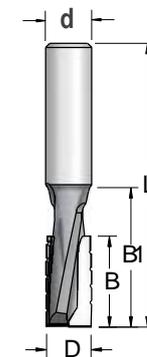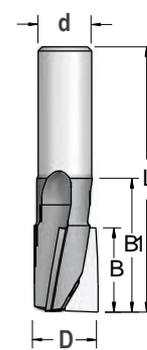

## UB2

2 Flutes with Chipbreaker.  
For roughing and semi finishing.


Tool No.		D	B	B1	L
d=12mm	d=1/2"	mm	mm	mm	mm
2 Flutes					
UB27132	UB27138	12.7	42	55	105
2+2 Flutes					
UB28132	UB28138	12.7	50	60	110

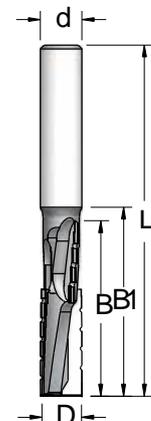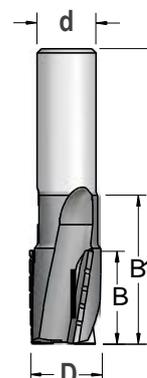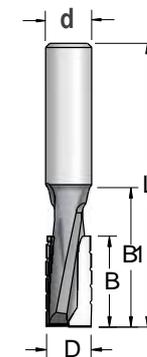

## UB3

3 Flutes with Chipbreakers

Tool No.		D	B	B1	L
d=16mm	d=20mm	mm	mm	mm	mm
UB35161		16.0	32	50	100

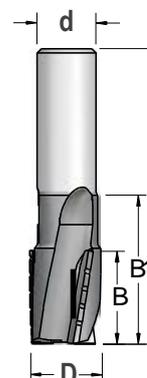

## PF TEMPLATE ROUTER BITS

Plunge-cutting straight Bits with shank mounted (top) bearing pilot.

This type of flush trim bits is designed for template / pattern routing from simple cuts to complex curves.

The bearing has the same Diameter as the cutter and it enables following pre-shaped templates and forming an exact duplicate of the template. Ideal for producing identical parts when needed.

As the bearing is mounted on the shank, it has been limited to relatively big cutter Diameters. WPW has developed unique Line of tools (PFT), which enables us to offer smaller cutters than ever, as small as 4.8mm!



## PF

### Straight Plunge Template Bits

Tool No.		D	B	L	Ball Bearing	Retaining Collar
d=6mm	d=1/4"	d=8mm	mm	mm	mm	
PF10953	PF10954		9.5	6.5	44.5	B095063x2 PF09500
PF20953	PF20954		9.5	13	51	B095063x2 PF09500
PF30953	PF30954		9.5	19	56	B095063x2 PF09500
PF40953	PF40954		9.5	25	63	B095063x2 PF09500
		PF41205	12.0	25	70	B120080x2 PF08010
PF01273	PF01274		12.7	6.3	42	B127063 PF06300
PF11303	PF11304		12.7	9.5	57	B127063 PF06300
PF11313	PF11314*		12.7	9.5	60	B159063 PF06300
PF21273	PF21274		12.7	13	50	B127063 PF06300
PF31273	PF31274		12.7	19	57	B127063 PF06300
PF41273	PF41274		12.7	25	63	B127063 PF06300
PF51273	PF51274		12.7	32	70	B127063 PF06300
PF41603	PF41604		16.0	25	63	B159063 PF06300
		PF41605	16.0	25	67	B160080 PF08000
		PF51605	16.0	32	73	B160080 PF08000
PF41903	PF41904		19.0	25	63	B190063 PF06300
		PF42605	26.0	25	70	B260100 PF10000

\*Fits Porter Cable kit model #59370 - Door Hinge template

Tool No.		D	B	L	Ball Bearing	Retaining Collar
d=12mm	d=1/2"	mm	mm	mm		
PF31902	PF31908	19.0	19	70	B190127 x2	PF19000
PF41902	PF41908	19.0	25	77	B190127 x2	PF19000
PF71902	PF71908	19.0	45	95	B190127 x2	PF19000
PF81902	PF81908	19.0	51	102	B190127 x2	PF19000
PF72542	PF72548	25.4	45	96	B254127	PF19000
PF62852	PF62858	28.6	38	90	B285127	PF12700
PF82852	PF82858	28.6	51	103	B285127	PF12700

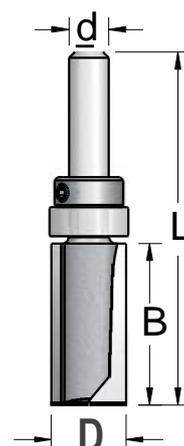




## PFS

### Straight Down Shear Template Bits

For better finish on laminates.

Tool No.		D	B	L	Ball Bearing	Retaining Collar
d=12mm	d=1/2"	mm	mm	mm		
PFS5192	PFS5198	19.0	32	83	B190127x2	PF19000
PFS6192	PFS6198	19.0	38	89	B190127x2	PF19000
PFS8192	PFS8198	19.0	51	102	B190127x2	PF19000

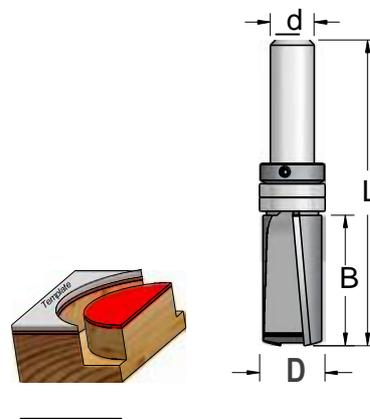


## P3F

### Straight Plunge Template Bits - 3 Flutes


For better surface finish and longer tool life than tools with 2 flutes.

Tool No.				D	B	L	Ball Bearing	Retaining Collar
d=6mm	d=1/4"	d=12mm	d=1/2"	mm	mm	mm		
P3F2103	P3F2104			9.5	12	50	B095063x2	PF09500
P3F4123	P3F4124			12.7	25	63	B127063	PF06300
		P3F4192	P3F4198	19	25	76	B190127x2	PF19000
		P3F5192	P3F5198	19	32	84	B190127x2	PF19000

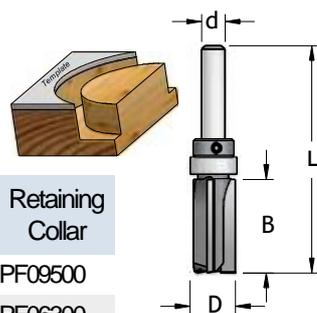


#### Up Shear

P3FU2103	P3FU2104			9.5	12	50	B095063x2	PF09500
P3FU4123	P3FU4124			12.7	25	63	B127063	PF06300
		P3FU1192	P3FU1198	19	10	81	B190127x2	PF19000
		P3FU4192	P3FU4198	19	25	76	B190127x2	PF19000

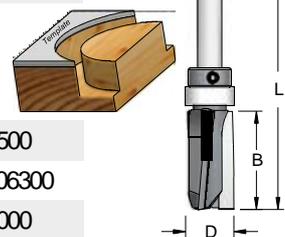

#### Down Shear

P3FS2103	P3FS2104			9.5	12	50	B095063x2	PF09500
P3FS4123	P3FS4124			12.7	25	63	B127063	PF06300
		P3FS4192	P3FS4198	19	25	76	B190127x2	PF19000

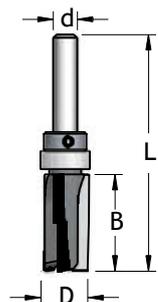

Produced with Harder K-Carbide whenever possible




# PFT


## Mini Straight Template Bits

Template routing is now possible with a smaller cutter than ever!


The top bearings have the same Diameter as the shank, or even smaller. Important feature in jobs with complex shapes when small diameter cutters are needed. Allows getting into tighter corners.



Tool No.	D	B	L	Ball Bearing
d=1/8" (3.17mm)	mm	mm	mm	
<b>1/8" Shank for CNC Routers, Dremel and equivalent rotary machines</b>				
PFT2048i	4.8	12	50	B048024
PFT1063i	6.3	6	50	B063032

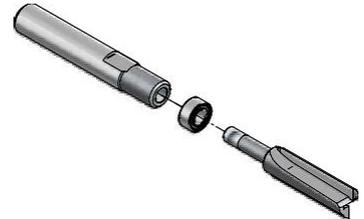

Tool No.	D	B	L	Ball Bearing
d=6mm      d=1/4"	mm	mm	mm	
PFT10483      PFT10484	4.8	6.5	47	B048024
PFT20483      PFT20484	4.8	12	51	B048024
PFT10633      PFT10634	6.3	6.5	49	B063032
PFT30633      PFT30634	6.3	19	62	B063032

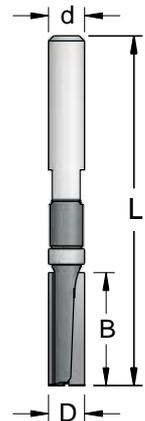

Tool No.	D	B	L	Ball Bearing
d=12mm      d=1/2"	mm	mm	mm	
PFT40952      PFT40958	9.5	25	82	B095063x2
PFT51272      PFT51278	12.7	32	90	B127063


# PFM

## Straight Plunge Template Bits with 2 Replaceable Carbide Blades

Reduces set-up time and is cost effective.

Supplied with Tox Key.

Tool No.	D	B	L	Blade No.	Ball Bearing	Retaining Collar
d=12mm      d=1/2"	mm	mm	mm			
2 gripping screws						
PFM7192      PFM7198	19.0	50	100	CM05012 x2	B190127 x2	PF19000
3 gripping screws for heavy duty tasks						
PFM8192 /K      PFM8198 /K	19.0	50	100	CM501217 x2	B190127 x2	PF19000

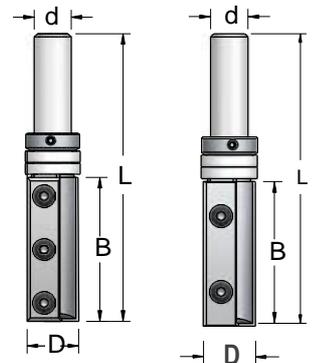


K- Can be ordered with Harder K-Carbide. While ordering, just add the letter "K" to the Tool No.  
Tox Screw - BT40060



## FP Multi Trimmers

These multi purpose cutters integrate the standard flush trim bits - bottom bearing, with the template bits - top bearing. It allows the cutter to be used with the template mounted on either side of the work. Consequently, it is possible to cut from either direction, using only one template and without moving the template to the other side of the workpiece. This is especially useful when cutting curves which run both with and against the grain.

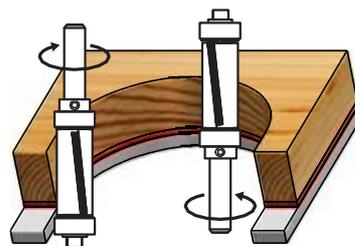

## FPS

### Down Shear Multi Trimmer

Ensures a clean cut even in difficult materials.

Tool No.		D	B	L	Ball Bearing	Retaining Collar
d=12mm	d=1/2"	mm	mm	mm		
FPS5192	FPS5198	19.0	32	96	B190063+ B190127 x2	PF19000
FPS8192	FPS8198	19.0	51	114	B190063+ B190127 x2	PF19000




## F4P

### 4 Flutes Multi Trimmer

For better surface finish and longer tool life in hard wood, solid surface and similar materials.

Tool No.		D	B	L	Ball Bearing	Retaining Collar
d=12mm	d=1/2"	mm	mm	mm		
F4P8192	F4P8198	19.0	51	117	B190063+ B190127 x2	PF19000

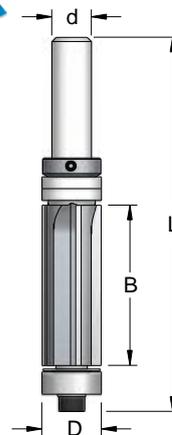

## FPM


### Multi Trimmer with 2 replaceable Carbide Blades

Reduces set up time and cost effective.

3 gripping screws for heavy duty tasks.

Supplied with Torx Key.

Tool No.		D	B	L	Blade No.	Ball Bearing	Retaining Collar
d=12mm	d=1/2"	mm	mm	mm			
FPM1922/K	FPM1928/K	19.0	50	118	CM501217 x2	B190063+ B190127 x2	PF19000

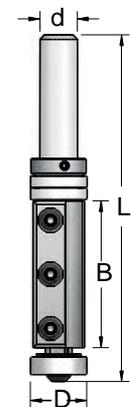

K- Can be ordered with Harder K-Carbide. While ordering, just add the letter "K" at the end of the Tool No.  
Replacement Torx Screw – BT40060



## FLUSH TRIM BITS


With Ball Bearing Guide.

### F2

#### 2 Flutes


Tool No.	D	B	L	Ball Bearing
d=1/8" (3.17mm)	mm	mm	mm	
1/8" Shank for CNC Routers, Dremel and equivalent rotary machines				
F21048i	4.8	10	44	B048024

Tool No.	D	B	L	Ball Bearing	
d=6mm	d=1/4"	mm	mm	mm	
Nano Flush Trimmers with Miniature Bearing					
F210483	F210484	4.8	11	51	B048024
F230483	F230484	4.8	19	61	B048024

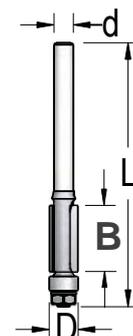

Tool No.	D	B	L	Ball Bearing		
d=6mm	d=1/4"	d=8mm	mm	mm	mm	
F220633	F220634		6.3	13	52	B063032
F230633	F230634		6.3	19	57	B063032
F240633	F240634	F240635	6.3	25	63	B063032
F250633	F250634		6.3	32	70	B063032
F240803	F240804		8.0	25	66	B080040
F220953	F220954	F220955	9.5	13	53	B095048
F230953	F230954		9.5	19	61	B095048
F240953	F240954	F240955	9.5	25	65	B095048
F250953	F250954		9.5	32	67	B095048
F221273	F221274	F221275	12.7	13	53	B127048
F231273	F231274		12.7	19	61	B127048
F241273	F241274	F241275	12.7	25	65	B127048
F251273	F251274		12.7	32	71	B127048
		F271275	12.7	42	86	B127048

Tool No.	D	B	L	Ball Bearing	
d=12mm	d=1/2"	mm	mm	mm	
NanoFlush Trimmers with Miniature Bearing					
F241272	F241278	12.7	25	80	B127048
F251272	F251278	12.7	32	90	B127048
F261272	F261278	12.7	38	96	B127048
F281272	F281278	12.7	51	115	B127048
F241902	F241908	19.0	25	76	B190063

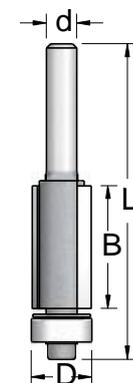

Produced with Harder K-Carbide whenever possible



## F3


### 3 Flutes

For better surface finish and longer tool life in hard materials – wood, solid surface and others

d=6mm	Tool No.	d=8mm	D	B	L	Ball Bearing
d=1/4"			mm	mm	mm	
F321273	F321274		12.7	13	53	B127048
F341273	F341274	F341275	12.7	25	65	B127048
d=12mm	To No.	D	B	L	Ball Bearing	
d=1/2"		mm	mm	mm		
F341272	F341278	12.7	25	80	B127048	
F361272	F361278	12.7	38	96	B127048	
F381272	F381278	12.7	51	115	B127048	



Produced with Harder K-Carbide whenever possible


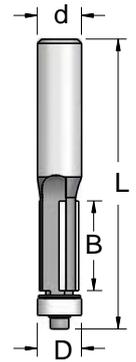


## F4

### 4 Flutes

For better surface finish and longer tool life in hard wood, solid surface and similar materials.

d=12mm	Tool No.	D	B	L	Ball Bearing
d=1/2"		mm	mm	mm	
F441902	F441908	19.0	25	75	B190063
F461902	F461908	19.0	38	99	B190063
F481902	F481908	19.0	51	105	B190063

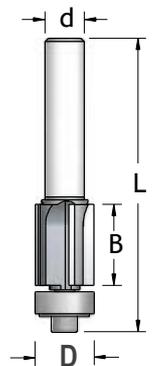


## F2/F3

### Double Bearing Flush Trim Bits

For added stability.

d=6mm	Tool No.	D	B	L	Flutes	Ball Bearing
d=1/4"		mm	mm	mm		
F240983	F240984	9.5	25	71	2	B095048x2
d=12mm	Tool No.	D	B	L	Flutes	Ball Bearing
d=1/2"		mm	mm	mm		
F261282	F261288	12.7	38	103	2	B127048x2
F361282	F361288	12.7	38	103	3	B127048x2
F281282	F281288	12.7	51	111	2	B127048x2

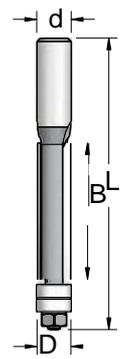

Produced with Harder K-Carbide whenever possible

## FM

### Flush Trim Bit with replaceable Carbide Blades

Reduces set up time and cost effective.

Supplied with Tox Key.

Tool No.		D	B	L	Blade No.	Ball Bearing	
d=6mm	d=1/4"	d=8mm	mm	mm	mm		
FM19003	FM19004	FM19005	19.0	12	52	CM01212x2	B190060
FM19013 /K	FM19014 /K	FM19015 /K	19.0	30	70	CM03012b x2	B190060

Tool No.		D	B	L	Blade No.	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm		

2 gripping screws


FM19012 /K	FM19018 /K	19.0	30	79	CM03012b x2	B190060
------------	------------	------	----	----	-------------	---------

3 gripping screws for heavy duty tasks

FM19022 /K	FM19028 /K	19.0	50	110	CM501217 x2	B190060
------------	------------	------	----	-----	-------------	---------



K- Can be ordered with Harder K-Carbide. While ordering, just add the letter "K" at the end of the Tool No.  
Replacement Tox Screw – BT40060

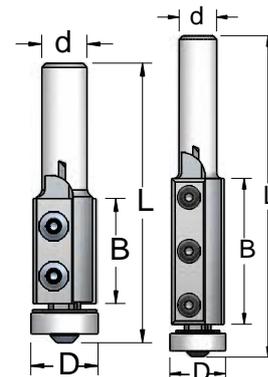



## FO

### Overhang Trim Bits

Used when the upper panel should overhang the side panel.

Common for making lighted sign letters.

Tool No.		C	D	B	L	Ball Bearing
d=6mm	d=1/4"	mm	mm	mm	mm	
FO20953	FO20954	0.75	9.5	13	53	B110050
FO21953	FO21954	0.25	9.5	13	53	B100050

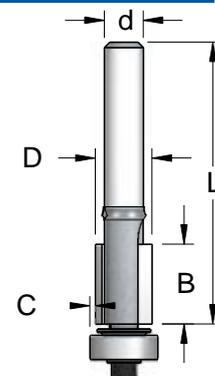


## FT

### Double Sided Laminate Trimmer

Up/Down shear cutter assembly. Can be used for laminated boards of thickness 11mm up to 35mm

Tool No.		D	B	B1	L	Ball Bearing	
d=6mm	d=1/4"	d=8mm	mm	mm	mm		
FT51273	FT51274	FT51275	12.7	35	13	65	B127063

Tool No.		D	B	B1	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm	
FT51272	FT51278	12.7	35	13	79	B127063

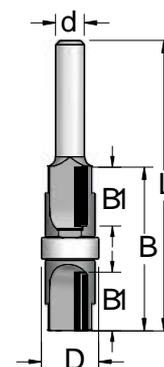


## FU

### Up Shear Flush Trim Bits

For Faster Feed Rates.

Tool No.		D	B	L	Ball Bearing
d=6mm	d=1/4"	mm	mm	mm	
FU41273	FU41274	12.7	25	80	B127048

Tool No.		D	B	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	
FU61902	FU61908	19.0	38	100	B190063
FU81902	FU81908	19.0	51	113	B190063

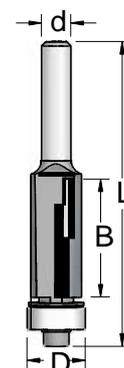


# FS

## Down Shear Laminate Trimmers

Eliminates chipping, cleaner edge when trimming veneered plywood and laminated boards.

Tool No.		D	B	L	Ball Bearing	
d=6mm	d=1/4"	d=8mm	mm	mm	mm	
FS20953	FS20954		9.5	13	53	B095048
FS41273	FS41274	FS41275	12.7	25	65	B127048
F221603	F221604		16.0	16	55	B160050
F221903	F221904		19.0	16	61	B190063

Tool No.		D	B	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm
FS41272	FS41278	12.7	25	80	B127048
FS61902	FS61908	19.0	38	100	B190063
FS81902	FS81908	19.0	51	113	B190063

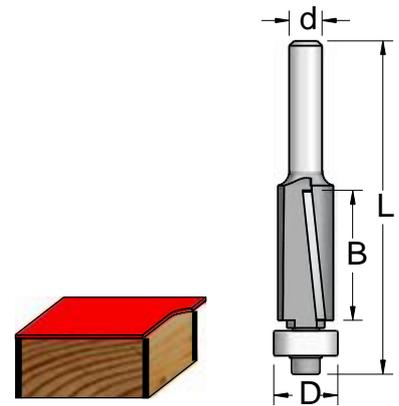


# FSG

## Laminate Trimmers with Adhesive Trapping Gap

Smooth guiding despite excess of glue.

Tool No.		D	B	B1	L	Ball Bearing
d=6mm	d=1/4"	mm	mm	mm	mm	mm
FSG1273	FSG1274	12.7	25	8	72	B127048

Tool No.		D	B	B1	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm	mm
FSG1272	FSG1278	12.7	25	8	82	B127048

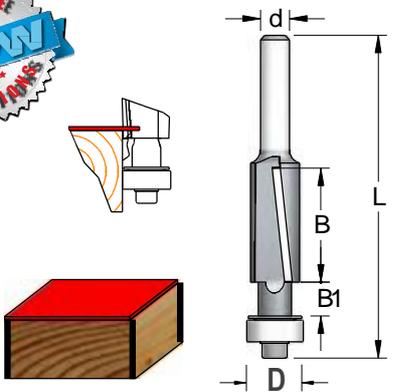

# Bevel Trim Bits


# SL

## Bevel Trim Bit - Down Shear

Smooth guiding despite excess of glue.

The combination of 8° bevel and the down shear flute design, ensures a perfect clean finish on laminates.

Tool No.		a	D	B	L	Ball Bearing
d=6mm	d=1/4"	degrees	mm	mm	mm	mm
SL20803	SL20804	8	16	12	58	B127048

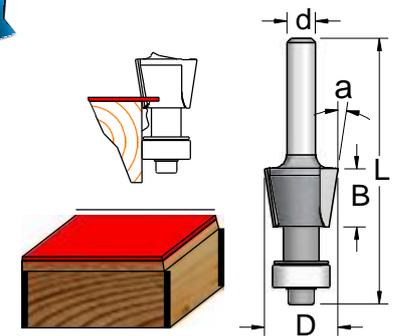


# SL

## Nano Bevel Trim bits with Miniature Bearing

2 Flutes

Tool No.		a	D	B	L	Ball Bearing
d=6mm	d=1/4"	degrees	mm	mm	mm	mm
SL00073	SL00074	7	6.3	8	48	B048024
SL00223	SL00224	22.5	12.7	12	48	B048024
SL00453	SL00454	45	14.3	6.3	48	B048024

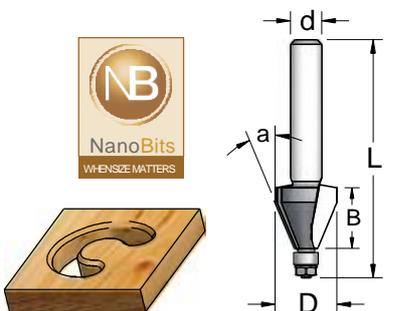


# SL2

## Bevel Trim bits - 2 Flutes

Tool No.		a	B	L	Ball Bearing	
d=6mm	d=1/4"	degrees	mm	mm		
MSL2223	MSL2224	22	m	45	B063032	
MSL2453	MSL2454	45	6	45	B080040	
SL21123	SL21124	SL21125	11.25	22	67	B127048
SL21503	SL21504	SL21505	15	6	51	B127048
SL21513	SL21514		15	16	60	B127048
SL22503	SL22504		25	6	51	B127048
SL22513	SL22514		25	10	51	B095048
SL24503	SL24504	SL24505	45	6	51	B127048
SL24513	SL24514	SL24515	45	11	51	B127048




Tool No.		a	B	L	Ball Bearing
d=12mm	d=1/2"	degrees	mm	m	Bearing
SL22252	SL22258	22.5	22	m	B127048
SL22512	SL22518	25	18	66	B127048
SL24512	SL24518	45	11	62	B127048
SL24532	SL24538	45	19	70	B127048
SL24542	SL24548	45	25	73	B127048
SL26002	SL26008	60	8	69	B127048

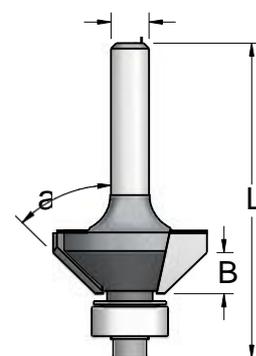

## Bevel Trim bits - 3 Flutes

For better surface finish and longer tool life.

Tool No.		a	B	L	Ball Bearing
d=6mm	d=1/4"	degrees	mm	mm	
SL30703	SL30704	7	10	51	B160050
SL31503	SL31504	15	10	51	B160050
SL32203	SL32204	22	10	51	B160050
SL33003	SL33004	30	10	51	B160050
SL34503	SL34504	45	11	51	B127048

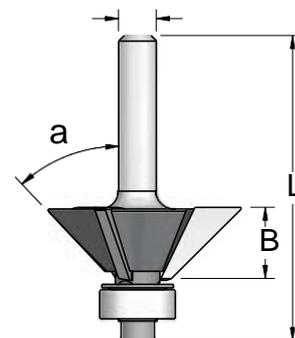

Tool No.		a	B	L	Ball
d=12mm	d=1/2"	degrees	mm	mm	Bearing
SL34502	SL34508	45	11	62	B127048





Produced with Harder K-Carbide whenever possible

# SL4

## Bevel Trim bit – 4 Flutes

For extra fine finish and longer tool life

Tool No.		a	B	L	Ball Bearing
d=12mm	d=1/2"	degrees	mm	mm	
SL44522	SL44528	45	14	67	B159063

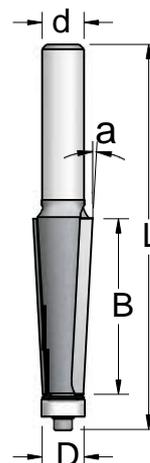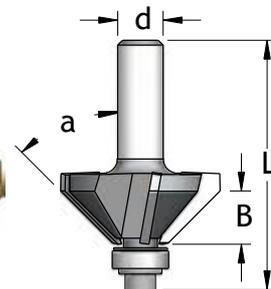


# SL

## 3° Patternmaker

For making wood vacuum-forming molds.

It can be used to bevel the leading edge on a door.

Tool No.		a	D	B	L	Ball Bearing
d=12mm	d=1/2"	degrees	mm	mm	mm	
SL20392	SL20398	3	12.7	54	117	B127048



# Rabbeting Bits

With Ball Bearing Guide.

Tools with 3 and 4 flutes are recommended, when a smooth finish is required and for hard materials.



## E2

### 2 Flutes

Tool No.		C	D	B	L	Ball Bearing
d=6mm	d=1/4"	mm	mm	mm	mm	
<b>NanoFlush Trimmers with Miniature Bearing</b>						
E200163	E200164	1.5	7.9	12	50	B048024
E200323	E200324	3.2	11.1	13	47	B048024





Tool No.		C	D	B	L	Ball Bearing	
d=6mm	d=1/4"	d=8mm	mm	mm	mm	mm	
E220503	E220504		4.8	22.2	12.5	49	B127048
E220953	E220954	E220955	9.5	31.8	12.5	51	B127048
E221113	E221114	E221115	11.1	31.8	12.5	51	B095048
E221273	E221274		12.7	35.0	12.5	51	B095048

Tool No.		C	D	B	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm	
E220952	E220958	9.5	31.8	12.5	59	B127048
E221112	E221118	11.1	31.8	12.5	59	B095048
E221272	E221278	12.7	35.0	12.5	59	B095048




## E3
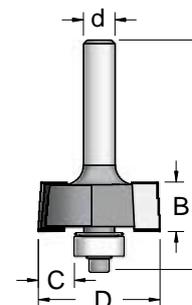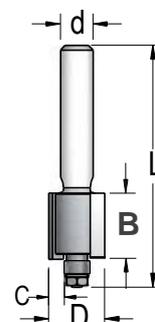
### 3 Flutes

For better surface finish and longer tool life.

Tool No.		C	D	B	L	Ball Bearing
d=6mm	d=1/4"	mm	mm	mm	mm	
E320323	E320324	3.2	19.0	12.5	51	B127048
E320503	E320504	4.8	22.2	12.5	49	B127048

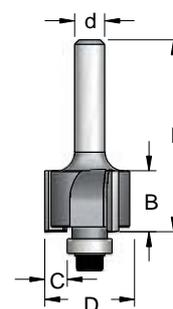

## E4


### 4 Flutes

For better surface finish and longer tool life.

Tool No.		C	D	B	L	Ball Bearing
d=6mm	d=1/4"	mm	mm	mm	mm	
E420953	E420954	9.5	31.8	12.5	49	B127048


Tool No.		C	D	B	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm	
E420952	E420958	9.5	31.8	12.5	59	B127048

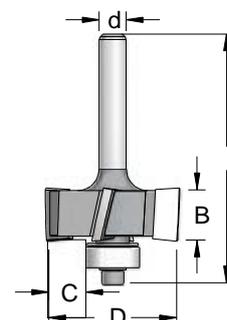

## E33

### Extra Large Rabbeting Bits - 3Flutes

Tool No.		C	D	B	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm	
E331502	E331508	15	52.0	19	77	B220060
E331652	E331658	16.5	52.0	19	77	B190060
E331852	E331858	18.5	52.0	19	77	B150060 x2
E332002	E332008	20	52.0	19	77	B120060 x2

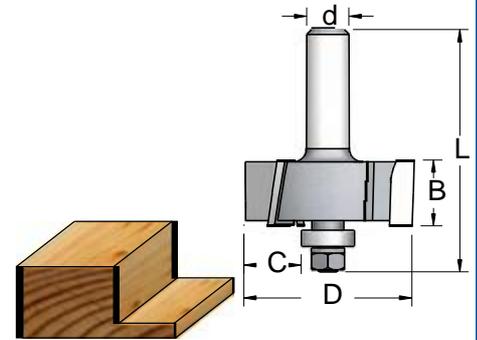



## EM

### Rabbeting bit with replaceable blades

Reduces set up time and cost effective.

Supplied with Torx key.

Tool No.		Flutes	C	D	B	L	Ball Bearing	Blade No.
d=8mm	d=12mm	d=1/2"	mm	mm	mm	mm		
EM21275/K		2	12.7	35.0	12	54	B095063	CM01212/K
EM21272/K EM21278/K		2	12.7	35.0	12	65	B095063	CM01212/K
EM42222/K EM42228/K		4	22.2	57.0	12	67	B127063	CM01212/K

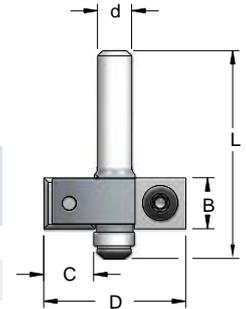



K- Can be ordered with Harder K-Carbide. While ordering, just add the letter "K" at the end of the Tool No.  
Replacement Torx Screw – BT40060

## ES

### Rabbeting Set - 2 flutes

4 Ball Bearing guides for different rabbets.

Tool No.		D	B	L	C	Ball Bearing
d=6mm	d=1/4"	mm	mm	mm	mm	
ES20003	ES20004	31.8	12.5	60	6.3	B190063
					8.0	B159063
					9.5	B127063
					11	B095063
	ES20005	31.8	12.5	60	6.3	B190048
					8.0	B160048
					9.5	B127048
					11	B095048

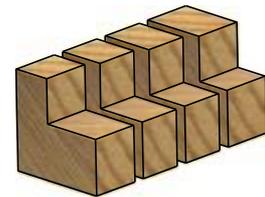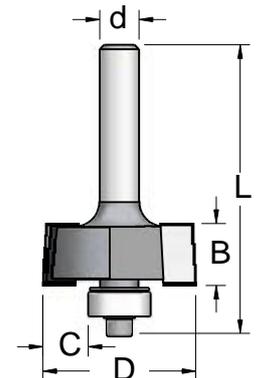

Tool No.		D	B	L	C	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm	
ES20002	ES20008	31.8	12.5	65	6.3	B190063
					8.0	B159063
					9.5	B127063
					11	B095063




# E4S

## Rabbeting Set - 4 flutes


5 Ball Bearing guides for different rabbets

Tool No.		D	B	L	C	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm	
					6.5	B220080
					8.0	B190063
E4S3502	E4S3508	35.0	24	79	9.5	B159063
					11.1	B127063
					12.7	B095063 x 2

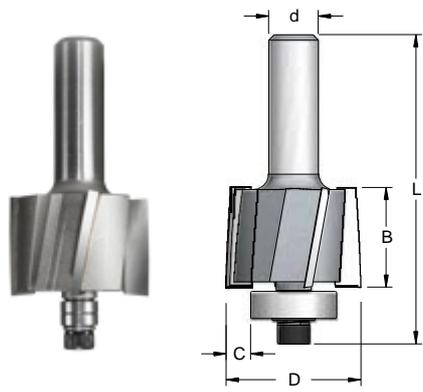

### Table for choosing the tool and ball bearing guide, according to the required rabbet (C)

Before ordering another tool, remember to check if you can achieve the new desired rabbet by changing the ball bearing.



Tool No.		Ball Bearing								
d=6mm	d=1/4"	d=8mm	c=1.6	c=3.2	c=4.8	c=6.3	c=7.9	c=9.5	c=11.1	c=12.7
E200163	E200164		B048024							
E200323	E200324			B048024						
E220503	E220504		B190048	B160048	B127048	B095048				
E220953	E220954	E220955				B190048	B160048	B127048	B095048	
E221273	E221274					B190048	B160048	B127048	B095048	
E320323	E320324		B160048	B127048	B095048					
E320503	E320504		B190048	B160048	B127048	B095048				
E420953	E420954					B190048	B160048	B127048	B095048	
	EM21275						B190063	B159063	B127063	B095063

Tool No.		Ball Bearing				
d=12mm	d=1/2"	c=6.3	c=7.9	c=9.5	c=11.1	c=12.7
E220952	E220958	B190048	B160048	B127048	B095048	
E221272	E221278		B190048	B160048	B127048	B095048
E420952	E420958	B190048	B160048	B127048	B095048	
EM21272	EM21278		B190063	B159063	B127063	B095063

## Binding/Rabbeting Set

Inlay Router Bits – Down Shear design with 3 flutes for clean cuts

**The ultimate guitar binding set! Designed especially for Luthiers.**

These sets include five different bearings that allow producing 10 different rabbets from just 1.0mm rabbet up to 5.5mm (in 0.5mm increments). Extended gap between the cutter and the bearing for safely routing multiple passes.

### E3SG

#### 3 Flutes

Tool No.		D	B	L	C	Ball Bearing
d=6mm	d=1/4"	mm	mm	mm		
E3SG153	E3SG154	15.0	11.5	53	1.0	B130040
					1.5	B120040
					2.0	B110040
					2.5	B100040
					3.0	B090040
E3SG203	E3SG204	20.0	13.5	53	3.5	B130040
					4.0	B120040
					4.5	B110040
					5.0	B100040
					5.5	B090040



## PANEL PILOT BITS


Carbide Tipped with hardened pilot and boring point. Panel Pilot Bits are designed for fast cut out work, using a template. Widely used in the caravan industry.

### PPC

#### Single Concave Flute

For better chip flow and longer tool life.


Tool No.		D	B	L
d=6mm	d=1/4"	mm	mm	mm
PPC0633	PPC0634	6.3	19	63
	PPC0956	9.5	25	79
	PPC1272	12.7	30	89

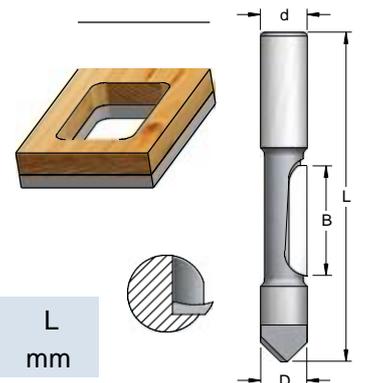

### PP

#### Single Flute


Tool No.		D	B	L
d=6mm	d=1/4"	mm	mm	mm
PP30633	PP30634	6.3	19	63
	PP40956	9.5	25	79
	PP51272	12.7	30	89
	PP81272	12.7	51	120
	PP81602	16.0	51	120

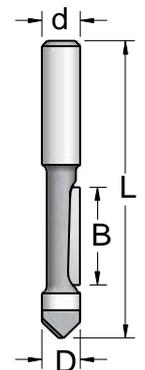

### PP2

#### Double Flute

Tool No.		D	B	L
d=6mm	d=1/4"	mm	mm	mm
PP20633	PP20634	6.3	19	63
	PP20956	9.5	25	79
	PP21272	12.7	30	89
	PP28122	12.7	51	120

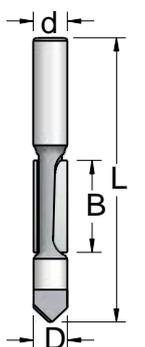


# SOLID CARBIDE BITS – SINGLE FLUTE

Classic design for mass production.  
Integrated Pilot (without ball bearing).

## SCF

Flush Trim Laminate bits

Tool No.		D	B	L
d=6mm	d=1/4"	mm	mm	mm
SCF1633		6.0	6	38
	SCF1634	6.35	6	38
SCF2633		6.0	9.5	38
	SCF2634	6.35	9.5	38

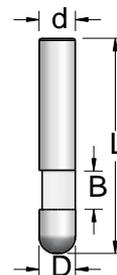


## SCF...W

Double Ended Flush Trim Laminate bits.

Cost Effective.


Tool No.	D	B	L
d=1/4"	mm	mm	mm
SCF1634W	6.35	6	51

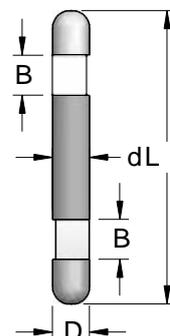

## SCSL

Bevel Trim Laminate bits 7°

Tool No.		D	B	L
d=6mm	d=1/4"	mm	mm	mm
SCSL073	SCSL074	4.8	6	38

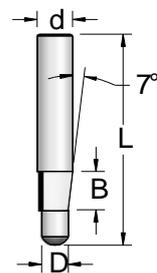


## SCSL...W

Double Ended Bevel Trim Laminate bits 7°

Cost Effective.


Tool No.	D	B	L
d=1/4"	mm	mm	mm
SCSL074W	4.8	6	51

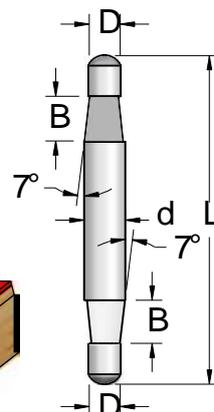

## SCPP

Boring & Flush Trimmer

Tool No.		D	B	L
d=6mm	d=1/4"	mm	mm	mm
SCPP633		6.0	6.5	40
	SCPP634	6.35	6.5	38

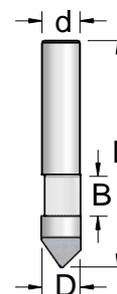


## SCRB

### Veining Bits

Solid Carbide, Single Flute

Tool No.		R	D	B	L
d=6mm	d=1/4"	mm	mm	mm	mm
SCRB323	SCRB324	1.6	3.2	5	38
SCRB483	SCRB484	2.4	4.8	6.5	38
	SCRB634	3.2	6.35	9	38

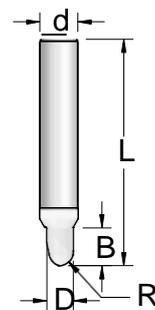


## SCV

### "V" Grooving Veining Bits

Solid Carbide, Single Flute

Tool No.		a	D	B	L
d=6mm	d=1/4"	degrees	mm	mm	mm
SCV6003		60	6.0	12	40
	SCV6004	60	6.35	12	38
SCV9003		90	6.0	9.5	40
	SCV9004	90	6.35	9.5	38

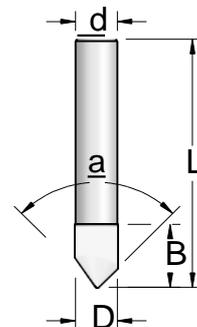


## SE

### Engraving Bits with Mirror Finish Carbide

For sign making and PCB milling. Used with CNC and industrial engraving machines for wood, plastic, brass, aluminum, copper and different composites.

Solid Carbide, Single Flute

Tool No.			a	D1	B	L
d=3mm	d=6mm	d=1/4"	degree	mm	mm	mm
			s			
SE300130			30	0.1	11	40
m						
SE450130			45	0.1	11	40
m						
SE600130			60	0.1	11	40
m						
SE900130			90	0.1	11	40
m						
	SE300160m		30	0.1	14	40
	SE30013		30	0.1	14	50
	SE30023		30	0.25	14	50
	SE30053		30	0.5	14	50
	SE30103		30	1.0	14	50
	SE450160m		45	0.1	14	40
	SE600160m		60	0.1	14	40
	SE900160m		90	0.1	14	40
		SE30014X	30	0.1	14	58
		SE30024X	30	0.25	14	58
		SE30054X	30	0.5	14	58
		SE30084X	30	0.75	14	58
		SE30104X	30	1.0	14	58
		SE30154X	30	1.5	14	58
		SE30254X	30	2.5	14	58

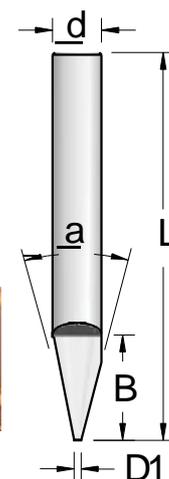

# Carbide Tipped "V" Grooving Bits

## V



### "V" - Grooving Bits

For General Woodworking

d=6mm	Tool No. d=1/4"	d=8mm	a degree s	D mm	B mm	L mm
MV60953	MV60954		60	9.5	10	41
V601273	V601274	V601275	60	12.7	16	45
V900953	V900954	V900955	90	9.5	11	43
V901273	V901274	V901275	90	12.7	12	44
V901603	V901604		90	16.0	13	41
		V901605	90	16.0	13	45
V901903	V901904		90	19.0	16	45
		V901905	90	19.0	16	48
V902503	V902504		90	25.4	19	48
		V902505	90	25.4	19	51
V903203	V903204		90	31.8	25	55
V100323	V100324		100	31.8	21	53
V110323	V110324		110	31.8	20	51
V120323	V120324		120	31.8	18	48
V130323	V130324		130	31.8	12	45
V140323	V140324		140	31.8	12	43
V150323	V150324		150	31.8	12	42

Tool No. d=12mm	d=1/2"	a degree s	D mm	B mm	L mm
V901272	V901278	90	12.7	12	55
V901602	V901608	90	16.0	13	51
V901902	V901908	90	19.0	16	54
V902502	V902508	90	25.4	19	57
V903202	V903208	90	31.8	25	63
V903802	V903808	90	38.1	32	70
V100322	V100328	100	31.8	21	70
V110322	V110328	110	31.8	20	70
V120322	V120328	120	31.8	18	70
V150322	V150328	150	31.8	12	70

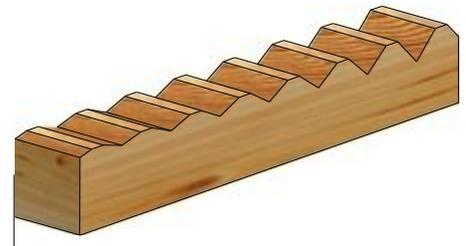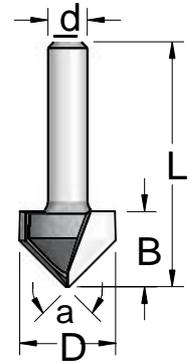

## VE


### "V"-Grooving for Shaping Panels

Designed for folding and shaping Aluminum Composite cladding Materials Such as Alucobond, Dibond etc. Routing V-shaped grooves into the aluminum cover and part of the polyethylene core, allows folding the remaining material by hand.

d=6mm	Tool No. d=1/4"	d=8mm	a degrees	b degrees	D mm	D1 mm	B mm	L mm
VE90123	VE90124		90	90	13.0	3	12.5	57
		VE90125	90	90	13.0	2.4	12.5	57
VE13503	VE13504	VE13505	135	45	18.0	2	15.5	57

Tool No. d=12mm	d=1/2"	a degrees	b degrees	D mm	D1 mm	B mm	L mm
VE13512	VE13518	135	45	19.0	2	9.5	63

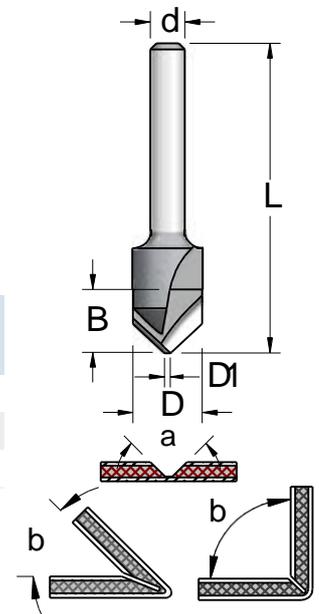


# VG

## Gypsum plasterboard "V" grooving bits

Cuts grooves for folding. The plasterboard cover is not cut through, allowing the corner to be folded.

Tool No.		a	D	B	L	
d=6mm	d=1/4"	d=8mm	degrees	mm	mm	
VG90273	VG90274	VG90275	90	26.0	12.7	50



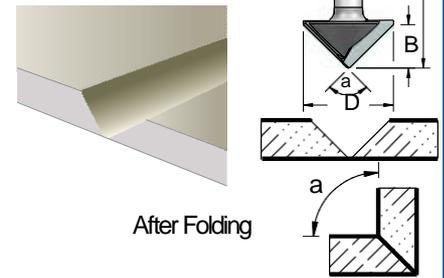


# Z

## Dovetail Bits

Tool No.		a	D	B	L	
d=6mm	d=1/4"	d=8mm	degrees	mm	mm	
Z100903	Z100904	Z100905	9	9.5	9.5	41
Z131403	Z131404	Z131405	14	12.7	12.5	49



Tool No.		a	D	B	L
d=12mm	d=1/2"	degrees	mm	mm	mm
Z072202	Z072208	7	22.0	22	60
Z100902	Z100908	9	9.5	9.5	54
Z131402	Z131408	14	12.7	12.5	54
Z142542	Z142548	14	25.4	25	69.5

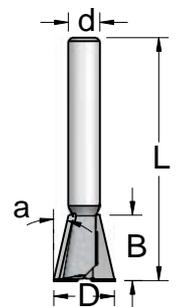

# Z

## Dovetail Bits, with relieving teeth

Tool No.		a	D	B	L
d=6mm	d=1/4"	degrees	mm	mm	mm
Z141403	Z141404	14	12.7	13	49

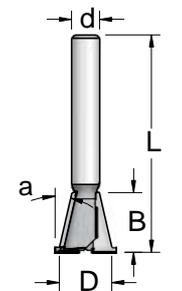



# ZB

## Brookman Dovetail Bits

For Brookman Machines


Tool No.	a	D	B	L
	degrees	mm	mm	mm
ZB13146	10	14.3	12.7	38

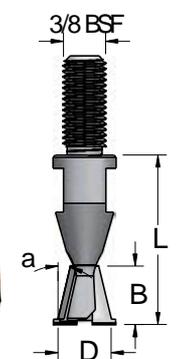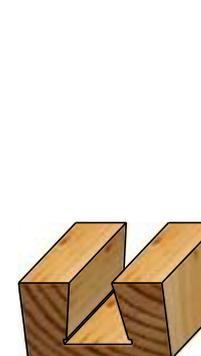

**RU**


## Panel and Veining Bits

Tool No.		R	D	D1	B	L
d=6mm	d=1/4"	mm	mm	mm	mm	mm
Solid Carbide Single Flute						
	SCRU084	0.8	2.8	0.5	4.8	57
	SCRU164	1.6	4.0	0.5	5.5	57
	SCRU244	2.4	5.0	0.5	6.3	57
	SCRU324	3.2	6.3	0.5	7	51
Carbide Tipped 2 Flutes						
RU05003	RU05004	4.8	9.5	0.7	9	51
RU06003	RU06004	6.2	13.0	0.7	13	51
RU07003	RU07004	7.5	14.5	0.7	15	55
RU09003	RU09004	9.5	19.0	1.1	18	51
Tool No.		R	D	D1	B	L
d=12mm	d=1/2"	mm	mm	mm	mm	mm
RU05002	RU05008	4.8	9.5	0.7	9	54
RU09002	RU09008	9.5	19.0	1.1	18	57

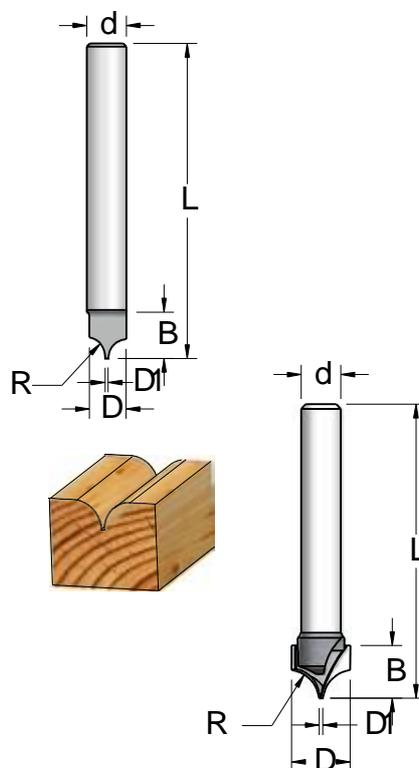
**RB**

## Classical Core Box bits

Tool No.		R	D	B	L	
d=6mm	d=1/4"	d=8mm	mm	mm	mm	
RB06003	RB06004	RB06005	3.2	6.3	5.5	42
RB08003	RB08004	RB08005	4.0	8.0	6	38
RB10003	RB10004		4.8	9.5	6	38
		RB10005	4.8	9.5	6	42
RB12003	RB12004	RB12005	6.3	12.7	9	41
RB16003	RB16004	RB16005	8.0	16.0	9.5	43
RB19003	RB19004	RB19005	9.5	19.0	11	44
RB22003	RB22004		11.1	22.2	14	46
		RB22005	11.1	22.2	14	43
RB25003	RB25004		12.7	25.4	16	48
		RB25005	12.7	25.4	16	50
Tool No.		R	D	B	L	
d=12mm	d=1/2"	mm	mm	mm	mm	
RB10002	RB10008	4.8	9.5	6	51	
RB12002	RB12008	6.3	12.7	9	54	
RB16002	RB16008	8.0	16.0	9.5	51	
RB19002	RB19008	9.5	19.0	11	52	
RB22002	RB22008	11.1	22.2	14	57	
RB25002	RB25008	12.7	25.4	16	60	

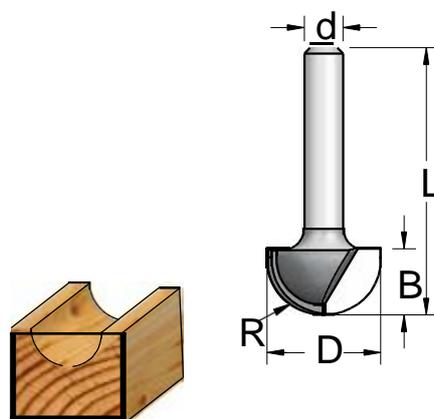


## DB

## Core Box Template Bits

With Ball Bearing Guide.

To No.	R	D	B	L	Ball Bearing	Retaining Collar
DB16003	8.0	16.0	9	52	B159063	PF06300
DB19003	9.5	19.0	11	53	B190063	PF06300

Tool No.	R	D	B	L	Ball Bearing	Retaining Collar
DB19002	9.5	19.0	11	83	B190127 x2	PF19000
DB25002	12.7	25.4	16	83	B254127	PF19000

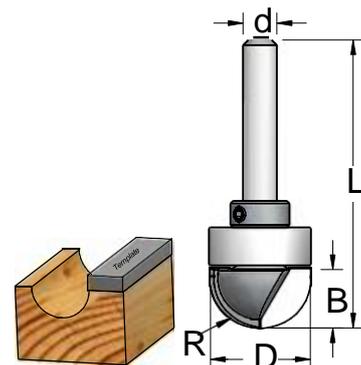


## RBL

## Core Box Bits - Extra Deep

Tool No.	R	D	B	L
RBL0323	1.6	3.2	9.5	44
RBL0483	2.4	4.8	13	47
RBL0633	3.2	6.3	13	47
RBL0803	4.0	8.0	13	47
RBL0805	4.0	8.0	13	50

Tool No.	R	D	B	L
RBL1002	4.8	9.5	25	70
RBL1272	6.3	12.7	32	73
RBL1402	7.1	14.2	32	73
RBL1602	7.9	16.0	32	70
RBL1902	9.5	19.0	32	70
RBL2202	11.1	22.2	32	70
RBL2502	12.7	25.4	32	70

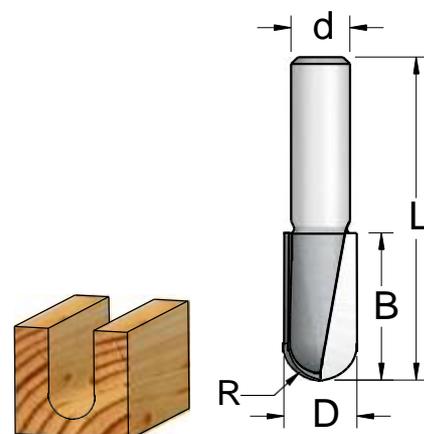


## RV

## Plunging Rounding Over Bits

Tool No.	R	D	D1	B	B1	L
RV06003	6.3	19.0	6.3	13	9.5	41
RV08003	8.0	22.2	6.3	14	11.1	43
RV10003	9.5	25.4	6.3	16	12.7	44
RV12005	12.7	35.0	9.5	25	19.0	57

Tool No.	R	D	D1	B	B1	L
RV06002	6.3	19.0	6.3	13	9.5	51
RV08002	8.0	22.2	6.3	14	11.1	52
RV10002	9.5	25.4	6.3	16	12.7	54
RV12002	12.7	35.0	9.5	25	19.0	63
RV16002	16.0	44.5	12.7	32	25.4	70
RV19002	19.0	50.8	12.7	38	28.6	75

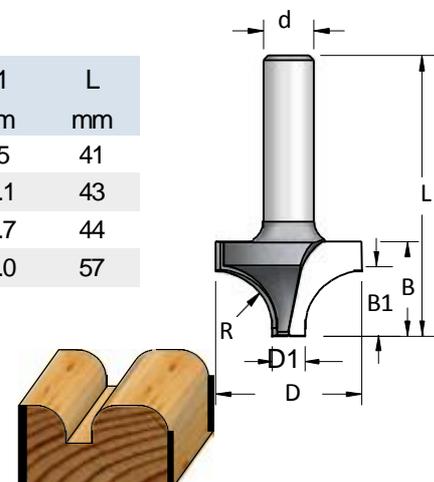



## RH

## Plunging Beading &amp; Rounding Over Bits

Tool No.		R=B1	D	D1	B	L
d=6mm	d=1/4"	mm	mm	mm	mm	mm
RH03003	RH03004	3.2	9.5	3.3	7	48
RH05003	RH05004	4.8	13.5	4.0	9.5	41
RH06003	RH06004	6.3	17.5	4.8	13	44
RH08003	RH08004	8.0	22.2	6.3	14	46
RH10003	RH10004	9.5	25.4	6.3	16	46
RH12003	RH12004	12.7	31.8	6.3	17	49

Tool No.		R=B1	D	D1	B	L
d=12mm	d=1/2"	mm	mm	mm	mm	mm
RH06002	RH06008	6.3	17.5	4.8	13	54
RH08002	RH08008	8.0	22.2	6.3	14	56
RH10002	RH10008	9.5	25.4	6.3	16	56
RH12002	RH12008	12.7	31.8	6.3	17	59

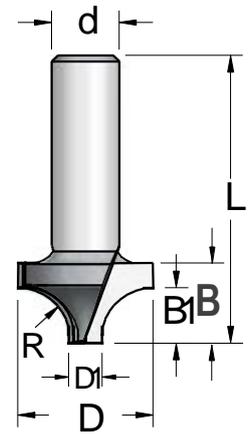


## RC

## Plunging Classical Bits

Tool No.		R	R1	D	B	L	
d=6mm	d=1/4"	d=8mm	mm	mm	mm	mm	
MRC0303	MRC0304		4.0	3.2	12.7	8	38
RC03003	RC03004	RC03005	2.4	3.5	12.7	9	51
RC05003	RC05004	RC05005	3.6	5.0	19.0	13	52

Tool No.		R	R1	D	B	L
d=12mm	d=1/2"	mm	mm	mm	mm	mm
RC05002	RC05008	3.6	5.0	19.0	13	69
RC06002	RC06008	5.0	6.3	25.4	16	73
RC10002	RC10008	7.0	10.0	35.0	15	65

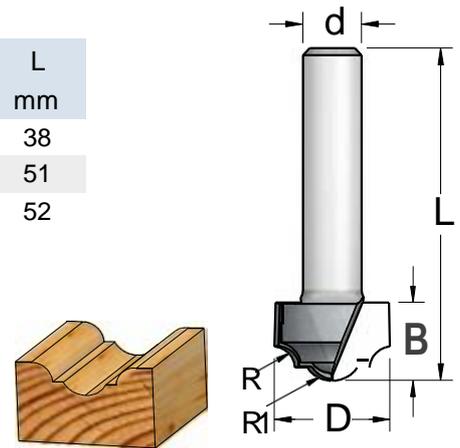

## DC



## Classical Template Bits

With Ball Bearing Guide.

Tool No.		R	R1	D	B	L	Ball Bearing	Retaining Collar	
d=6mm	d=1/4"	d=8mm	mm	mm	mm	mm	mm	mm	
DC03003	DC03004		2.4	3.5	12.7	9	51	B127063	PF06300
DC05003	DC05004	DC05005	3.6	5.0	19.0	13	58	B190080	PF08000



Tool No.		R	R1	D	B	L	Ball Bearing	Retaining Collar
d=12mm	d=1/2"	mm	mm	mm	mm	mm	mm	mm
DC06002	DC06008	3.2	3.2	25.4	16	73	B254127	PF19000
DC10002	DC10008	3.2	5.0	35.0	15	73	B350150	PF12700

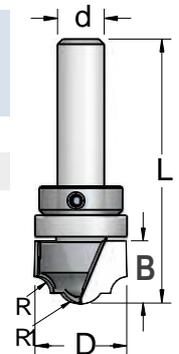

**DM****Panelling Flat Bottom Groover**


With Ball Bearing Guide.

Tool No.		R=R1	D	D1	B	L	Ball Bearing	Retaining Collar
d=12mm	d=1/2"	mm	mm	mm	mm	mm		
DM35002	DM35008	5.5	35.0	12.7	14	66	B350150	PF12700

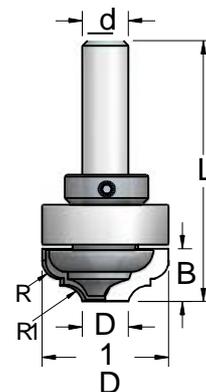**RA, RRA****Ogee Bits**


Tool No.		R=R1	D	D1	B	L	
d=6mm	d=1/4"	d=8mm	mm	mm	mm	mm	
RA20003	RA20004	2	12.7	4.7	8	51	
	RA20005	2	12.7	4.7	8	54	
RA30003	RA30004	RA30005	3.2	19.0	6.4	13	54
RRA2503	RRA2504	RRA2505	3.2	25.4	10.0	9.5	50

Tool No.		R=R1	D	D1	B	L
d=12mm	d=1/2"	mm	mm	mm	mm	mm
RA30002	RA30008	3.2	19.0	6.4	13	64
RRA2502	RRA2508	3.2	25.4	10.0	9.5	60
RRA3502	RRA3508	3.2	35.0	12.7	9.5	59

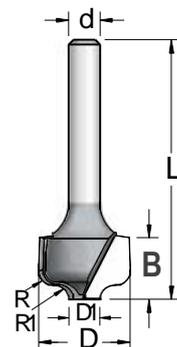**RRC****Plunge Ogee Bits**



Tool No.		R	R1	D	B	L	
d=6mm	d=1/4"	d=8mm	mm	mm	mm	mm	
MRR1203	MRR1204	MRR1205	3	3	12.7	8	38

Tool No.		R	R1	D	B	L
d=12mm	d=1/2"	mm	mm	mm	mm	mm
RRC2702	RRC2708	6	5	27.0	12	57

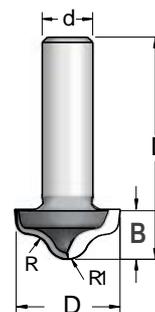**RR****Plunging Double Rounding Over Bits**

Tool No.		R	D	D1	B	L
d=6mm	d=1/4"	mm	mm	mm	mm	mm
RR42543	RR42544	4.5	25.4	10.0	16	44

Tool No.		R	D	D1	B	L
d=12mm	d=1/2"	mm	mm	mm	mm	mm
RR42542	RR42548	4.5	25.4	10.0	16	67

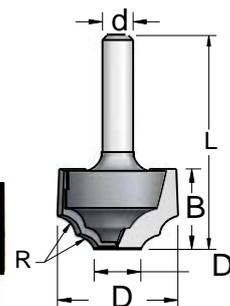


## DL

## Plunging Classical Template Bits

With Ball Bearing Guide

Tool No.		R	D	D1	B	L	Ball Bearing	Retaining Collar
d=6mm	d=1/4"	mm	mm	mm	mm	mm		
DL42543	DL42544	4.5	25.4	10.0	16	61	B260100	PF06300
Tool No.		R	D	D1	B	L	Ball Bearing	Retaining Collar
d=12mm	d=1/2"	mm	mm	mm	mm	mm		
DL42542	DL42548	4.5	25.4	10.0	16	67	B254127	PF19000

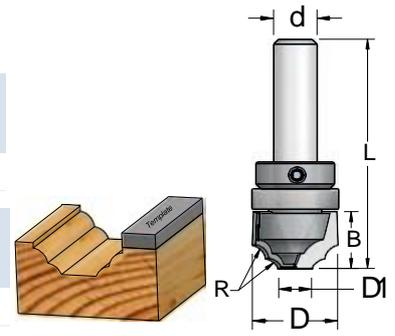


## RR

## Plunging Classical Bit Shallow Groove

With Carbide Plunging Tip.


Tool No.		D	D1	B	L
d=12mm	d=1/2"	mm	mm	mm	mm
RR32002	RR32008	31.8	12.5	11	61

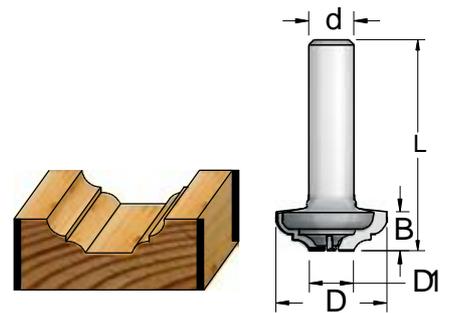

## RRI

## Plunging Classical Bit Shallow Groove

Tool No.		R	D	B	L
d=12mm	d=1/2"	mm	mm	mm	mm
RRI0502	RRI0508	9.0	36.5	9.5	61

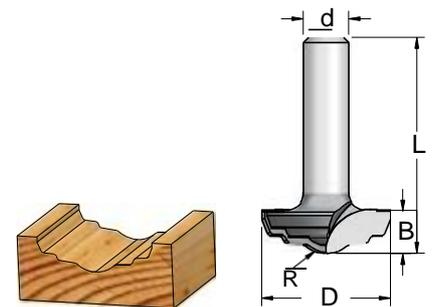


## MM

## Key Hole Bits - Single Flute

For "Key Hole" slots in picture frames.


Tool No.		D	D1	B	B1	L	
d=6mm	d=1/4"	d=8mm	mm	mm	mm	mm	
MM10953	MM10954	MM10955	9.5	4.8	9.5	4.8	40
MM12953	MM12954	MM12955	12.7	8.0	9.5	4.8	38

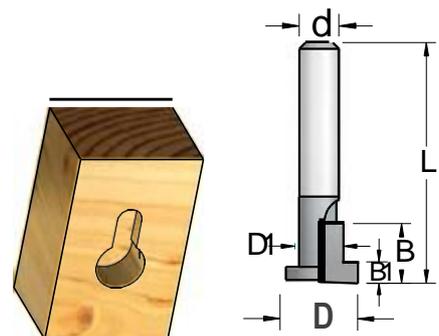

## MM

## T-Slot Bits

Tool No.		D	D1	B	B1	L
d=12mm	d=1/2"	mm	mm	mm	mm	mm
MM28202	MM28208	28.0	9.5	20.7	8	60
MM35222	MM35228	35.0	12.7	22.2	9.5	65

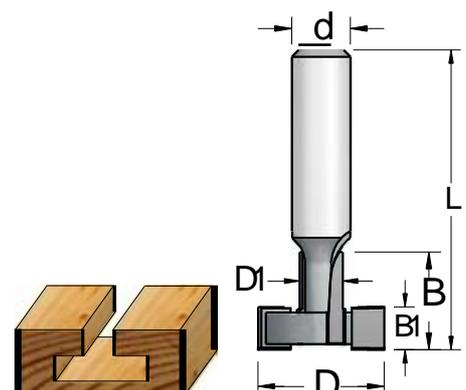


## RS

## Roman Ogee Stepped Bits

With Ball Bearing Guide.

d=6mm	Tool No.		R	D	B	L	Ball Bearing
	d=1/4"	d=8mm	mm	mm	mm	mm	
MRS0303	MRS0304		3.0	20.0	10	47	B080040
RS04003	RS04004	RS04005	4.0	25.4	14.5	53	B095048
RS06003	RS06004	RS06005	6.3	35.0	19	59	B095048

Tool No.		R	D	B	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm	
RS04002	RS04008	4.0	25.4	14.5	63	B095048
RS06002	RS06008	6.3	35.0	19	69	B095048

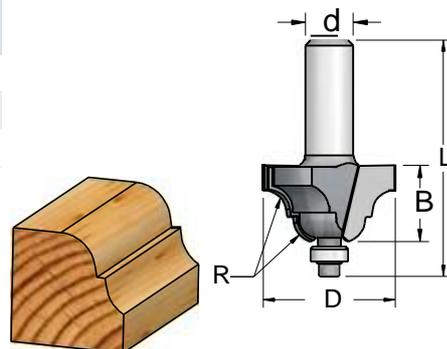


## RD


## Roman Ogee Bits

With Ball Bearing Guide.

Tool No.		R	D	B	L	Ball Bearing
d=6mm	d=1/4"	mm	mm	mm	mm	
<b>NanoOgee Bits with Miniature Bearing</b>						
RD00253	RD00254	2.4	14.3	8	47	B048024

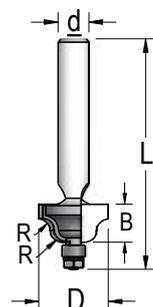

d=6mm	Tool No.		R	D	B	L	Ball Bearing
	d=1/4"	d=8mm	mm	mm	mm	mm	
MRD0303	MRD0304		3.0	20.0	10	47	B080040
RD04003	RD04004		4.0	25.4	14.5	53	B095032
		RD04005	4.0	25.4	14.5	53	B095048
RD06003	RD06004	RD06005	6.3	35.0	19	59	B095032

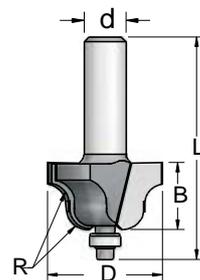

Tool No.		R	D	B	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm	
RD04002	RD04008	4.0	25.4	14.5	63	B095032
RD06002	RD06008	6.3	35.0	19	69	B095032



## RJ

## Wavy Edge Bits

With Ball Bearing Guide.

Tool No.		R	D	B	L	Ball Bearing
d=6mm	d=1/4"	mm	mm	mm	mm	
MRJ0303	MRJ0304	2.5	20.0	10	47	B080040

Tool No.		R	D	B	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm	
RJ04002	RJ04008	4.0	31.8	17.5	71	B127048

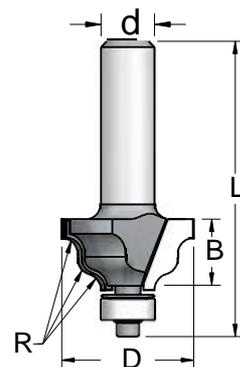


# RT

## Ogee Bits

With Ball Bearing Guide.

d=6mm	Tool No.		R	R1	D	B	L	Ball Bearing
	d=1/4"	d=8mm	mm	mm	mm	mm	mm	
RT06003	RT06004	RT06005	6	5	35.0	17	58	B127048

Tool No.		R	R1	D	B	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm	mm	
RT06002	RT06008	6	5	35.0	17	68	B127048

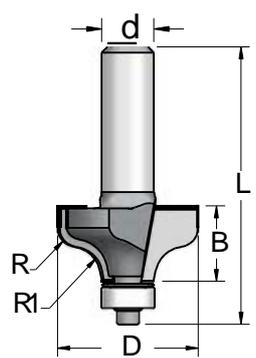



# RM

## Classical Cove and Bead Bits

With Ball Bearing Guide

d=6mm	Tool No.		R	R1	D	B	L	Ball Bearing
	d=1/4"	d=8mm	mm	mm	mm	mm	mm	
MRM0303	MRM0304		3.0	3.0	20.0	10	47	B080040
RM04003	RM04004	RM04005	4.0	4.0	28.6	13	53	B127048
RM06003	RM06004		6.3	5.0	35.0	17	58	B127048

Tool No.		R	R1	D	B	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm	mm	
RM04002	RM04008	4.0	4.0	28.6	13	65	B127048
RM06002	RM06008	6.3	5.0	35.0	17	71	B127048

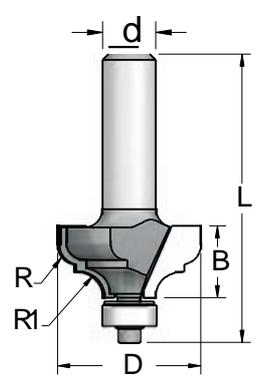


# RZ

## Cove Bits

With Ball Bearing Guide

d=6mm	Tool No.		R	D	B	L	Ball Bearing
	d=1/4"	d=8mm	mm	mm	mm	mm	
MRZ0303	MRZ0304		3.0	14.0	10	47	B080040
M07RZ63	M07RZ64		6.0	20.0	10	47	B080040
RZ06003	RZ06004		6.3	22.2	12	52	B095032
RZ08003	RZ08004	RZ08005	8.0	25.4	12	51	B095032
RZ10003	RZ10004	RZ10005	9.5	28.6	14	55	B095032
RZ12003	RZ12004	RZ12005	12.7	35.0	16	57	B095032

Tool No.		R	D	B	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm	
RZ06002	RZ06008	6.3	22.2	12	64	B095032
RZ08002	RZ08008	8.0	25.4	12	63	B095032
RZ10002	RZ10008	9.5	28.6	14	65	B095032
RZ12002	RZ12008	12.7	35.0	16	66	B095032

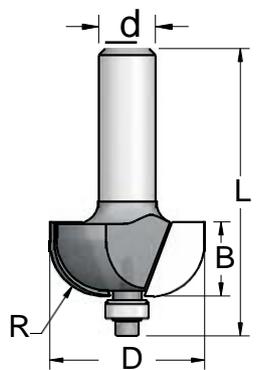


# RN

## Classical Bits

With Ball Bearing Guide

d=6mm	Tool No.		R	R1	D	B	L	Ball Bearing
	d=1/4"	d=8mm	mm	mm	mm	mm	mm	
RN03003	RN03004	RN03005	5.0	6.0	31.8	13	52	B127048
RN04003	RN04004	RN04005	6.5	8.5	38.1	16	56	B127048

d=12mm	Tool No.		R	R1	D	B	L	Ball Bearing
	d=1/2"		mm	mm	mm	mm	mm	
RN03002	RN03008		5.0	6.0	31.8	13	62	B127048
RN04002	RN04008		6.5	8.5	38.1	16	68	B127048

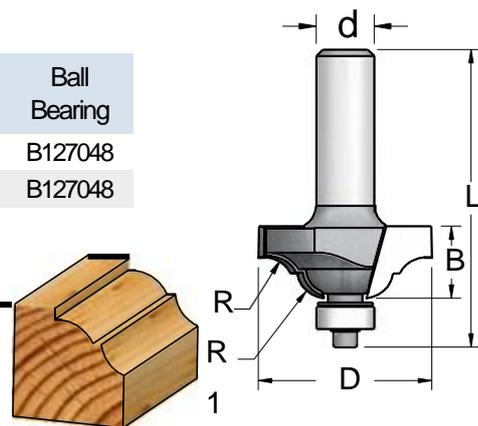



# RL

## Double Rounding Over Bits

With Ball Bearing Guide

d=6mm	Tool No.		R	D	B	L	Ball Bearing
	d=1/4"	d=8mm	mm	mm	mm	mm	
RL04003	RL04004	RL04005	4.0	28.6	13	52	B127048
RL06003	RL06004	RL06005	5.5	35.0	17	58	B127048

d=12mm	Tool No.		R	D	B	L	Ball Bearing
	d=1/2"		mm	mm	mm	mm	
RL04002	RL04008		4.0	28.6	13	63	B127048
RL06002	RL06008		5.5	35.0	17	68	B127048

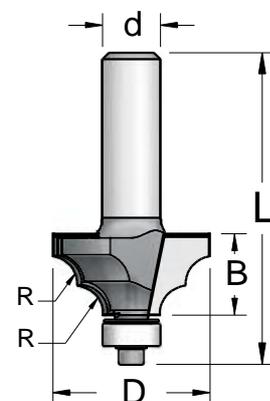



# RP

## Beading Bits

With Ball Bearing Guide.

d=6mm	Tool No.		R	D	D1	B	L	Ball Bearing
	d=1/4"	d=8mm	mm	mm	mm	mm	mm	
RP05003	RP05004	RP05005	4.8	22.2	12.7	11	50	B095048
RP06003	RP06004	RP06005	6.3	25.4	12.7	11	50	B095048
RP10003	RP10004	RP10005	9.5	31.8	12.7	16	54	B095048
RP12003	RP12004	RP12005	12.7	38.1	12.7	18	59	B095048


d=12mm	Tool No.		R	D	D1	B	L	Ball Bearing
	d=1/2"		mm	mm	mm	mm	mm	
RP06002	RP06008		6.3	25.4	12.7	11	61	B095048
RP10002	RP10008		9.5	31.8	12.7	16	68	B095048
RP12002	RP12008		12.7	38.1	12.7	18	68	B095048
RP16002	RP16008		16.0	44.5	12.7	22	76	B095048
RP19002	RP19008		19.0	50.8	12.7	25	78	B095048

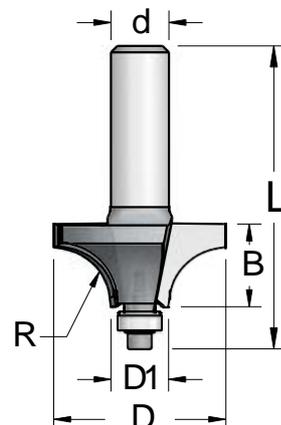



**RW****Rounding Over Bits**

Extended line for wide range of applications.  
Smaller bearings allow working in tight spaces.

Tool No.		R	D	D1	B	L	Ball Bearing
d=6mm	d=1/4"	mm	mm	mm	mm	mm	
<b>Nano Rounding Over Bits</b>							
RW00163	RW00164	1.6	8	4.8	8	47	B048024
RW00243	RW00244	2.4	9.5	4.8	9.5	47	B048024
RW00323	RW00324	3.2	11.1	4.8	9.5	47	B048024
RW00403	RW00404	4.0	12.7	4.8	9.5	47	B048024
RW00483	RW00484	4.8	14.3	4.8	8.5	47	B048024
RW00633	RW00634	6.3	17.4	4.8	10	47	B048024

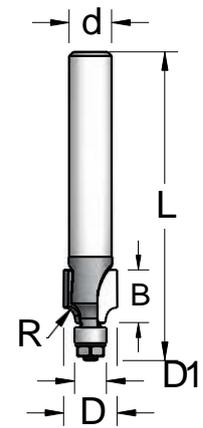

Tool No.		R	D	D1	B	L	Ball Bearing
d=6mm	d=1/4"	d=8mm	mm	mm	mm	mm	
RW60603	RW60604		6.3	19.0	6.3	6.8	B063032
RW61003	RW61004		9.5	25.4	6.3	10	B063032
MRW0303	MRW0304		3.0	14.2	8.0	11	B080040
M12RW63	M12RW64		6.0	21.0	8.0	10	B080040
RW90603	RW90604		6.3	22.2	9.5	7	B095032
RW91003	RW91004		9.5	28.6	9.5	10	B095032
RW01603	RW01604	RW01605	1.6	15.9	12.7	8	B127048
RW02003	RW02004	RW02005	2.0	16.7	12.7	8	B127048
RW03003	RW03004	RW03005	3.2	19.0	12.7	9.5	B127048
RW04003	RW04004	RW04005	4.0	20.6	12.7	9.5	B127048
RW05003	RW05004	RW05005	4.8	22.2	12.7	11	B127048
RW06003	RW06004	RW06005	6.3	25.4	12.7	11	B127048
RW08003	RW08004	RW08005	8.0	28.6	12.7	13.5	B127048
RW10003	RW10004	RW10005	9.5	31.8	12.7	16	B127048
RW12003	RW12004	RW12005	12.7	38.1	12.7	18	B127048
		RW15005	15.0	42.5	12.7	22	B127048

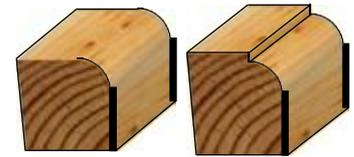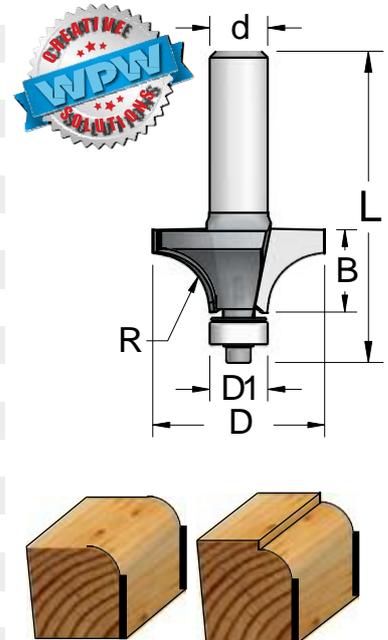

Tool No.		R	D	D1	B	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm	mm	
RW03002	RW03008	3.2	19.0	12.7	9.5	61	B127048
RW04002	RW04008	4.0	20.6	12.7	9.5	59	B127048
RW05002	RW05008	4.8	22.2	12.7	11	62	B127048
RW06002	RW06008	6.3	25.4	12.7	11	61	B127048
RW08002	RW08008	8.0	28.6	12.7	13.5	67	B127048
RW10002	RW10008	9.5	31.8	12.7	16	68	B127048
RW12002	RW12008	12.7	38.1	12.7	18	68	B127048
RW16002	RW16008	16.0	44.5	12.7	22	76	B127048
RW19002	RW19008	19.0	50.8	12.7	25	78	B127048
RW22002	RW22008	22.2	57.1	12.7	30	79	B127048
RW25002	RW25008	25.4	63.5	12.7	32	85	B127048
*RW32002	*RW32008	31.8	76.3	12.7	38	98	B127048
**RW38002	**RW38008	38.1	88.9	12.7	44	105	B127048

\*Max speed 10000 RPM  
\*\*Max speed 16000 RPM

## RWG

### 4 Flutes Rounding Over Bits


With Ball Bearing Guide.

For better surface finish and longer tool life.



Too No. l d=6mm	d=1/4"	R mm	D mm	D1 mm	B mm	L mm	Ball Bearin g
RWG0303	RWG0304	3.2	22.2	15.9	9.5	49	B160048
RWG0503	RWG0504	4.8	25.4	15.9	11	49	B160048
RWG0603	RWG0604	6.3	28.6	15.9	11	51	B159063
RWG1003	RWG1004	9.5	35.0	15.9	16	53	B159063
RWG1203	RWG1204	12.7	41.3	15.9	18	58	B159063

Tool No. d=12mm	d=1/2"	R mm	D mm	D1 mm	B mm	L mm	Ball Bearing
RWG0502	RWG0508	4.8	25.4	15.9	11	62	B160048
RWG0602	RWG0608	6.3	28.6	15.9	11	63	B159063
RWG1002	RWG1008	9.5	35.0	15.9	16	66	B159063
RWG1202	RWG1208	12.7	41.3	15.9	18	68	B159063

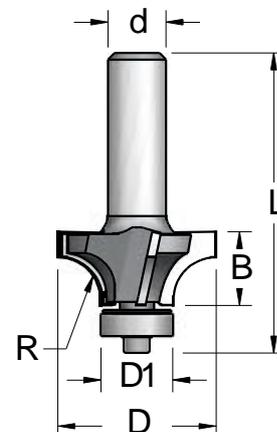

## RWB


### Laminate Rounding Over Bits

With 2 Ball Bearing Guides for added stability

Used especially for smoothing sharp corners of edge banded laminates.

Special design to avoid damaging the panel while doing this delicate job.

Tool No. d=6mm	d=1/4"	d=8mm	R mm	D mm	D1 mm	B mm	L mm	Ball Bearing
RWB0133	RWB0134	RWB0135	1.3	16.5	12.7	8	57	B127048x2
RWB0203	RWB0204	RWB0205	2.0	18	12.7	8	57	B127048x2
RWB0303	RWB0304	RWB0305	3.0	20	12.7	9.5	59	B127048x2

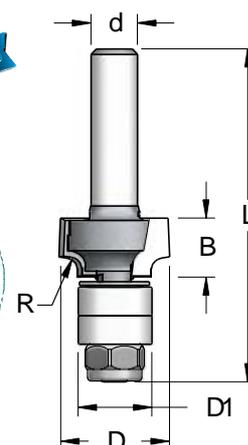


## RF

### Bull Nose Bits

Tool No. d=6mm	d=1/4"	d=8mm	R mm	D mm	B mm	L mm
RF02003	RF02004		2.0	13.5	13	41
RF02803	RF02804		2.8	15.1	13	41
		RF02805	2.8	15.1	13	45
RF03603	RF03604		3.6	16.7	19	47
		RF03605	3.6	16.7	19	51
RF05203	RF05204		5.2	22.2	19	47
		RF05205	5.2	22.2	19	51



Tool No. d=12mm	d=1/2"	R mm	D mm	B mm	L mm
RF05202	RF05208	5.2	22.2	19	57
RF09502	RF09508	9.5	33.3	35	72
RF12702	RF12708	12.7	42.0	40	78

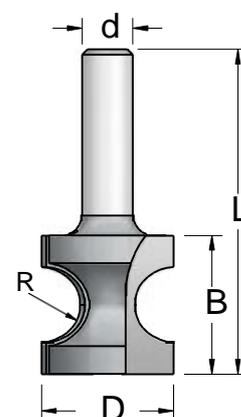

**RO**

**Finger Grip Bits –Trapezoidal**


Tool No.		D	D1	B	B1	L
d=12mm	d=1/2"	mm	mm	mm	mm	mm
RO45002	RO45008	45	25	21	8	61

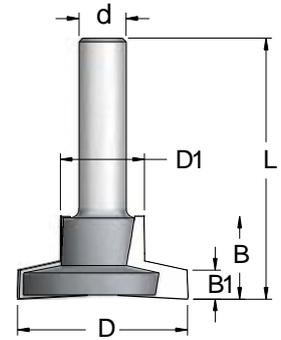

**RO**

**Finger Grip Bits – Short cut**



Tool No.		D	R	B	L
d=6mm	d=1/4"	mm	mm	mm	mm
RO10003	RO10004	26	9.5	9.5	42

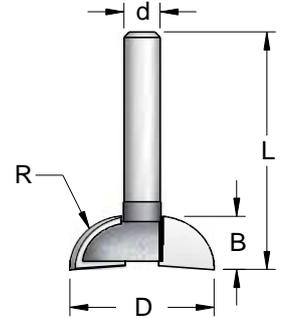

**RO**

**Classic Finger Grip Bits**

Tool No.		C	D	R	R1	B	L
d=12mm	d=1/2"	mm	mm	mm	mm	mm	mm
RO19002	RO19008	4.5	19	4.8	2.3	14.3	57.5
RO29002	RO29008	9	29	4.8	2.3	14	60
RO70002	RO70008	8.0	31.8	4.8	2.5	12	70
RO38002	RO38008	10.5	38.0	5.5	2.0	14.5	59

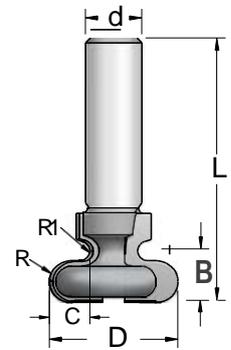


**RO**

**Finger Grip Bits**

With Ball Bearing Guide.

Tool No.		C	D	R	R1	B	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm	mm	mm	
RO70012	RO70018	8	44.0	5.0	2.5	12	76	B127063

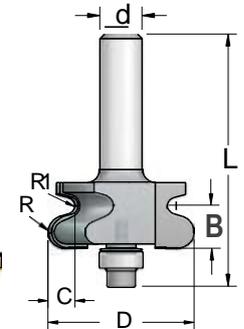


**RECG**

**Elliptic Cove Router Bits - 4Flutes**

For shaping edges with wide Elliptic coves.

4 flutes for better surface finish and longer tool life.

Double Bearing– wider Pilot for added stability.

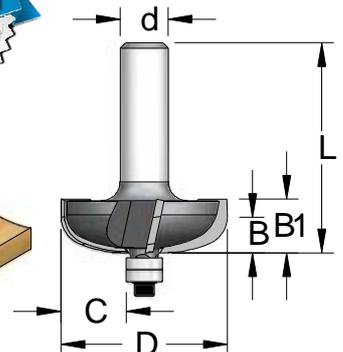


Tool No.		D	B	B1	C	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm	mm	
RECG102	RECG108	44.5	9.5	14	17.5	68	B095048 x2



## RK04

### Chamfering Bit with Radius

Tool No.		A	a	R	D	B	L	Ball Bearing
d=12mm	d=1/2"	mm	degrees	mm	mm	mm	mm	
RK04102	RK04108	24	10	4.0	61	14	78	B127048

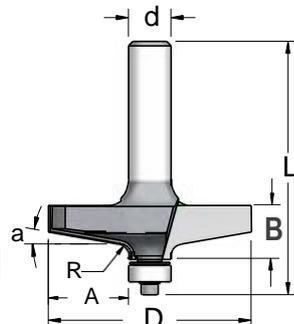


## RK

### Ogee

Tool No.		A	D	B	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm	
RK17002	RK17008	27.0	66.7	16	67.5	B127048
*RK18002	*RK18008	36.5	85.7	16	75	B127048

\*Max speed 16000 RPM

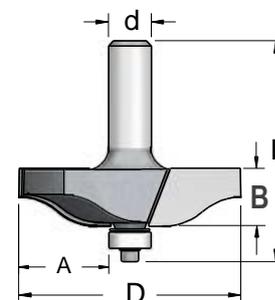


## RK15

### Traditional

Tool No.		A	a	D	B	L	Ball Bearing
d=12mm	d=1/2"	mm	degrees	mm	mm	mm	
*RK15002	*RK15008	36.5	15	85.7	12.7	71	B127048


\*Max speed 16000 RPM

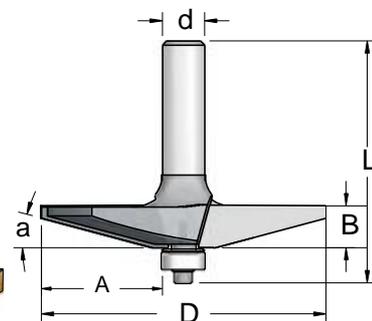

## RK20

### Traditional

Tool No.		A	a	D	B	L	Ball Bearing
d=12mm	d=1/2"	mm	degrees	mm	mm	mm	
RK20002	RK20008	27	20	66.7	16	69	B127048

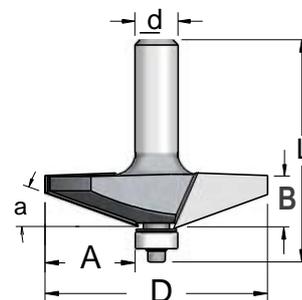


## RK40

### Cove

Tool No.		A	R	D	B	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm	mm	
*RK40002	*RK40008	36.5	40	85.8	12.7	72	B127048

\*Max. Speed 16000 RPM

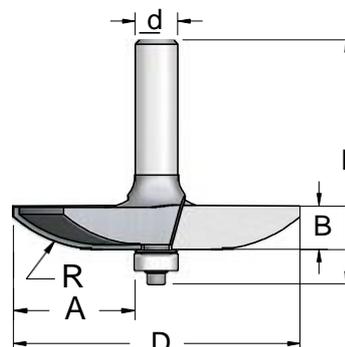


# RK43

## Raised Panel Thumbnail Bits



Tool No.		A	R	D	B	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	mm	mm	
*RK43002	*RK43008	28.2	43	69.2	16	76	B127048

\*Max. Speed 18000 RPM

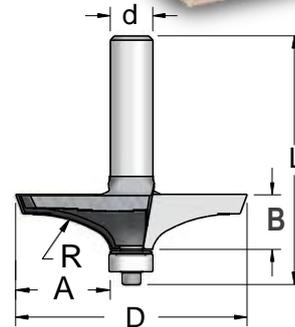

# Tongue & Groove Easy Set For Profile Scribed Doors

Assembly with 2 ball bearing guides and 3 grooving cutters.

No reassembly required.



Both parts of the joint are cut by only changing the cutter height.

# RGD2

## Ogee





Description	Tool No.			D	B	B1	L
	d=8mm	d=12mm	d=1/2"				
Assembly	RGD2005	RGD2002	RGD2008	41.0	22.0		84
Component							
1. Profile cutter	RGD2000	RGD2000	RGD2000	41.0		6.3	
2. Cutter	NG41060	NG41060	NG41060	41.0		6.3	
Ball Bearing	B220080	B220080	B220080				
Arbor & Nut	NHRG825	NHRG822	NHRG828				

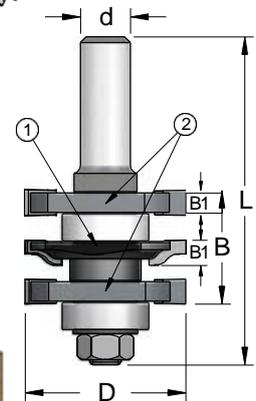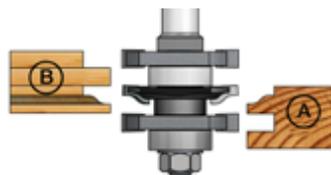

# RGD5

## Traditional

Description	Tool No.			D	B	B1	L
	d=8mm	d=12mm	d=1/2"				
Assembly	RGD5005	RGD5002	RGD5008	41.0	22.0		84
Components:							
1. Profile cutter	RGD5000	RGD5000	RGD5000	41.0		6.3	
2. Cutter	NG41060	NG41060	NG41060	41.0		6.3	
Ball Bearing	B220080	B220080	B220080				
Arbor & Nut	NHRG825	NHRG822	NHRG828				

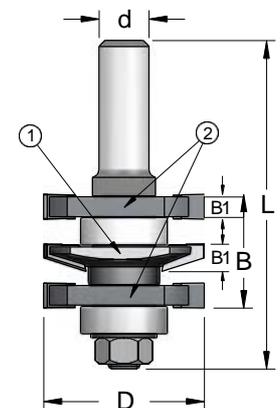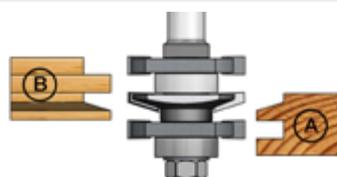

# TONGUE & GROOVE CLASSIC SETS



## Assembly with Ball Bearing Guide.

By reversing the assembly, you can use a single tool for both cuts A&B.  
Shims should be used for perfect alignment before and after sharpening.

### RG1

#### Ogee



Description	Tool No.			D	B	B1	B2	L
	d=8mm	d=12mm	d=1/2"					
Assembly	RG10005			46.0	22.0			70
		RG10002	RG10008	46.0	22.0			76
Components								
1. Profile cutter	RG10000	RG10000	RG10000	46.0			15	
2. Cutter	NG46040	NG46040	NG46040	46.0		4		
Ball Bearing	B220080	B220080	B220080					
Arbor & Nut	NG00005	NG00002	NG00008					

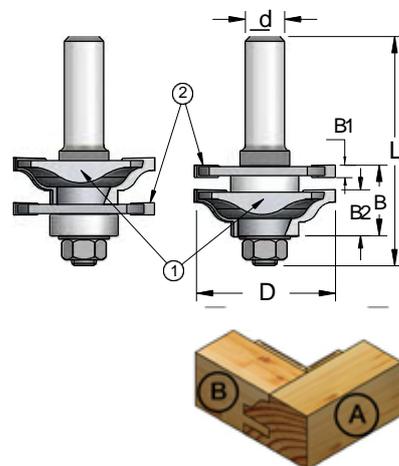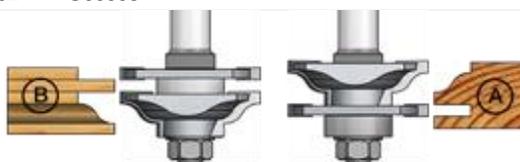

### RG2

#### Ogee


Description	Tool No.			D	B	B1	B2	L
	d=8mm	d=12mm	d=1/2"					
Assembly	RG20005			41.0	22.0			70
		RG20002	RG20008	41.0	22.0			76
Components								
1. Profile cutter	RG20000	RG20000	RG20000	41.0			11	
2. Cutter	NG41060	NG41060	NG41060	41.0		6.3		
Ball Bearing	B220080	B220080	B220080					
Arbor & Nut	NG00005	NG00002	NG00008					

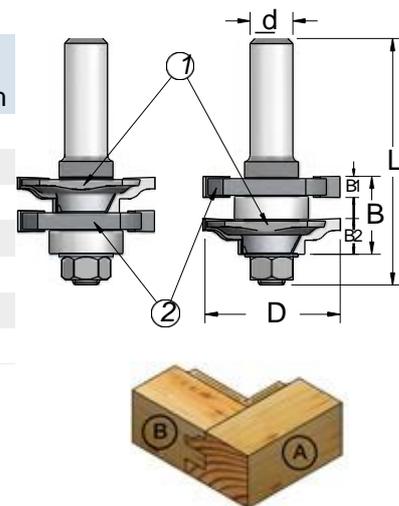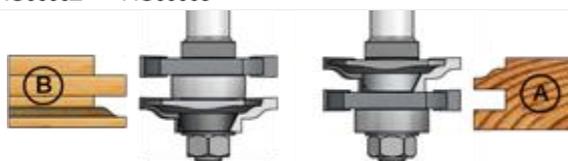


### RG3

#### Ogee

Description	Tool No.			D	B	B1	B2	L
	d=8mm	d=12mm	d=1/2"					
Assembly	RG30005			46.0	22.0			70
		RG30002	RG30008	46.0	22.0			76
Components								
1. Profile cutter	RG30000	RG30000	RG30000	46.0			15	
2. Cutter	NG46040	NG46040	NG46040	46.0		4		
Ball Bearing	B220080	B220080	B220080					
Arbor & Nut	NG00005	NG00002	NG00008					


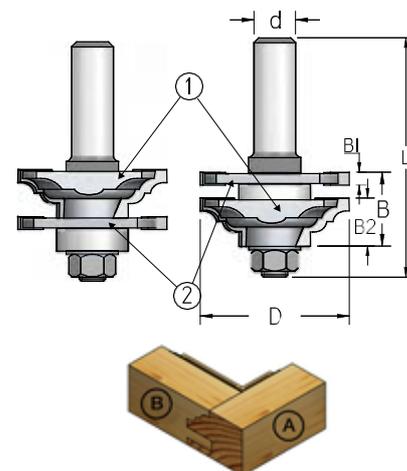


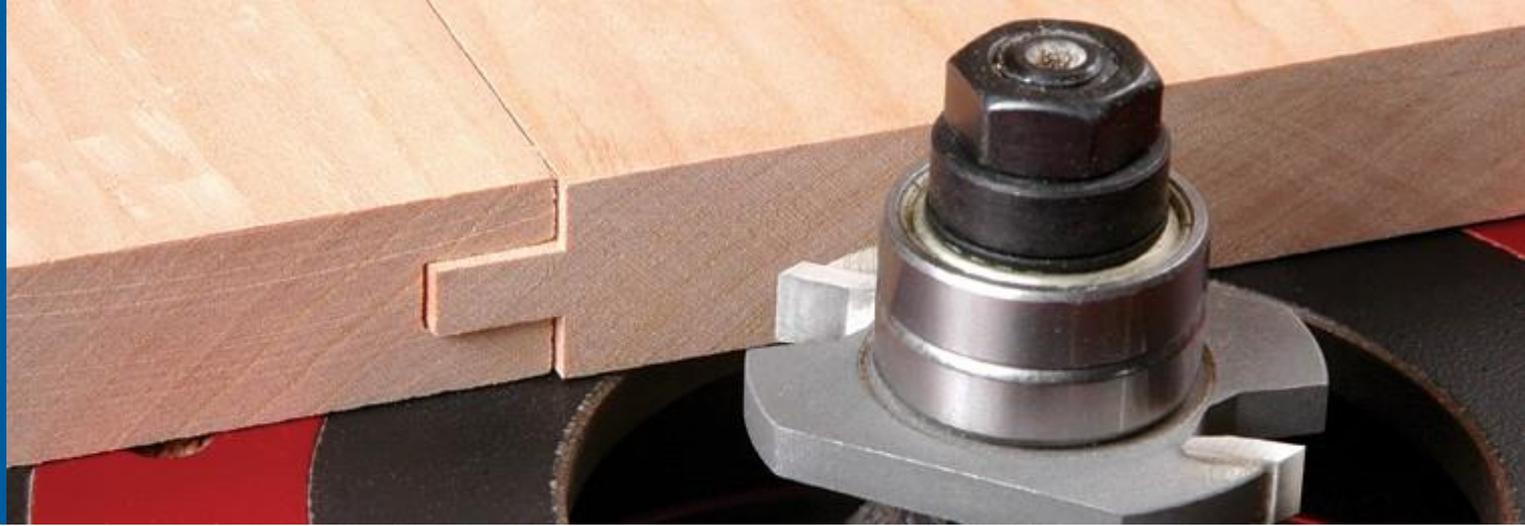

## RG5

### Traditional

Description	Tool No.			D	B	B1	B2	L
	d=8mm	d=12mm	d=1/2"					
Assembly	RG50005			41.0	22.0			70
		RG50002	RG50008	41.0	22.0			76
Components								
1. Profile cutter	RG50000	RG50000	RG50000	41.0			11	
2. Cutter	NG41060	NG41060	NG41060	41.0		6.3		
Ball Bearing	B220080	B220080	B220080					
Arbor & Nut	NG00005	NG00002	NG00008					

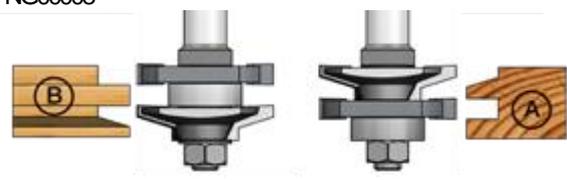
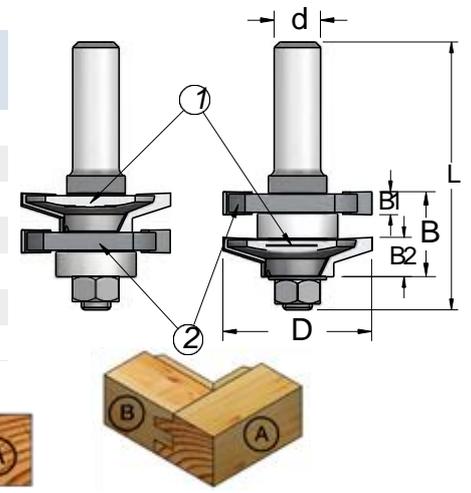


## RG6

### Tongue & Groove Cutter Set

By changing the components of the assembly, you can use a single tool for both cuts A&B.

Description	Tool No.			D	B	B1	L
	d=8mm	d=12mm	d=1/2"				
Assembly	RG60005	RG60002	RG60008	41.0	19.0		72
Components							
Cutter (x2)	NG41060	NG41060	NG41060	41.0		6.3	
Ball Bearing	B220080	B220080	B220080				
Arbor & Nut	NHRG815	NHRG812	NHRG818				


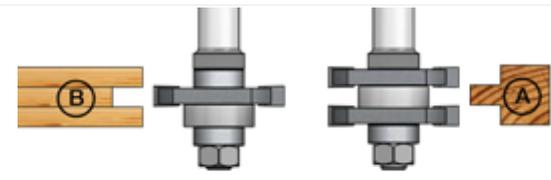
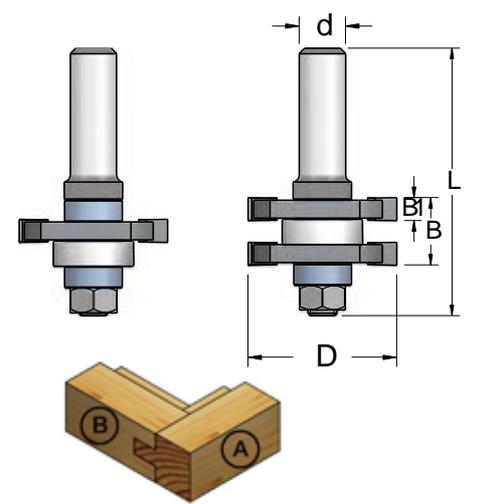


## N3

### Slotting Cutters 3 Wings

The assemblies include a cutter, arbor and bearing.

B mm	Cutter Tool No.	Assembly No.				
		d=6mm	d=1/4"	d=8mm	d=12mm	d=1/2"
1.5	N301500	N301583	N301584	N301585	N301582	N301588
1.6	N301600	N301683	N301684	N301685	N301682	N301688
2.0	N302000	N302083	N302084	N302085	N302082	N302088
2.4	N302400	N302483	N302484	N302485	N302482	N302488
2.5	N302500	N302583	N302584	N302585	N302582	N302588
3.0	N303000	N303083	N303084	N303085	N303082	N303088
3.2	N303200	N303283	N303284	N303285	N303282	N303288
4.0	N304000	N304083	N304084	N304085	N304082	N304088
4.8	N304800	N304883	N304884	N304885	N304882	N304888
5.0	N305000	N305083	N305084	N305085	N305082	N305088
6.0	N306000	N306083	N306084	N306085	N306082	N306088
6.3	N306300	N306383	N306384	N306385	N306382	N306388

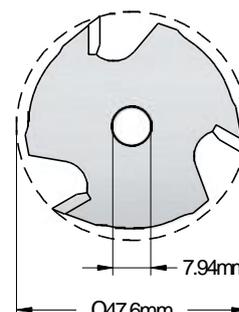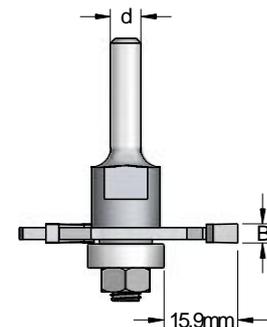

For all Arbors for Slotting Cutters see page 84.

## NB

### "Biscuit" Jointer Assembly


Includes slotting cutter, arbor and ball bearing guide.

d=6mm	Tool No. d=1/4"	d=8mm	For Biscuit No.	A mm	Bearing
NB15003	NB15004	NB15005	0	9	B220060
NB19003	NB19004	NB19005	10	10.5	B190060
NB23003	NB23004	NB23005	20	12.5	B150060

Components

2. Cutter (2 Wings)

N204030	N204030	N204030
	4	

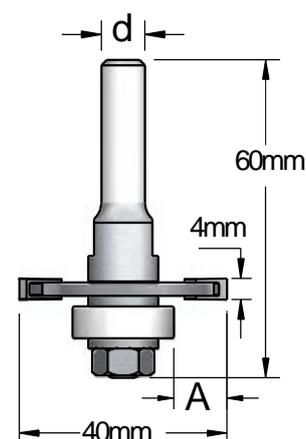

## NBS

### Set for all 3 sizes of biscuits

Includes slotting cutter, arbor and 3 ball bearing guides.

Set No.		
d=6mm	d=1/4"	d=8mm
NBS0303	NBS0304	NBS0305




# NS

## Variable Depth Set for Slotting Cutters

Includes arbor and 5 ball bearings for changing cut depths.  
All Slotting cutters N3 type can be used. Cutter not included.

d=6mm	Set No.		C mm	Ball Bearin g	L mm
	d=1/4 "	d=8mm			
NS79053	NS79054	NS79055	2.8 6.3 9.8 12.8	B420150 B350150 B280150 B220080	70

d=12mm	Set No.		C mm	Ball Bearing	L mm
	d=1/2"				
NS79052	NS79058		2.8 6.3 7.8 9.8 12.8	B420150 B350150 B320150 B280150 B220080	78

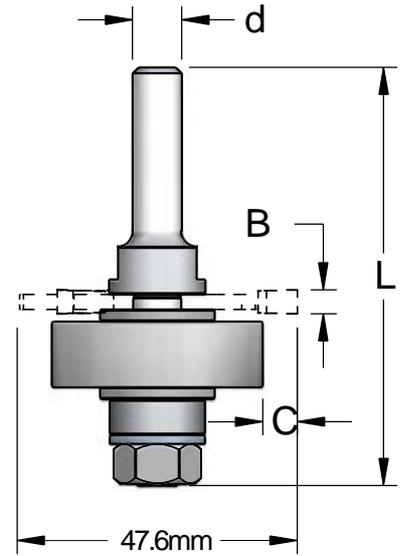

# NUS

## Slot & Undercut Bit with Variable Depth

**For general Slotting and undercutting. Suitable for flooring.**

Exchangeable bearings enable achieving different depths of cut.  
All assemblies are supplied with TorxKey T25.

B mm	Cutter Tool No.	Assembly No.		
		d=8mm	d=12mm	d=1/2"
Includes Cutter and arbor				
3.0	N3U0300	NU03005*	NU03002*	NU03008*
4.0	N3U0400	NU04005	NU04002	NU04008
5.0	N3U0500	NU05005	NU05002	NU05008
6.0	N3U0600	NU06005	NU06002	NU06008
Includes Cutter, arbor and 4 bearings				
3.0	N3U0300	NUS03045**	NUS03042**	NUS03048**
4.0	N3U0400	NUS04045	NUS04042	NUS04048
5.0	N3U0500	NUS05045	NUS05042	NUS05048
6.0	N3U0600	NUS06045	NUS06042	NUS06048



\*For NU03005/2/8 use the corresponding arbor - NU79005/2/8  
\*\*For NUS03045/2/8 use the corresponding arbor - NU79005/2/8  
Replacement Torx screw - BT50080

## Arbors for Slot & Undercut Bit

d=8mm	Tool No.		L mm
	d=12m m	d=1/2"	
NU79015			57
	NU79012	NU79018	67

Table for Choosing the bearing according to the desired slot



Ball Bearing	B420150	B350150	B320150	B280150
Slot Depth (C)	2.8 mm	6.3 mm	7.8 mm	9.8 mm

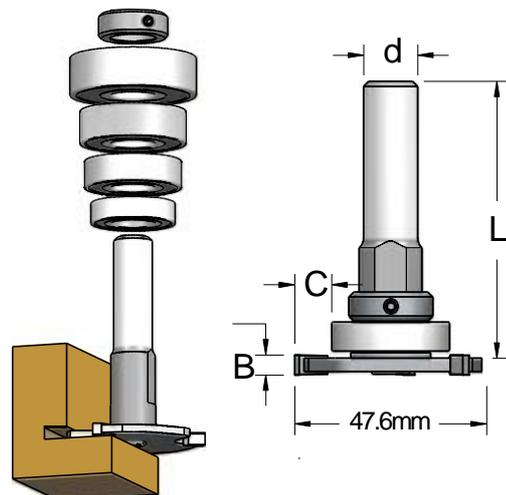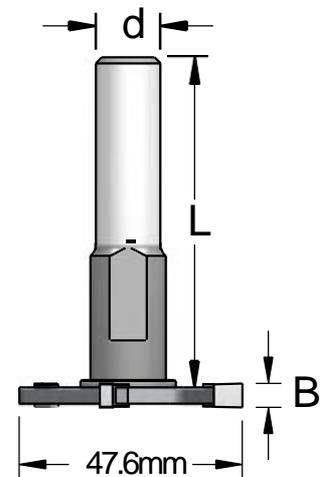

## FJ2

### Glue Joint Bit

Tool No.		D	B	L
d=12mm	d=1/2"	mm	mm	mm
FJ20002	FJ20008	47.0	28	66

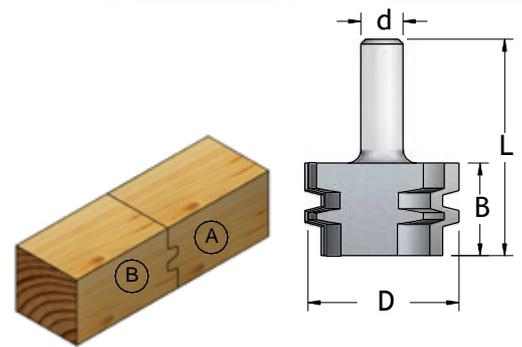
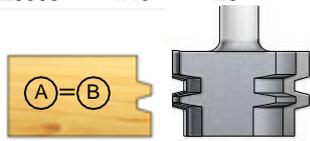


## FJ4

### 45° Lock

### Mitre Joint Bit

Tool No.		a	D	B	L
d=12mm	d=1/2"	degrees	mm	mm	mm
FJ40002	FJ40008	45	67.0	30	69

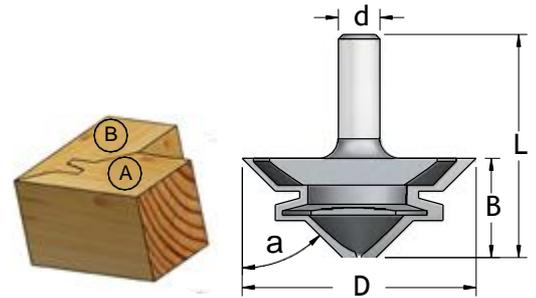
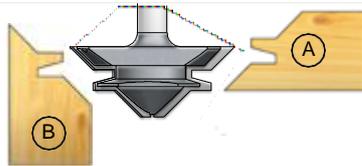


## FJ5

### Combi Joint Set

Assembly with Ball Bearing Guide.

Description	Tool No.		D	A	B	B1	L
	d=12mm	d=1/2"	mm	mm	mm	mm	mm
Assembly	FJ50002	FJ50008	47.6		36.0		96
Components							
Cutter (x5)	N304000	N304000	47.6			4.0	
Arbor & Nut	NFJ5002	NFJ5008					
Delrin Set	BDEL500	BDEL500		9.8			
Delrin Set	BDEL510	BDEL510		9.3			
Delrin Set	BDEL520	BDEL520		6.8			


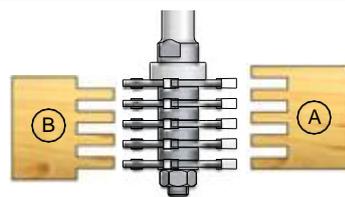
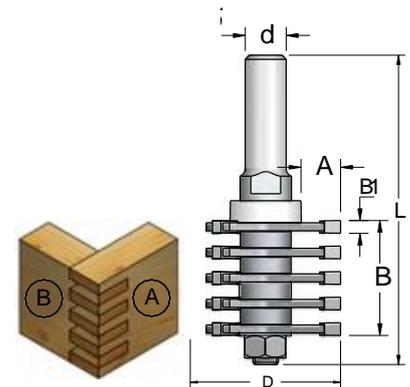


## FJ6

### Finger Joint Set

Assembly with Ball Bearing Guide.

Description	Tool No.		D	B	B1	L
	d=12mm	d=1/2"	mm	mm	mm	mm
Assembly	FJ60002	FJ60008	39.5	33.0		96
Component						
1.Cutter (x5)	NJ39020	NJ39020	39.5		1.9	
2.Cutter (x1)	NJ39050	NJ39050	39.1		5.5	
Arbor & Nut	NFJ6002	NFJ6008				
Ball Bearing	B280080	B280080				

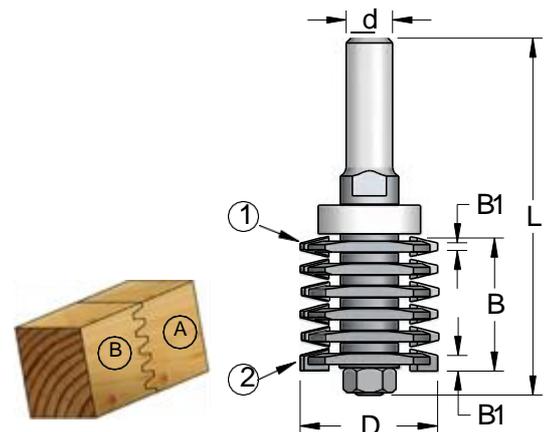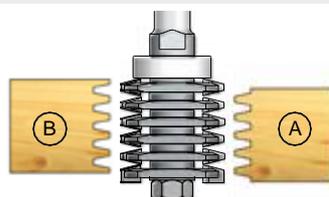

# SOLID SURFACE (CORIAN®) ROUTER BITS

This line of router bits was designed especially for working on solid surface materials that are widely used for producing kitchen countertops as well as in other applications.

A special Low Friction Delrin® Bearing Assembly is used, in order to protect the material surface from scratches, and to achieve a clean surface. Using WPW unique 4 fluted tools result in a perfect surface finish on the workpiece and extra-long tool life. It might require slowing down the feed rate a little bit compared to using 2 fluted tools, but the results justify it.



1998



2011



2019

Year Developed

# FLUSH TRIM BITS / INLAY TRIMMING BITS

For trimming inlay or overlaps


Low Friction Delrin® Bearing Assembly

## F2...C

2 flutes with bottom ball bearing guide

Tool No.		D	B	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	
F241902C	F241908C	19.0	25	75	B190063C

For ordering F2...C with standard metal bearing (without Delrin®), drop the letter C at the end of the Tool Number

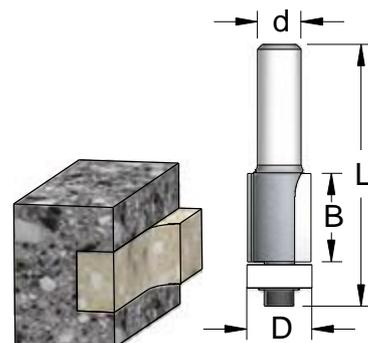


## F4...C

4 flutes with bottom ball bearing guide

For better surface finish and longer tool life than tools with 2 flutes

Tool No.		D	B	L	Ball Bearing
d=12mm	d=1/2"	mm	mm	mm	
F441902C	F441908C	19.0	25	75	B190063C
F461902C	F461908C	19.0	38	99	B190063C
F481902C	F481908C	19.0	51	105	B190063C

For ordering F4...C with standard metal bearing (without Delrin®), drop the letter C at the end of the Tool Number

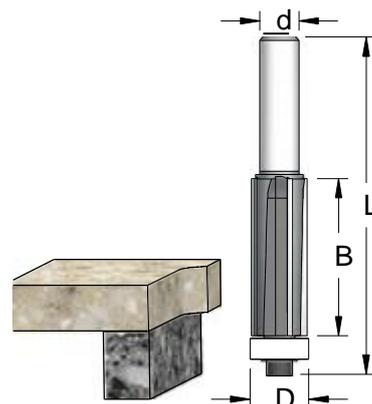

## PF...C


2 flutes with shank mounted bearing

Tool No.		D	B	L	Ball Bearing	Retainer
d=12mm	d=1/2"	mm	mm	mm		
*PF424V2C	-	24.0	25	83	B240120C	BDK1100
**PF72542	** PF72548	25.4	45	96	B254127	PF19000
***PF62852C	*** PF62858C	28.6	38	90	B285127C	PF12700

\*Only with Delrin bearing

\*\*Only with metal bearing (without Delrin®)

\*\*\* For ordering with standard metal bearing (without Delrin®), drop the letter C at the end of the Tool Number

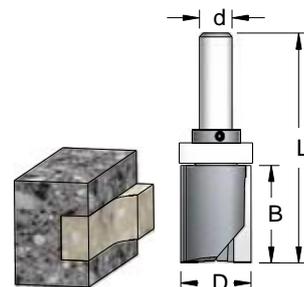


## FPM...C

Tool No.		D	B	L	Blade No.	Ball Bearing	Retainer
d=12mm	d=1/2"	mm	mm	mm			
FPM1922C	FPM1928C	19.0	50	118	CM501217 x2	B190063C+B190127x2	PF19000

Only the bottom bearing is with Delrin bearing.


For ordering FPM...C with standard metal bearing (without Delrin®), drop the letter C at the end of the Tool Number

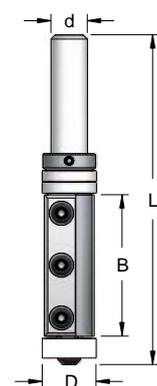

## SLS...C

Bevel Trim Bit

Tool No.		a	D	B	L	Ball Bearing
d=12mm	d=1/2"	degrees	mm	mm	mm	
SLS1242C	SLS1248C	12°	32	25	80	B210100C
SLS1252C	SLS1258C	12°	39	32	78	B250050C

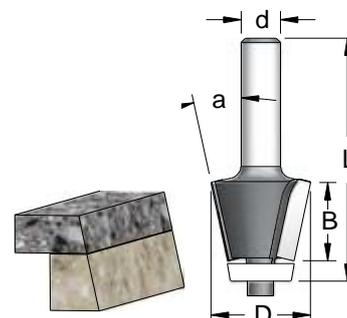

# ROUNDING OVER BITS

Low Friction Delrin® Bearing Assembly

## RWG...C



4 flutes

Special design for perfect surface finish and longer tool life.

To No.	R	D	D1	B	L	Ball Bearing
d=12mm	mm	mm	mm	mm	mm	

RWG0602C RWG0608C 6.3 28.6 15.9 11 64 B159063C

For ordering RWG...C with standard metal bearing (without Delrin®), drop the letter C at the end of the Tool Number

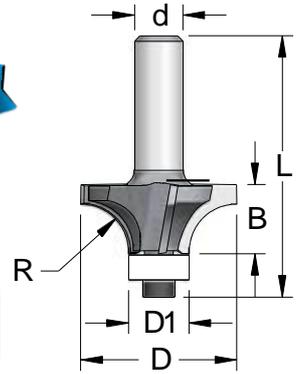

## RW...C

2 flutes

Tool No.	R	D	D1	B	L	Ball Bearing
d=12mm	mm	mm	mm	mm	mm	



RW03002C RW03008C 3.2 19.0 12.7 9.5 61 B127048C

RW06002C RW06008C 6.3 25.4 12.7 11 61 B127048C

RW10002C RW10008C 9.5 31.8 12.7 16 68 B127048C

RW12002C RW12008C 12.7 38.1 12.7 18 68 B127048C

For ordering RW...C with standard metal bearing (without Delrin®), drop the letter C at the end of the Tool Number

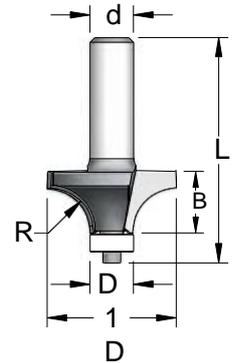


## RWW...C

Undermount Bowl Bits

Tool No.	R	a	D	B	L	Ball Bearing
d=12mm	mm	degrees	mm	mm	mm	

RWW13182C RWW13188C 13.0 18° 54.0 25 79 B210100C

RWW14182C RWW14188C 14.0 18° 57.0 32 85 B210100C

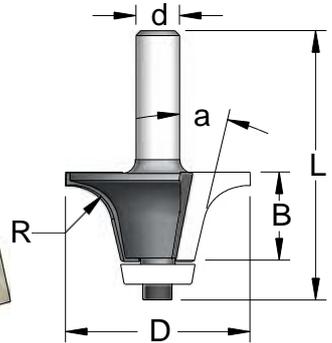


## RWW...C

Bevel Guided Bits

Tool No.	R	a	D	B	L	Ball Bearing
d=12mm	mm	degrees	mm	mm	mm	

RWW10172C RWW10178C 9.5 17° 45.2 18 64 B220100C

RWW13172C RWW13178C 12.7 17° 54.0 25 72 B220100C

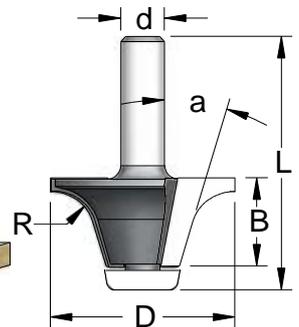

## RO...C

"No Drip" Countertop Bit



Low Friction Delrin® Bearing Assembly

Tool No.	R	D	D1	B	B1	L	Ball Bearing
d=12mm	mm	mm	mm	mm	mm	mm	

RO251932C RO251938C 8.0 25.0 19.0 23 16 77 B190063C

RO251942C RO251948C 8.0 25.0 19.0 29 24 83 B190063C

For ordering RO...C with standard metal bearing (without Delrin®), drop the letter C at the end of the Tool Number

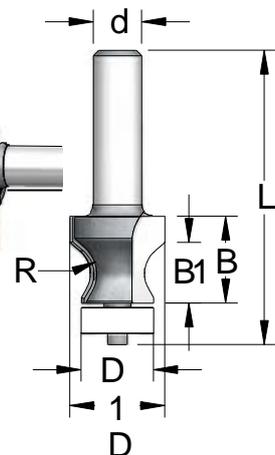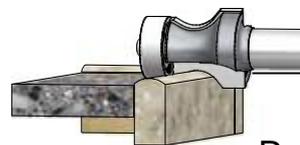


## DB..C

### Cove Bit

Shank mounted Low Friction Delrin® Bearing Assembly

Tool No.		R	D	B	L	Ball Bearing	Retainer
d=12mm	d=1/2"	mm	mm	mm	mm		
DB28102C	DB28108C	10.0	28.6	13	73	B285150C	PF15020

For ordering with standard metal bearing (without Delrin®), drop the letter C at the end of the Tool Number.

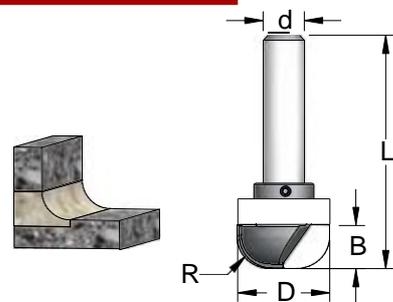


## P4...C

### 4 Flutes Countertop Surface trimmer

Create shallow recesses in countertops. The rounded bottom of the tool produces a rounded edge on the countertop to make it easier for cleaning.

Tool No.		D	B	L
d=12mm	d=1/2"	mm	mm	mm
P425102C	P425108C	50.8	13	63

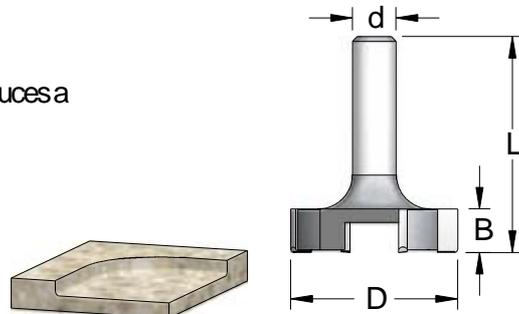


## EM

### Rabbeting bit with replaceable blades

Reduces set up time and cost effective.

Supplied with Torx key.


Tool No.		Flutes	C	D	B	L	Ball Bearing	Blade No.
d=8mm	d=12mm	d=1/2"	mm	mm	mm	mm		
EM21275		2	12.7	35.0	12	54	B095063	CM01212
	EM21272	EM21278	2	12.7	35.0	12	B095063	CM01212
	EM42222	EM42228	4	22.2	57.0	12	B127063	CM01212

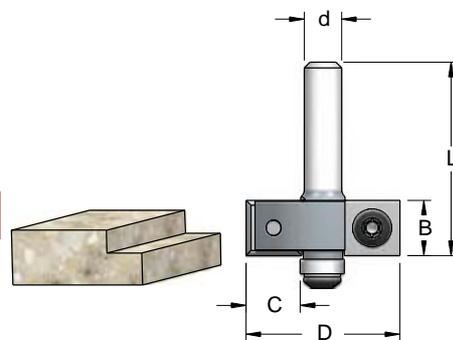

## SCU

### Double flute Upcut Spiral Bits

Tool No.	d = D	B	L
	mm	mm	mm
SCU240805	8	25	60
SCU271202	12	42	90

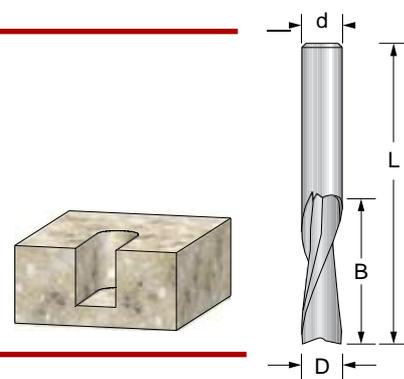


## B...C

### Low Friction Delrin® Bearing replacement Assembly

Stock No.	D	D1	B
	mm	mm	mm
B127048C	12.7	4.8	5
B159063C	15.9	6.3	7
B190063C	19.0	6.3	7
B240120C	24.0	12.0	7
B285127C	28.5	12.7	8
B285150C	28.5	15.0	8.5

Stock No.	a	D	D1	B
	degree	mm	mm	mm
B210100C	10	21.8	6.3	5.7
B220100C	10	22.2	6.3	5.7
B250050C	5	25.4	6.3	8.2

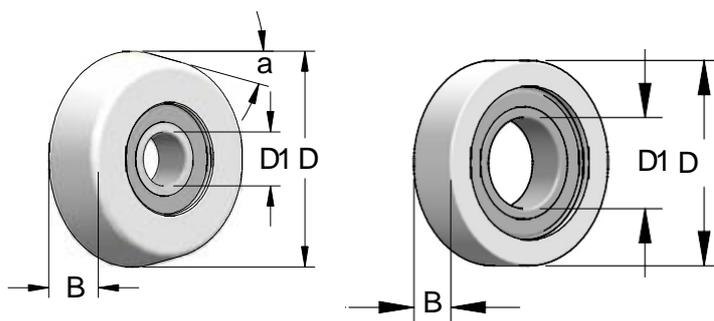

# WOODPECKER

Economical line of quality carbide tipped router bits - essential for every craftsman and DIY amateur. A basic assortment of router bits and sets. The tools facilitate renovations, repairs and restoration of furniture. Excellent for building furniture and artistry on wood. Available with 6mm shank, 8mm shank and 1/4" shank.



Year Developed

1992

WPW

# Woodpecker Router Bits


Economical line of quality carbide tipped router bits



## HP

### Straight Bits


Tool No.		D	B	L	
d=6mm	d=1/4"	d=8mm	mm	mm	
HP21053	HP21054	HP21055	5	12	48
HP23063	HP23064	HP23065	6	20	48
HP23083	HP23084	HP23085	8	20	48
HP24083	HP24084	HP24085	8	25	56
HP23103	HP23104	HP23105	10	20	48
HP23123	HP23124	HP23125	12	20	48
HP24123	HP24124	HP24125	12	25	56
HP23133	HP23134	HP23135	12.7	20	48
HP23143	HP23144	HP23145	14	20	48
HP23163	HP23164	HP23165	16	20	48
HP23183	HP23184	HP23185	18	20	48
HP23193	HP23194	-	19	20	48
HP23203	HP23204	HP23205	20	20	48
HP23253	HP23254	-	25	20	48

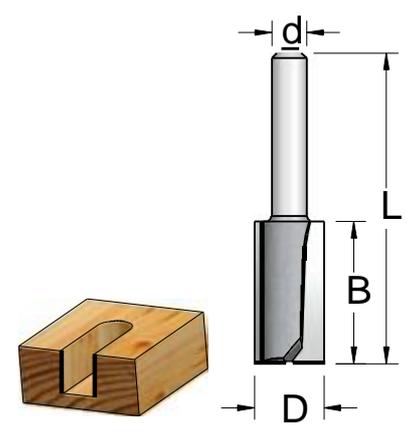

## HF

### Flush Trimming Bits


Tool No.		D	B	L	Bearin	
d=6mm	d=1/4"	d=8mm	mm	mm	g mm	
HF22093	HF22094	HF22095	9.5	13	53	B095032
HF24093	HF24094	HF24095	9.5	25	65	B095032
HF22123	HF22124	HF22125	12.7	13	53	B127048
HF24123	HF24124	HF24125	12.7	25	65	B127048

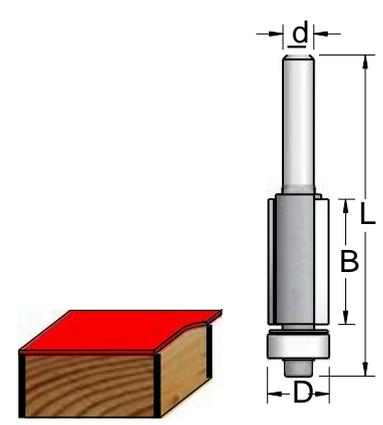

## HPF

### Straight Plunge Template Bits


Tool No.		D	B	L	Bearing	Retaining Collar	
d=6mm	d=1/4"	d=8mm	mm	mm	mm		
HPF4123	HPF4124		12.7	25	63	B127063	PF06300
HPF4163	HPF4164		16	25	63	B159063	PF06300
		HPF4165	16	25	63	B160080	PF08000

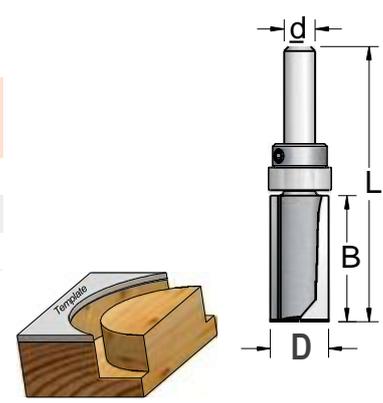

# HSL

## Bevel Trimming Bits


d=6mm	Tool No.		a	B	L	Bearing
	d=1/4"	d=8mm	degrees	mm	mm	
HSL1503	HSL1504	HSL1505	15	6.5	51	B127048
HSL2253	HSL2254	HSL2255	25	6.5	46.5	B095032
HSL2453	HSL2454	HSL2455	45	13	50	B095032

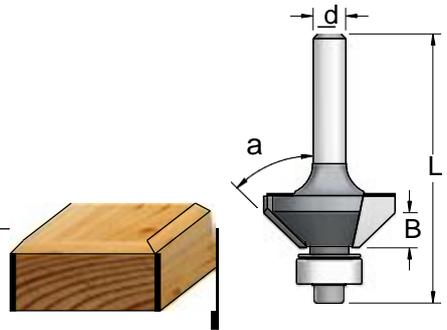

# HE

## Rabbeting Bits

d=6mm	Tool No.		C	D	B	L	Bearing
	d=1/4"	d=8mm	mm	mm	mm	mm	
HE22033	HE22034	HE22035	3.0	18.8	11	46	B127048
HE22103	HE22104	HE22105	9.5	28.6	12	47	B095032
HE22093	HE22094	HE22095	11.1	31.8	12	46.5	B095048

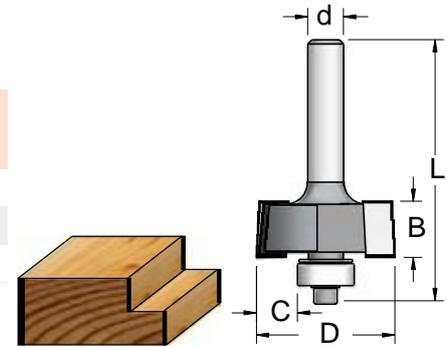


# HES

## Rabbeting & Flush Trim Set

2 bits - 4 bearing guides  
Allows 8 different cuts


d=6mm	Tool No.		D	B	L	C	Bearing
	d=1/4"	d=8mm	mm	mm	mm	mm	
HES8003	HES8004	HES8005					
Components							
						0-flush	B190048
						1.5	B160048
HE22033	HE22034	HE22035	18.8	11	46	3.0	B127048
						4.6	B095048
						6.3	B190048
HE22093	HE22094	HE22095	31.8	12	46	8.0	B160048
						9.5	B127048
						11.1	B095048

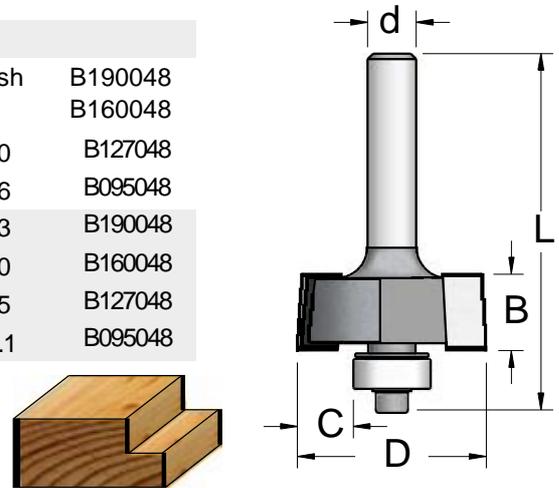

# HZ

## Dovetail Bit


d=6mm	Tool No.		a	D	B	L
	d=1/4"	d=8mm	degrees	mm	mm	mm
HZ13143	HZ13144	HZ13145	14	12.7	12	45

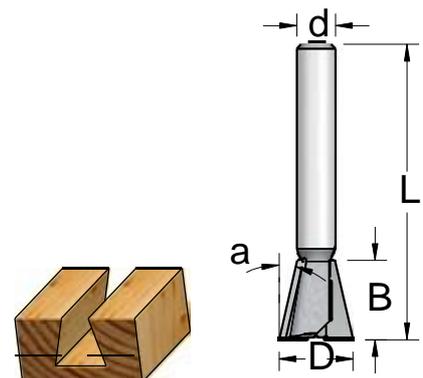

## HV

### "V"- Grooving Bits


Tool No.		a	D	B	L	
d=6mm	d=1/4"	d=8mm	degrees	mm	mm	
HV60953	HV60954	HV60955	60	9.5	10	41
HV90123	HV90124	HV90125	90	12.7	8	38

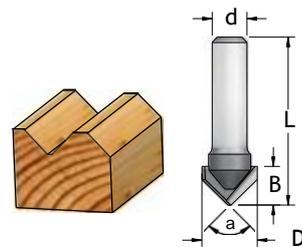

## HRB

### Core Box Bits


Tool No.		R	D	B	L	
d=6mm	d=1/4"	d=8mm	mm	mm	mm	
HRB0603	HRB0604	HRB0605	3.2	6.3	5	42
HRB1203	HRB1204	HRB1205	6.3	12.7	8	39

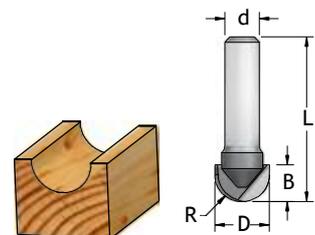

## HRD

### Roman Ogee Bits


Tool No.		R	D	B	L	Bearing	
d=6mm	d=1/4"	d=8mm	mm	mm	mm	mm	
HRD0403	HRD0404	HRD0405	4.0	25	16	52	B095032
HRD0603	HRD0604	HRD0605	6.3	35	19	57.5	B095032

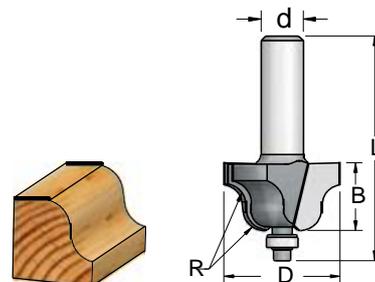

## HRZ

### Cove Bits


Tool No.		R	D	B	L	Bearing	
d=6mm	d=1/4"	d=8mm	mm	mm	mm	mm	
HRZ0603	HRZ0604	HRZ0605	6.3	22	13	49	B095032
HRZ1003	HRZ1004	HRZ1005	9.5	28.6	14	51	B095032
HRZ1203	HRZ1204	HRZ1205	12.7	35	15	54	B095032

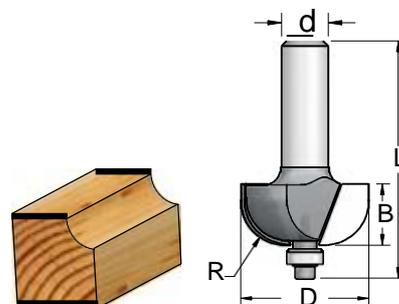

## HRJ

### Wavy Edge Bit


Tool No.		R	D	B	L	Bearing	
d=6mm	d=1/4"	d=8mm	mm	mm	mm	mm	
HRJ0303	HRJ0304	HRJ0305	3	23	13	47.5	B095032

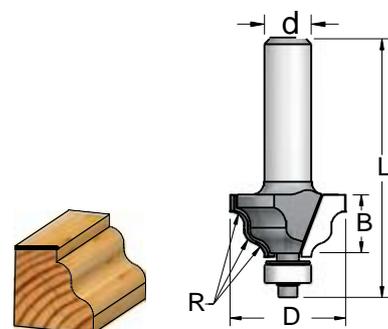

## HRW

### Rounding Over Bits


Tool No.			R	D	D1	B	L	Bearing
d=6mm	d=1/4"	d=8mm	mm	mm	mm	mm	mm	
HRW0303	HRW0304	HRW0305	3.2	15.8	9.5	10	45	B095032
HRW0603	HRW0604	HRW0605	6.3	22	9.5	13	47	B095032
HRW0803	HRW0804	HRW0805	8	25	9.5	15	49	B095032
HRW1003	HRW1004	HRW1005	9.5	28.6	9.5	17	51	B095032
HRW1213	HRW1214	HRW1215	12.7	38	12.7	17.5	59	B127048

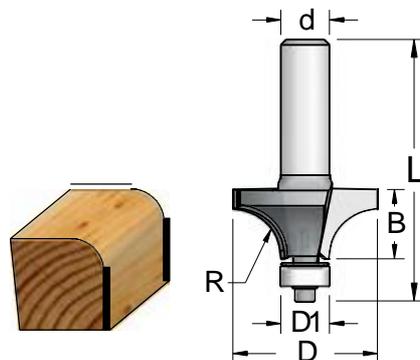

## HRP

### Beading Bits

Tool No.			R	D	D1	B	L	Bearing
d=6mm	d=1/4"	d=8mm	mm	mm	mm	mm	mm	
HRP0303	HRP0304	HRP0305	3.2	15.8	9.5	10	45	B063032
HRP0603	HRP0604	HRP0605	6.3	22	9.5	13	47	B063032
HRP0803	HRP0804	HRP0805	8	25	9.5	15	49	B063032
HRP1003	HRP1004	HRP1005	9.5	28.6	9.5	17	51	B063032
HRP1213	HRP1214	HRP1215	12.7	38	12.7	17.5	59	B095048

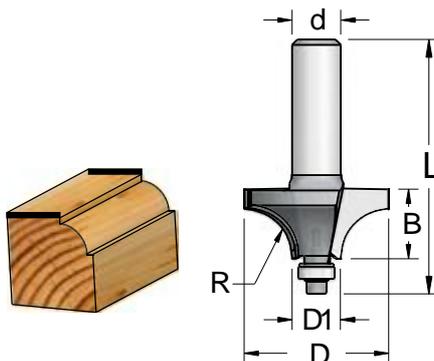

## HS06

### 6 Pcs. Starter Set

In a handsome wooden storage box.

Set No.		
d=6mm	d=1/4"	d=8mm
HS06223	HS06224	HS06225
Consists of:		
HP23063	HP23064	HP23065
HP23123	HP23124	HP23125
HRD0403	HRD0404	HRD0405
HRP0603	HRP0604	HRP0605
HRW1003	HRW1004	HRW1005
HV90123	HV90124	HV90125



## HS04RW5

### 4 Pcs. Set of Rounding Over / Beading Bits

In a handsome wooden storage box.

Consists of 4 tools with 8mm shank plus a replacement bearing for using the tools as Beading Bits and a hex key.

Tools: HRW0305, HRW0605, HRW0805 and HRW1005

Replacement bearing: B063032



# REPLACEMENT PARTS

Adapters, Ball Bearing guides, screws and other accessories for router machines and for router bits.



1998



2011



2015

Year Developed

# Replacement Parts


Accessories for CNC machines, router machines, router bits, countersinks and Drilling tools.

## TX

### Shank Extension Adapters

For CNC and Router machines. Allows deeper reach for a wide range of applications.

**Very useful when the bit is too short for the job.**

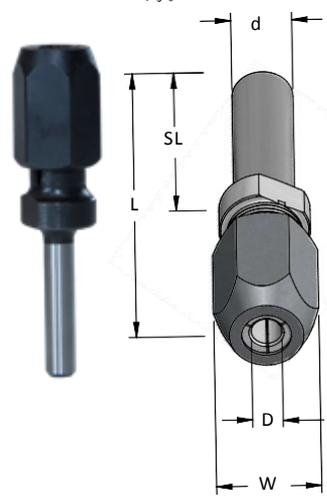



		Stock No.		D	W	SL	L
d=6mm	d=1/4"	d=8mm	d=12mm	d=1/2"	mm	mm	mm
TX03203	TX03204				3.17 (1/8")	11.1	28.5
TX06303	TX06304				6.35 (1/4")	16	28.5
		TX06302	TX06308		6.35 (1/4")	19	38
		TX08005			8	16	32
		TX12002			12	25.4	42
		TX12702	TX12708		12.7 (1/2")	25.4	42

## T/TL

### Reduction Sleeves

For reducing collet size to take smaller shank.

Stock No	D mm	D1 mm	L mm
Single spring slot			
T060030	6	3	20
T060032	6	3.17 (1/8")	25
T060040	6	4	25
T063030	6.35 (1/4")	3	25
T063032	6.35 (1/4")	3.17 (1/8")	25
T063040	6.35 (1/4")	4.0	19
T063048	6.35 (1/4")	4.76 (3/16")	25
T080060	8	6	25
T080063	8	6.35 (1/4")	25
T095063	9.5 (3/8")	6.35 (1/4")	25
T095080	9.5 (3/8")	8	25
T100060	10	6	25
T100063	10	6.35 (1/4")	25
T100080	10	8	25
4 spring slots			
T120060	12	6	25
TL12063	12	6.35 (1/4")	30
T120080	12	8	25
T120100	12	10	25
T127032	12.7 (1/2")	3.17 (1/8")	25
T127048	12.7 (1/2")	4.76 (3/16")	25
TL12760	12.7 (1/2")	6	30
T127063	12.7 (1/2")	6.35 (1/4")	25
TL12763	12.7 (1/2")	6.35 (1/4")	30
T127079	12.7 (1/2")	7.9 (5/16")	25
T127080	12.7 (1/2")	8	25
TL12795	12.7 (1/2")	9.5	30
T127100	12.7 (1/2")	10	25

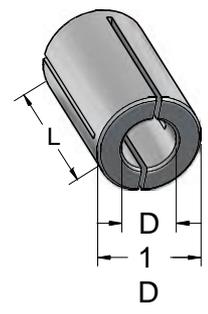


# B

## Ball Bearings

Stock No	D mm	D1 mm	B mm
B048024	4.76	2.38	2.4
B063032	6.35	3.17	2.8
B080040	8.00	4.00	3
B090040	9.00	4.00	4
B095032	9.53	3.17	4
B095048	9.53	4.76	3.2
B095063	9.53	6.35	3.2
B100040	10.00	4.00	4
B100050	10.00	5.00	4
B110040	11.00	4.00	4
B110050	11.00	5.00	4
B120040	12.00	4.00	4
B120060	12.00	6.00	4
B120080	12.00	8.00	3.5
B124048*	12.40	4.76	5
B127048	12.70	4.76	5
B127063	12.70	6.35	4.8
B130040	13.00	4.00	5
B150060	15.00	6.00	5

Stock No	D mm	D1 mm	B mm
B159063	15.87	6.35	5
B160048	15.87	4.76	5
B160050	16.00	5.00	5
B160080	16.00	8.00	5
B190048	19.05	4.76	6
B190060	19.00	6.00	6
B190063	19.05	6.35	7.1
B190127	19.05	12.70	4
B220060	22.00	6.00	7
B220080	22.00	8.00	7
B254127A**	25.40	12.70	8.5
B260100	26.00	10.00	8
B280150	28.00	15.00	7
B285127	28.57	12.70	8
B320150	32.00	15.00	9
B350150	35.00	15.00	11
B420150	42.00	15.00	13

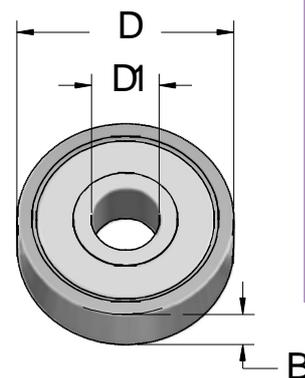


\*undersized Bearing – for use after resharpening Router Bits  
\*\*Aluminum Assembly

# BD

## Dust Shields

Mounted behind Ball Bearing in order to inhibit dust.

Stock No	D1 mm	D mm	Ball Bearing
BD08040	4	6.5	B080040
BD09532	3.2	9	B095032
BD09548	4.8	9	B095048
BD12748	4.8	12	B127048
BD16050	5	15	B160050
BD16063	6.4	15	B190063
BD35150	15	30	B350150




# PF...0

## Retaining Collars

Used for retaining Ball Bearings on Router Bit shanks.



Stock No	D1 mm	D mm	Screw No.
PF09500	6.35	9.3	BR32026
PF06300	6.35	11.0	BR32026
PF08010	8	11.5	BR32026
PF08000	8	14.0	BR32032
PF10000	10	16.0	BR32026
PF19000	12.7	18.5	BR32026
PF12700	12.7	23.0	BR48048
PF15000	15	23.0	BR48048



# N

## Arbors for Slotting Cutters


d=6mm		d=1/4"		d=8mm		d=12mm		d=1/2"		D mm	D1 mm	L mm
Arbor & Nut												
N000003	N000004	N000005								7.94	6.35	55
						N000002	N000008			7.94	6.35	68
Arbor, Nut and Bearing												
N000803	N000804	N000805								7.94	6.35	55
				N000802	N000808					7.94	6.35	68
Arbor, Nut & Spacers												
N000013	N000014	N000015								7.94	-	70
						N000012	N000018			7.94	-	78
Arbor, Nut, spacers and bearing B220080												
N000813	N000814	N000815								7.94	-	70
				N000812	N000818					7.94	-	78

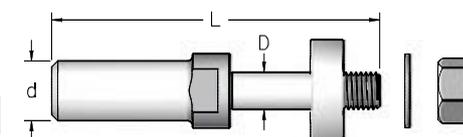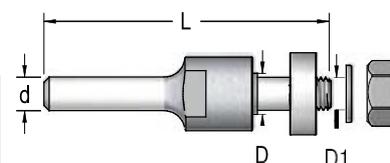

# BR/BT

## Screws

Stock No.	Description	Application	Fixing Key No.
<b>Cap Screws</b>			
BR25063	NC3/48 x 6.3mm	Ball bearing fixing	KEY5/64
BR25095	NC3/48 x 9.5mm	Ball bearing fixing	KEY5/64
BR30100	M3 x 10mm	Ball bearing fixing	KEY02.5
BR32095	NC5/40 x 9.5mm	Ball bearing fixing	KEY3/32
BR40120	M4 x 12mm	ACM countersink and TATM	KEY03.0
BR48127	NF10-32 x 12.7mm	Ball bearing fixing	KEY04.0
BR50150	M5 x 15mm	ACM countersink and TATM	KEY04.0
<b>Cap Screws with washer (SEMS)</b>			
BRW3295	NC5/40 x 9.5mm	Ball bearing fixing	KEY3/32
<b>Set Screws</b>			
BR32026	NC5/40 x 2.6mm	Retaining Collars	KEY01.6
BR32032	NC5/40 x 3.2mm	Retaining Collars	KEY01.6
BR40050	M4 x 5mm	Combi chuck adapters	KEY5/64
BR48048	NC10/24 x 4.8mm	Countersinks & Counterbores	KEY3/32
BR50050	M5 x 5mm	Combi chucks	KEY02.5
BR50100	M5 x 10mm	Combi drills & adapters	Screwdriver (slot)
BR60050	M6 x 5mm	Countersinks & adapters	KEY03.0
BR60060	M6 x 6mm	Countersinks & Counterbores	KEY03.0
BR63040	NF1/4-28 x 4mm	Countersinks & Counterbores	KEY1/8
BR63048	NF1/4-28 x 4.8mm	Countersinks & Counterbores	KEY1/8
BR63063	NF1/4-28 x 6.3mm	Countersinks & Counterbores	KEY1/8
<b>Tox Screws</b>			
BT40060	ToxM4 x 6mm	Replaceable bits	KEY-TORX15
BT50080	ToxM5 x 8mm	Fixing Slot & Undercut bit	KEY-TORX25
<b>Button Cap Screws</b>			
BRK6363	NF1/4-28 x 6.3mm	Fixing Stopper on Countersink	KEY-4032




# CM

## Tungsten Carbide Replaceable Blades

For tools with replaceable Carbide blades.


Stock No	L mm	W mm	T mm	Cut. Edges	Holes
CM01212/K	12	12	1.5	4	1
CM03012b/K	30	12	1.5	2	2
CM03012	29.5	12	1.5	4	2
CM05012	49.5	12	1.5	4	2
CM501217/K	50	12	1.7	4	3

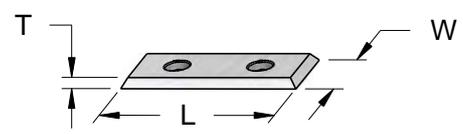

**/K** Can be ordered with Harder Grade. While ordering, just add the letter "K" at the end of the Stock No.

# TECHNICAL INFORMATION

Technical information about router bits, including recommended cutting speeds, safety information etc.

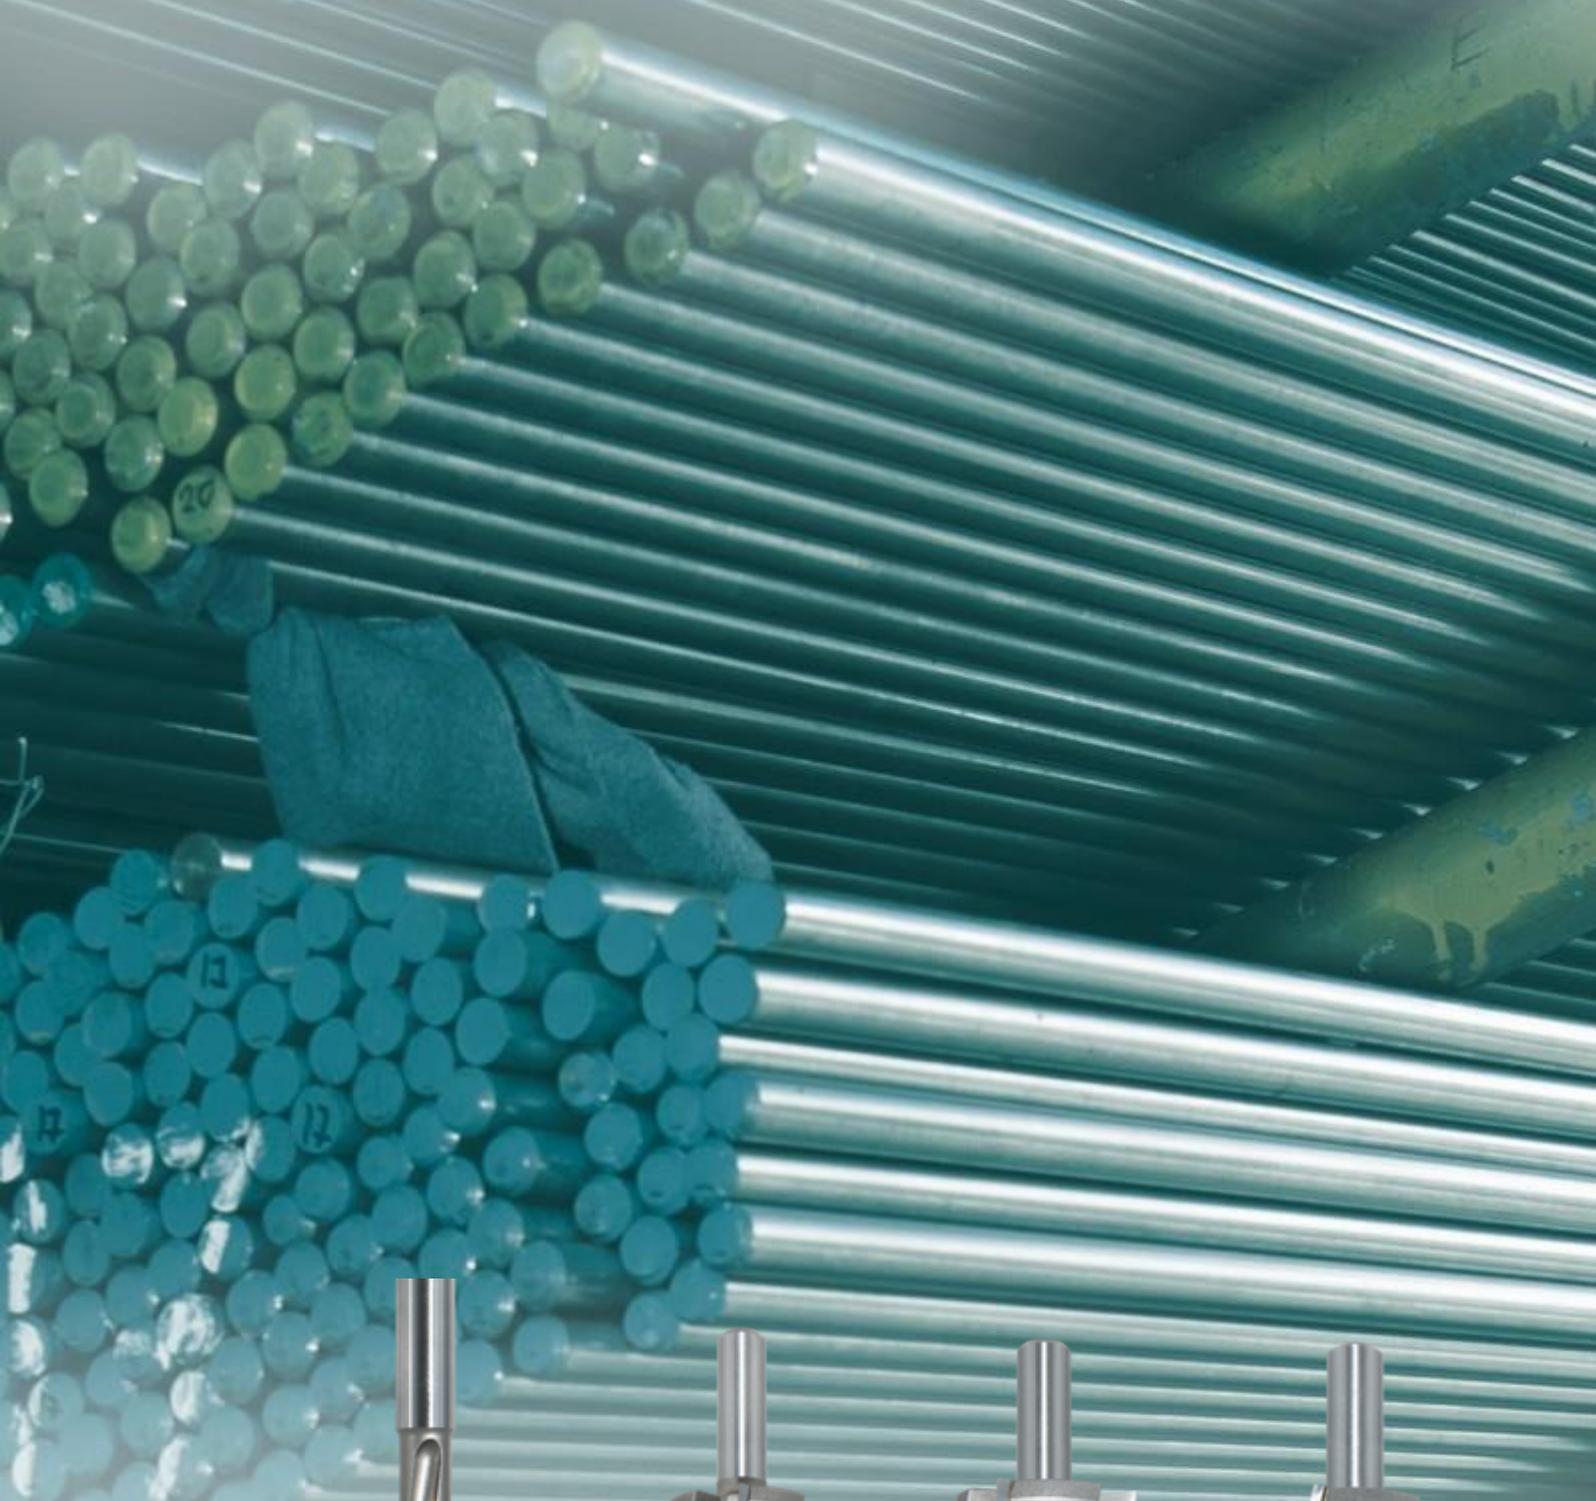

2005



2009



2011



2019

Year Developed

# Technical Information

Tungsten Carbide Tipped (TCT) tools (1) have carbide tips brazed onto a steel body. Solid Carbide tools are ground from a solid piece of Tungsten Carbide. Both are designed to cut hard and soft wood, chipboard, MDF, plywood, plastic, Corian and other solid surface sheet goods.



WPW TCT tools with “K-Carbide” grade have up to 200 % longer lifetime than tools with standard carbide. Developed especially for working on materials that consist of synthetic polymer resins for bonding purposes, the K- carbide is excellent for cutting MDF, HDF and other hard materials.

Solid Carbide Spiral CNC Bits (2) can work with higher feed rates and have longer tool life than TCT tools. These tools cut using less energy and with less vibration, leaving a perfect and clean finish on hardwood, softwood and man-made materials.

Aluminium and brass can also be cut, but only on stationary machines, provided that proper clamping devices are employed and the proper speed (RPM) and coolant are used.


Diamond Tipped PCDRouter Bits (3) last 30- 50 times longer than Carbide tools and are very efficient in cutting abrasive materials including composites, particleboard, MDF and hardwoods.

Diamond Grit Coated Router Bits (4) are designed for cutting Fiberglass, Carbon Fiber and other Composite materials.



## Shank and Collet

Always use the largest diameter shank available that your router will accommodate. Use the correct size collet. Proper collet condition is of extreme importance. Worn out or distorted collets do not provide adequate holding power and increase run-out and vibration. At least 3/4 of the shank length should be inserted into the collet. The best way is to insert it completely and then, back off slightly - 1.5mm approx.

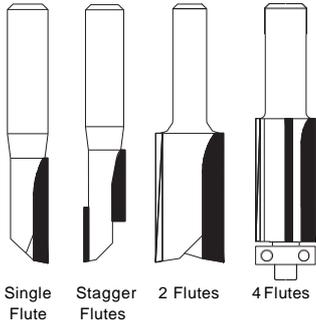

## Flutes

When the routing is inside the material, more flutes mean less space for the chips to clear out. Higher “chip load” is created. This requires slowing down the feed rate. The chips, tend to get hot and the material being cut starts to burn and the bit overheats.

**Single flute** Bits are used for free cutting and roughing with fast feed rates.

**Stagger-Tooth** combine the fast stock removal of single-flute bits with a better balance and increased strength.

**Double flute** Router bits are good for roughing and finishing, and are the preferred choice for most woodworking jobs.

**3flute bits** are better for finishing and have longer tool life while working on hard materials, such as solid surface materials or even aluminum. However, if the chips are not cleared fast enough, the feedrate must be slowed down.


**4flute bits** are recommended when feeding the router along the outside edges of a work- piece, like in profiling jobs. They provide an extremely smooth finish.

## Cutter Clearance - Relief

The relief on the carbide-cutting tip of straight router bits can be ground with either Radial Relief or Straight Relief.

**Radial relief** is preferred for professional applications, as it keeps a strong cutting edge, achieving longer lifetime. After resharpening, it ensures that the Tool Diameter will be as close as possible to the original Diameter. WPW professional straight bits are ground this way to give the best possible performance.

**Straight relief** gives a sharper edge, it is more aggressive but it will not last as long. It is simpler to grind than the radial relief, but it is not recommended for working on hard materials. Our Woodpecker tools have a straight relief.

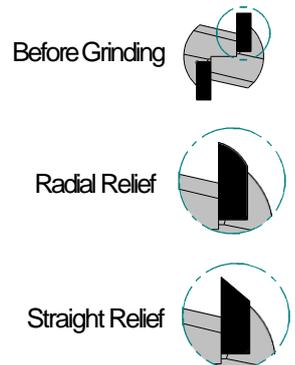


## Shear Angle

Straight Shear Bits and Solid Carbide Spiral Bits are made with negative - “down shear” or positive - “up shear” angle of the cutting edges. By spreading the cutting action over a larger part of the tool, they produce smoother cuts with less energy and less vibration, than standard Straight Bits. This is the reason why profile router bits and cutters are usually made with an up shear angle, and this is also the advantage of straight spiral bits. Straight Shear Bits are a compromise between the standard Straight Bits and the expensive, industrial Solid Carbide Spiral Bits.

“Up shear” / Upcut geometry pulls the chips from the working area, allowing deep grooving and higher feed rates.

“Down shear” / Downcut geometry directs chips towards the work piece and results smoother cut and cleaner edge of laminated boards.

The combination of Upcut and Downcut design, also called: “Compression”, is suitable for perfect cutting with clean edges of double-sided laminated materials.

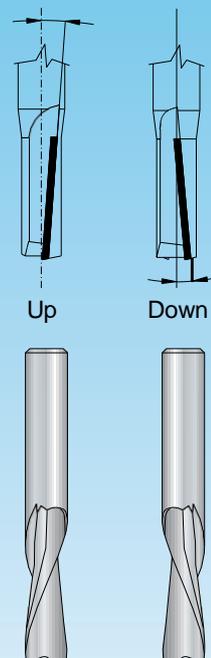

## About Cutting and Router Speeds

We are often asked about recommended cutting speed for routing. The answer is complicated. The maximum allowed cutting speed for Carbide Router Bits depends on many factors such as:

1. Material type and hardness.
2. Stability of the system: machine, chuck, work piece.
3. Tool length and depth of cut.

The general formula for calculating Router speed (n) is:  $n =$

$$\frac{V \times 60 \times 1000}{\pi \times \varnothing D}$$

n = router speed in RPM

V = cutting speed in meter/sec.

∅D = router bit's diameter in mm

π = 3.14...

### RECOMMENDED CUTTING SPEED

Material	V
Softwood	60 - 90
Hardwood	50 - 80
Chipboard	60 - 80
Plywood	60 - 80
MDF	40 - 60
Laminates	40 - 60

This speed is not always practical. Taking into consideration the speed and the power of Router machines that are available in the market, we suggest the following router speeds in terms of RPM (Revolutions Per Minute).


### SUGGESTED ROUTER SPEED- RPM

∅D	n (RPM)
Up to 25mm (1")	30,000
Up to 35mm (1-5/8")	28,000
Up to 50mm (2")	20,000
Up to 65mm (2-1/2")	18,000
Up to 80mm (3-1/4")	16,000
Up to 95mm (3-3/4")	12,000



# WPW Router Bit Features

Strict Quality Control to precise standards.  
Every tool undergoes inspection after production.

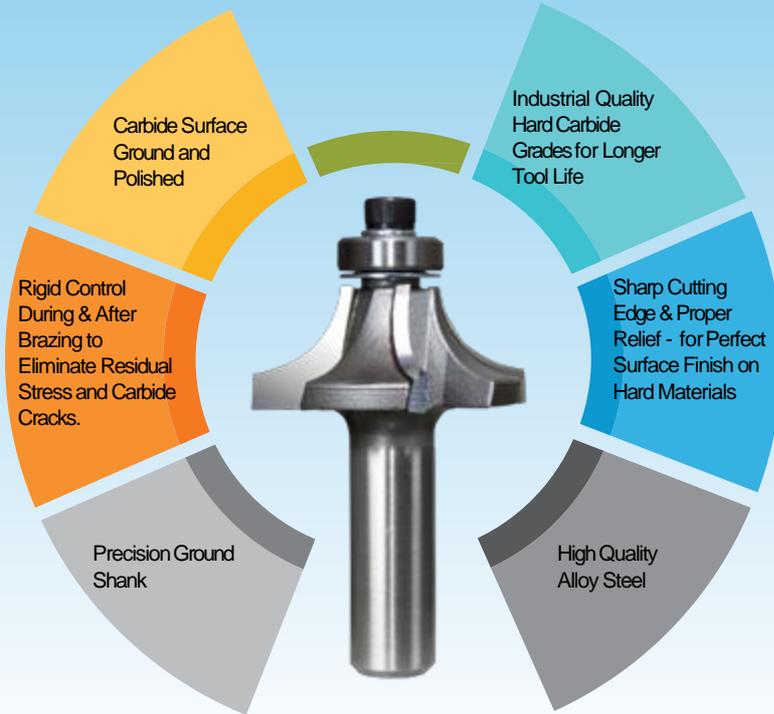

## General Safety Information

Router machines running at high speeds can be dangerous, as the cutting tools may chip or fragment.

- Follow safety instructions supplied with your power tool.  
Clean & dust machines regularly.
- Always wear eye, ear and respiratory protection while operating routers.
- Keep your fingers away from the tool while the machine is working.
- Unplug your router whenever changing the bit.
- Insert at least 3/4 of the shank into the collet.
- Donot cut too deep in one go. Feed router with suitable force in order to avoid overload.

- Feed router in correct direction - against the rotation of the bit.

- Remove the tool from the collet when not in use.
- Don't use worn out collets, and always use the correct size.
- Always have your cutting tool sharpened by a skilled worker using the proper grinding equipment.
- While resharpening tools, use adequate ventilation. The grinding process will produce dust that has potentially hazardous ingredients.



# ALPHABETICAL INDEX

<a href="#">ABB</a> .....	11	<a href="#">FJ2</a> .....	72	<a href="#">P3,P3U</a> .....	34	<a href="#">RV</a> .....	56
<a href="#">AC0.D</a> .....	12	<a href="#">FJ4</a> .....	72	<a href="#">P4.C</a> .....	76	<a href="#">RWV.C</a> .....	75
<a href="#">AC0.M</a> .....	10	<a href="#">FJ5</a> .....	72	<a href="#">P32</a> .....	35	<a href="#">RW</a> .....	63
<a href="#">AC0.T</a> .....	12	<a href="#">FJ6</a> .....	72	<a href="#">P42</a> .....	35	<a href="#">RWB</a> .....	64
<a href="#">AC2/AS2</a> .....	13	<a href="#">FM</a> .....	44	<a href="#">PD</a> .....	26	<a href="#">RW.C</a> .....	75
<a href="#">AC3</a> .....	24	<a href="#">FO</a> .....	44	<a href="#">PF</a> .....	38	<a href="#">RWG</a> .....	64
<a href="#">AC4</a> .....	13	<a href="#">FPM</a> .....	41	<a href="#">PF..0</a> .....	84	<a href="#">RWG.C</a> .....	75
<a href="#">AC4.D</a> .....	12	<a href="#">FPM.C</a> .....	74	<a href="#">PF.C</a> .....	74	<a href="#">RZ</a> .....	61
<a href="#">AC4M</a> .....	13	<a href="#">FPS</a> .....	41	<a href="#">PFM</a> .....	40	<a href="#">SOC</a> .....	29
<a href="#">ACD</a> .....	14	<a href="#">FS</a> .....	45	<a href="#">PFS</a> .....	39	<a href="#">SOF</a> .....	51
<a href="#">ACF</a> .....	24	<a href="#">FSG</a> .....	45	<a href="#">PFT</a> .....	40	<a href="#">SOF.W</a> .....	51
<a href="#">ACK</a> .....	24	<a href="#">FT</a> .....	44	<a href="#">PG</a> .....	27	<a href="#">SOPP</a> .....	51
<a href="#">ACM</a> .....	13	<a href="#">FU</a> .....	44	<a href="#">P.L</a> .....	33	<a href="#">SORB</a> .....	52
<a href="#">AF</a> .....	14	<a href="#">HCP</a> .....	13	<a href="#">PL</a> .....	17	<a href="#">SCSL</a> .....	51
<a href="#">AFP.M</a> .....	10	<a href="#">HE</a> .....	79	<a href="#">PLP</a> .....	17	<a href="#">SCSL.W</a> .....	51
<a href="#">ALB</a> .....	11	<a href="#">HES</a> .....	79	<a href="#">PP</a> .....	50	<a href="#">SCU</a> .....	29,76
<a href="#">AQP</a> .....	11	<a href="#">HF</a> .....	78	<a href="#">PP2</a> .....	50	<a href="#">SCS</a> .....	29
<a href="#">AQPS</a> .....	17	<a href="#">HMP</a> .....	15	<a href="#">PPC</a> .....	50	<a href="#">SCV</a> .....	52
<a href="#">AS4.D</a> .....	14	<a href="#">HMPAL</a> .....	15	<a href="#">PS</a> .....	34	<a href="#">SE</a> .....	52
<a href="#">ASD</a> .....	14	<a href="#">HMPS</a> .....	15	<a href="#">PT</a> .....	32	<a href="#">SL</a> .....	45,46
<a href="#">ASO.S</a> .....	14	<a href="#">HMPT</a> .....	15	<a href="#">PU</a> .....	34	<a href="#">SL2</a> .....	46
<a href="#">ASO.T</a> .....	14	<a href="#">HMZ.0</a> .....	18	<a href="#">QC</a> .....	18	<a href="#">SL3</a> .....	46
<a href="#">ATP</a> .....	11	<a href="#">HMZ.4</a> .....	18	<a href="#">QCS</a> .....	17	<a href="#">SL4</a> .....	46
<a href="#">B</a> .....	84	<a href="#">HP</a> .....	78	<a href="#">RA,RRA</a> .....	58	<a href="#">SLS.C</a> .....	74
<a href="#">B.C</a> .....	76	<a href="#">HFF</a> .....	78	<a href="#">RB</a> .....	55	<a href="#">SR1</a> .....	26
<a href="#">BD</a> .....	84	<a href="#">HRB</a> .....	80	<a href="#">RBL</a> .....	56	<a href="#">SR2</a> .....	26
<a href="#">BR/BT</a> .....	85	<a href="#">HRD</a> .....	80	<a href="#">RC</a> .....	57	<a href="#">SR3</a> .....	26
<a href="#">BTAT</a> .....	18	<a href="#">HRJ</a> .....	80	<a href="#">RD</a> .....	60	<a href="#">ST</a> .....	35
<a href="#">CM</a> .....	85	<a href="#">HRP</a> .....	81	<a href="#">REOG</a> .....	65	<a href="#">STS</a> .....	35
<a href="#">DB</a> .....	56	<a href="#">HRW</a> .....	81	<a href="#">RF</a> .....	64	<a href="#">TA</a> .....	22,23
<a href="#">DB.C</a> .....	76	<a href="#">HRZ</a> .....	80	<a href="#">RG1</a> .....	68	<a href="#">TAB</a> .....	18
<a href="#">DC</a> .....	57	<a href="#">HS</a> .....	13	<a href="#">RG2</a> .....	68	<a href="#">TACB806</a> .....	12
<a href="#">DDB</a> .....	21	<a href="#">HS04RV5</a> .....	81	<a href="#">RG3</a> .....	68	<a href="#">TACBM806</a> .....	12
<a href="#">DDT</a> .....	21	<a href="#">HS06</a> .....	81	<a href="#">RG5</a> .....	69	<a href="#">TACP806</a> .....	12
<a href="#">DL</a> .....	59	<a href="#">HSL</a> .....	79	<a href="#">RG6</a> .....	69	<a href="#">TAF080H</a> .....	12
<a href="#">DM</a> .....	58	<a href="#">HV</a> .....	80	<a href="#">RGD2</a> .....	67	<a href="#">TATM</a> .....	19
<a href="#">DR</a> .....	19	<a href="#">HZ</a> .....	79	<a href="#">RGD5</a> .....	67	<a href="#">TATP</a> .....	18
<a href="#">DRK</a> .....	19	<a href="#">MB</a> .....	36	<a href="#">RH</a> .....	57	<a href="#">TDS</a> .....	18
<a href="#">DRS</a> .....	19	<a href="#">MB..0</a> .....	36	<a href="#">RJ</a> .....	60	<a href="#">TK</a> .....	22
<a href="#">DRT</a> .....	19	<a href="#">MM</a> .....	59	<a href="#">RK</a> .....	66	<a href="#">TM</a> .....	23
<a href="#">DT</a> .....	36	<a href="#">MN</a> .....	16	<a href="#">RK04</a> .....	66	<a href="#">T/TL</a> .....	83
<a href="#">E2</a> .....	47	<a href="#">MNK</a> .....	16	<a href="#">RK15</a> .....	66	<a href="#">TX</a> .....	83
<a href="#">E3</a> .....	47	<a href="#">MNS</a> .....	16	<a href="#">RK20</a> .....	66	<a href="#">UB2</a> .....	37
<a href="#">E3SG</a> .....	50	<a href="#">MNT</a> .....	16	<a href="#">RK40</a> .....	66	<a href="#">UB3</a> .....	37
<a href="#">E4</a> .....	47	<a href="#">MP</a> .....	15	<a href="#">RK43</a> .....	67	<a href="#">US2</a> .....	37
<a href="#">E4S</a> .....	49	<a href="#">MPK</a> .....	22	<a href="#">RL</a> .....	62	<a href="#">US3</a> .....	37
<a href="#">E33</a> .....	48	<a href="#">N</a> .....	84	<a href="#">RM</a> .....	61	<a href="#">V</a> .....	53
<a href="#">EM</a> .....	48,76	<a href="#">N3</a> .....	70	<a href="#">RN</a> .....	62	<a href="#">VE</a> .....	53
<a href="#">ES</a> .....	48	<a href="#">NB</a> .....	70	<a href="#">RO</a> .....	65	<a href="#">VG</a> .....	54
<a href="#">F2</a> .....	42,43	<a href="#">NBS</a> .....	70	<a href="#">RO.C</a> .....	75	<a href="#">Z</a> .....	54
<a href="#">F2.C</a> .....	74	<a href="#">NVB</a> .....	36	<a href="#">RP</a> .....	62	<a href="#">ZB</a> .....	54
<a href="#">F3</a> .....	43	<a href="#">NS</a> .....	71	<a href="#">RR</a> .....	58,59		
<a href="#">F4</a> .....	43	<a href="#">NUS</a> .....	71	<a href="#">RRC</a> .....	58		
<a href="#">F4.C</a> .....	74	<a href="#">P1</a> .....	33	<a href="#">RRI</a> .....	59		
<a href="#">F4P</a> .....	41	<a href="#">P2</a> .....	30,31	<a href="#">RS</a> .....	60		
<a href="#">FD</a> .....	27	<a href="#">P2.XK</a> .....	32	<a href="#">RT</a> .....	61		
<a href="#">FG</a> .....	27	<a href="#">P3F</a> .....	39	<a href="#">RU</a> .....	55		



**WPW**  
CREATIVE CUTTING SOLUTIONS

26 Hahemesh St. Industrial Area, Karmiel

P.O.Box 6444, Karmiel 2165270 Israel

Tel: +972 4 998 9482 | Fax: +972 4 988 2817

[www.wpw-tools.com](http://www.wpw-tools.com) | [info@wpw.co.il](mailto:info@wpw.co.il)

